



AAA USB-C Rechargeable Battery

PN: 30250

With an approximate 500 mAh (750 mWh) capacity and stable 1.5 V output, these rechargeable AAA batteries provide dependable power for compatible everyday devices as remote controls, wireless accessories, radios and other small household electronics.


Charging your AAA batteries is as easy as charging your other USB-C devices. Simply connect the included 4-in-1 USB-C cable directly to the batteries – no separate battery charger required. Each battery takes approximately 2 hours to charge.

- Charge directly via USB-C – no separate battery charger needed
- Rechargeable over 1,000 times for long-lasting value
- Stable 1.5 V output for reliable everyday performance
- Approx. 500 mAh (750 mWh) capacity
- Built-in LED shows charging status at a glance
- Charge up to four batteries simultaneously with the included cable
- Lightweight 7.1 g design for convenient everyday use
- Ideal for compatible AAA devices and low-drain applications
- A convenient alternative to disposable AAA batteries

Compatible with USB chargers, QC fast chargers, power banks, car chargers and computers. (Not to be used with chargers for other battery types or voltages above 5 V.)



Built-in
USB-C



1000+
Cycles





LED Charge
Indicator



PN: 30250

Product Specifications

Battery Chemistry: Lithium
 UN code (dangerous goods): UN3480
 Nominal Voltage: 1.5 V
 Capacity: Approx. 500 mAh (Minimum 475 mAh) / 750 mWh
 Recharge Cycles: ≥300 cycles to 80% capacity; up to approx. 1,000 cycles (10-20% capacity remaining)
 Charging Mode: USB-C
 Charging Time: 2.0 h ±0.5 h
 Charging Voltage: 5.0 V
 Max Charging Current: ≤110 mA
 Charging Indicator: LED flashing = charging; LED solid = full
 Charging Temperature: 0–35°C
 Recommended Discharge Current: ≤100 mA
 Maximum Discharge Current: ≤500 mA
 Operating Temperature (Discharge): –10°C to +45°C
 Maximum Time Empty Before Recharge: ≤60 days
 Weight: 7.1 ±0.5 g per battery
 Dimensions: Ø10.2 ±0.3 mm × 44.0 ±0.5 mm

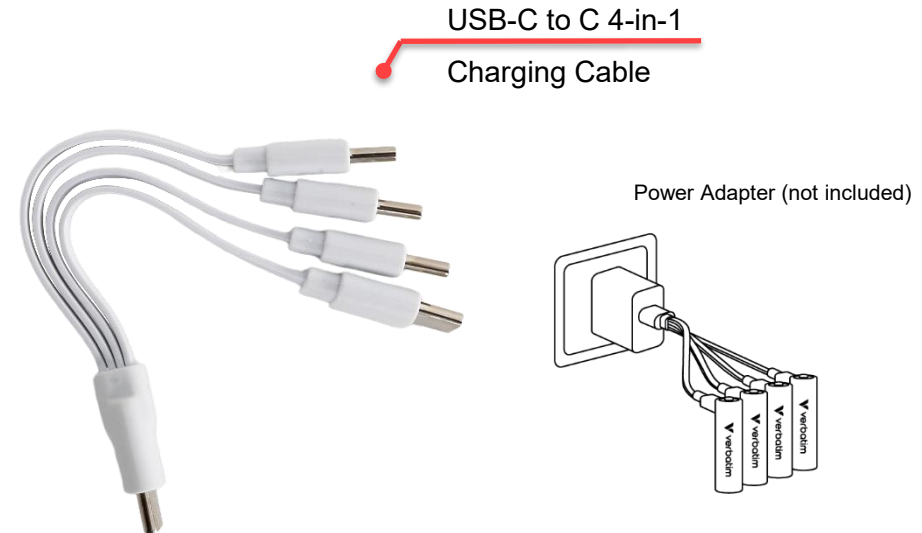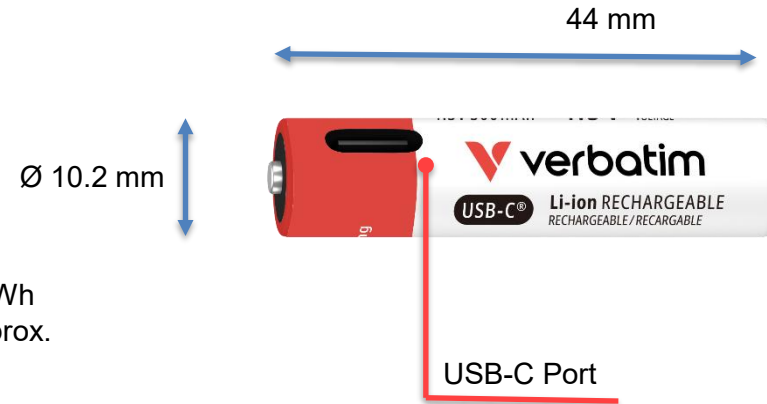

Storage and Operating Conditions

Charging Temperature: 0°C to 35°C
 Operating Temperature (Discharge): -10°C to +45°C
 Operating Humidity: 55% RH (+20% / -40%)
 Storage Temperature: 0°C ~ +35°C

Languages

Front of pack: English
 Back of pack: English, French, German, Dutch, Italian, Spanish, Portuguese, Polish, Russian, Czech, Hungarian, Greek, Serbian, Croatian, Traditional Chinese, Simplified Chinese, Korean, Japanese

Quick Installation Languages

English, French and German + Technical support text in English, French, German, Dutch, Italian, Spanish, Portuguese, Polish, Russian, Czech, Hungarian, Serbian, Croatian, Traditional Chinese, Simplified Chinese, Korean, Japanese

Reorder No.	Description	Tariff Code	Barcode	EAN-128	EAN-14
30250	Verbatim AAA USB-C Rechargeable Battery (Pack of 4)	85076000	023942302506	(02)00023942302506(37)0192(91)46 (02)00023942302506(37)0384(91)46	20023942302500 50023942302501

Reorder No.	30250
Product Dimensions L x W x H	10,2 x 44 mm
Product Weight	7,1 g
Units per Pack	4
Pack Dimensions L x W x H	122 x 87 x 17 mm
Pack Weight	62,8 g
Units per Outer Carton (MOQ)	48 packs (192 single cells)
Outer Carton Dimensions L x W x H	196 x 123 x 100 mm
Outer Cartons Weight	829,6 g
Outer Cartons per Layer	96 packs (384 single cells)
Layers per Pallet	3
Units per Pallet	11520



Pack Content

- 4 × Verbatim AAA USB-C Rechargeable Batteries
- USB-C to C 4-in-1 Charging Cable
- Quick Start Guide