Technical Specifications

HP E24 G4 FHD Monitor




1. OSD Buttons

Front

2. Power Button

Technical Specifications

HP E24 G4 FHD Monitor

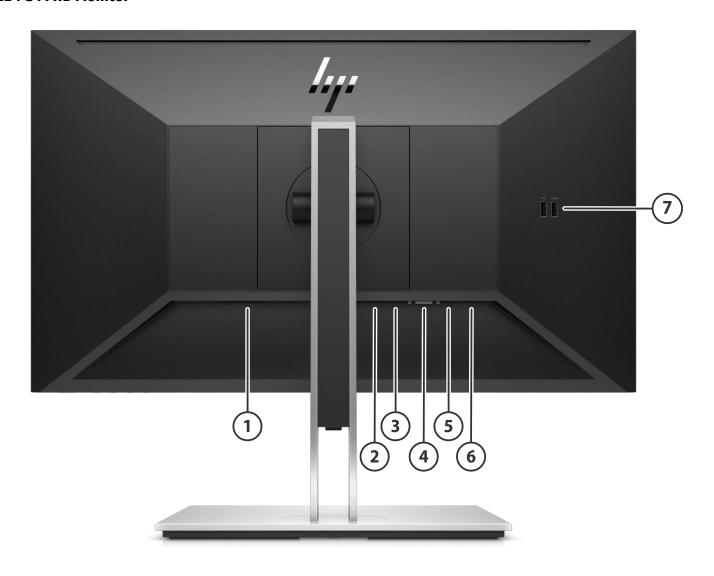

٩	1	Dowor	Connector
ı	I .	rowei	COMMECTOR

- 2. DisplayPort™
- 3. HDMI Port
- 4. VGA Port

Back

- 5. USB-B Port
- 6. USB-A Ports (2)
- 7. USB-A Ports (2)



Technical Specifications

Models: 9VF99AA

Panel SpecificationsDisplay Size (Diagonal)23.8-inDisplay Panel TypeIPS

Micro-Edge BezelYes, 3-sidedNative Resolution/Timing1920 x 1080 @60HzPanel Bit Depth8bit (6bit + FRC)

Aspect Ratio 16:9
Brightness - Typical 250 cd/m²
Static Contrast Ratio - Typical 1000:1
Static Contrast Ratio - Minimum 700:1
Dynamic Contrast Ratio (DCR) 5M:1
Flicker Free Yes

Pixel Pitch $0.2745 \text{ (H)} \times 0.2745 \text{ (V)}$

Pixels Per Inch (PPI) 92.5

Backlight Lamp Life (to half brightness 30k minimum

- in hours)

Anti-Glare Panel Yes

Response Time - Typical 5ms GtG (with overdrive)

Horizontal Viewing Angle (typical 178°

CR>10)

Vertical Viewing Angle (typical CR>10) 178°

Panel Active Area (w x h) $527.04(H) \times 296.46(V) \text{ mm}$

Preset Graphic Modes/Supported 640 × 480 @60Hz **Resolutions** 720 × 400 @70Hz

800 × 600 @60Hz 1024 × 768 @60Hz 1280 × 720 @60Hz 1280 × 800 @60 HZ 1280 × 1024@60Hz 1440 × 900 @60Hz 1600 × 900 @60Hz 1680 × 1050 @60Hz 1920 × 1080 @60Hz

Maximum Resolution1920 × 1080 @60HzRecommended Resolution1920 × 1080 @60Hz

Vertical Scan Range50-60HzHorizontal Scan Range30-80kHzDefault Color TemperatureNeutral (6500K)Maximum Pixel Clock Speed170MHz

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage NTSC 72%

Color Space / Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

Default Color Temperature Neutral (6500 K)

Low Blue Light Modes Yes, HP Eve Ease (TÜV Low Blue Light Hardware Solution

certified)

RGB Channel Adjust Yes

Monitor Specifications Exterior Color of Monitor Bezel and Black head, Silver stand

Stand

Plug & Play Yes

Technical Specifications

Tilt -5° to +23° **Swivel** +/-45° **Pivot** +/-90° **Height Adjustment Range** 150mm **VESA Mounting** Yes, 100 mm

Security Lock Ready Detachable Base Yes, ships detached Warranty Based on region

On Screen Display (OSD)

Specifications

Class (ERP lot-5)

On Screen Display User Controls Brightness+, Color, Image, Input, Power, Menu,

Yes

Management, Information

Menu, Minus ("-")/Information, Plus ("+") / Viewing Mode, **Monitor Control Buttons or Switches**

OK/Next Active Input, Power

User-Assignable Function Buttons Yes, 3 (6 Options)

Languages 10 (German, Dutch, T-Chinese and S-Chinese, English,

Spanish, French, Italian, Japanese, Portuguese)

DisplayPort™ 1 DisplayPort™ 1.2 in **Connector Types**

HDMI 1 HDMI1.4

VGA

HDCP support Yes, (DisplayPort™ and HDMI)

USB Port 3.2 **USB Version**

USB Hub Yes

Downstream Ports 4 Ports **Upstream Ports** 1 USB-B port

Fast Charging USB Ports 1 Port (Side) (USB-A) **Power Output Maximum** Fast Charging: 7.5 W

Special Features User Presets Yes

> **User Updateable Firmware** Yes

Power & Operating Power Supply Internal Specs

100 - 240 VAC 50/60 Hz **Power Source** Power Consumption - Maximum 51 W

Energy Saving/Standby Mode 0.5 W **Power Consumption - Typical** 26 W Power cable length 1.9 m

EU Energy Efficiency On-mode Power Consumption 14 W

> 26 kWh **Annual Power Consumption Energy Efficiency Class**

Visible Screen Size 23.8" / 60,5 cm Diagonal

Operating Conditions Operating Temperature - Celsius 5°-35°C **Operating Temperature - Fahrenheit** 41°C - 95°F

Non-operating Temperature - Celsius -34° - 60°C Non-operating Temperature --29° - 140°F

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-operating Humidity 5 - 95%

Operating Altitude 0 - 5,000 m (16,400 ft.)

Technical Specifications

Non-operating Altitude	0 – 12,192 m (40,000 ft.)	

Environmental Features and **Certifications**

Mercury-free LED display backlighting **Arsenic-Free Display Glass**

Low Halogen*

Yes, Mercury-free LED backlighting

Yes

GSE HP-00011-01B, table 2 defines low-halogen (BFR, CFR,

PVC)

Agency Approvals and Certifications WW certificate

> CE, CB, KC/KCC/NOM/ISO 9241-307/ EAC/TUV-GS/cTUVus/PSB/CCC/CEL/ISC/VCCI/FCC/BSMI/Vietnam MEPS/Australian-New Zealand MEPS/WEEE/BIS/CEC/E-

Standby/Low Blue Light/CECP/TUV-S/CECP

Microsoft WHQL Certification

ENERGY STAR®

EPEAT® Registered* TCO Certified

Container Load, 40-Foot

Container Load, 40-Foot HighQ

Win 10, Win 8, Win 7

Yes, ENERGY STAR® 8

Yes

Yes

China Energy Label SmartWay Transport Partnership - NA

only

Yes (NA SKU)

*External power supplies, power cords, cables and peripherals are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.

CEL Grade 1

Note: DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

	Contains Recycled Plastics	85% recycled content by to	otal weight
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	53.94 x 20.7 x 49.49 cm	21.24 x 8.15 x 19.48 in
•	Product Dimensions (Packed) (W x D x H)	61.1 x 22.3 x 39.2 cm	24.06 x 8.78 x 15.43 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	53.94 x 4.7 x 32.33 cm	21.24 x 1.85 x 12.73 in
	Base Area Footprint	260 x 207 mm	10.24 x 8.15 in
	Bezel Measurements	Bottom 19.59 mm (display chin)	Bottom 0.77 in (display chin)
	Product Weight (Unpacked with stand)	5.7 kg	12.54 lb
	Product Weight (Packed)	8.4 kg	18.5 lb
	Product Weight (Head Only)	3.27 kg	7.21 lb
Pallet Information	Pallet Dimensions	1230 x 1150 x 2089 mm	48.43 x 45.28 x 82.24 in
	Pallet Total Weight (L x W x H)	40" GQ: 384 kg 40" HQ: 476 kg	40" GQ: 847 lbs 40" HQ: 1050 lbs
	Pallet Layers	GQ: 4 HQ: 5	
	Pallet Product per Layer	10	
	Total Products per Pallet	50	
	Container Load, 20-Foot	460	

960

1152

Technical Specifications

Software Included HP Display Center

What's in the box? 1 HDMI (1.8 m) 5.9 ft

1 DisplayPort™ (DisplayPort™ 1.2) (1.8 m) 5.9 ft 1 Power Cord (1.9 m) 6.2 ft 1 USB-B to A cable (1.8 m) 5.9 ft

1 QSP 1 Doc-Kit

User Guide and Warranty Languages **User Guide Languages** English, Arabic, S. Chinese, T. Chinese, Czech, Danish,

Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.

Warranty Languages English, Arabic, S. Chinese, T. Chinese, Czech, Danish,

Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and

Turkish.



Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log				
January 3, 2021	V1 to V2		Techspecs Updated	
February 28, 2021	V2 to V3		Energy Efficiency Class Updated	

