




### Disposal and recycling information

 The crossed-out wheeled bin symbol means that this product must be disposed separately from household waste. As an end user, you are obliged to dispose the product in accordance with the respective national regulations for separate collection, for example by depositing it at an official collection point. Returning it to the retailer is also possible if the distributor offers voluntary return or is legally obliged to do so.

Separate collection is a valuable contribution to the protection of the environment and human health, as the proper treatment of waste equipment avoids potential negative effects caused by the presence of hazardous substances and protects raw materials by recovering them.

In addition, please note that waste prevention makes an even more valuable contribution to environmental protection. Where possible, therefore, in addition to continued own use or repair, handing over to secondary users is an ecologically valuable alternative to disposal.

Bechtle Logistik & Service GmbH  
Bechtle Platz 1  
74172 Neckarsulm | Germany  
bechtle.com | articonasupport.ls@bechtle.com


25\_12\_4857733\_PoE-Injector\_Leaflet

USER MANUAL.

EN

4857733

## 2.5G 30W PoE Injector

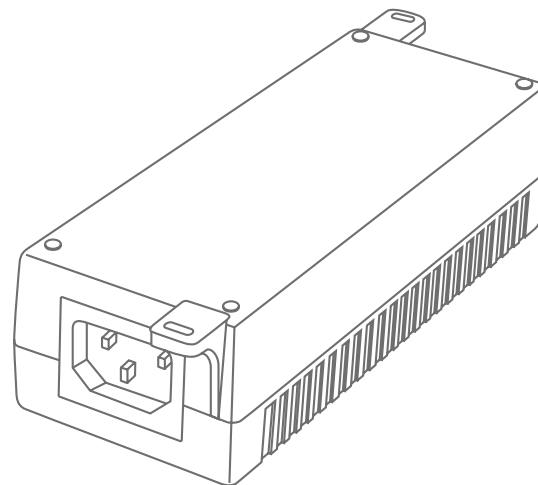


Please read these instructions carefully before using the product and store them properly.

 **ARTICONA**


## Features

- 1× 2.5G PoE Port and 1× 2.5G Ethernet Port
- The PoE port supports a maximum output power of 30W
- Supports 10/100/1000M/2.5G self-adaption
- Support AC 100–240V voltage input
- Working temperature range -20 °C ~ + 50 °C
- Seamless ultrasonic bonding for better protection effect.
- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE802.3bz standards
- Support Port Auto Flip (Auto MDI/MDIX)
- Compatible with IEEE802.3af (15.4W) and IEEE802.3at (30W)
- Supports wall-mount

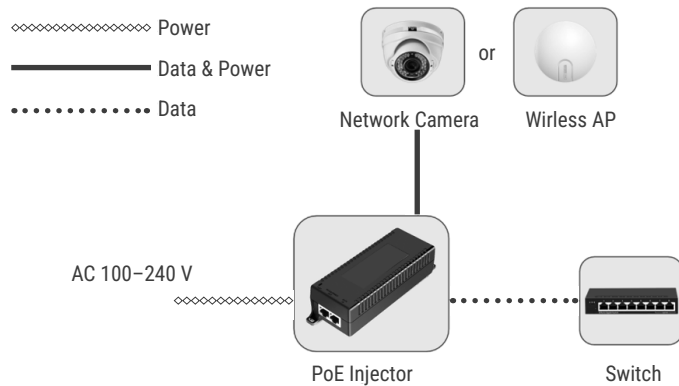

## LED Status

Green: POWER ON  
 Red: PoE ON  
 Light off: POWER OFF

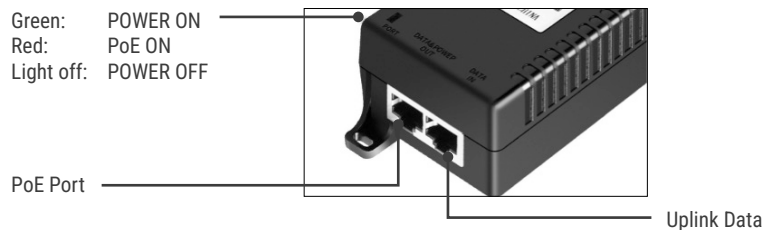

## Specifications

Power	AC 100–240 V
Ethernet	1× 10/100/1000M/2.5G Ethernet Port 1× 10/100/1000M/2.5G PoE Port
Network protocol	IEEE802.3 (10Base-T) IEEE802.3u (100Base-TX) IEEE802.3ab (1000Base-TX) IEEE802.3bz (2.5GBase-T) IEEE802.3x (Flow control)
PoE protocol	IEEE802.3af (15.4 W) IEEE802.3at (30W) PoE output voltage: DC52V PoE Power Pin: 1/2- ; 3/6+
EMC Standard	EMI: CISPR (EN55032) Class A EMS: EN61000-4-2 (ESD), EN61000-4-4 (EFT) Shock: IEC 60068-2-27 Free Fall: IEC 60068-2-32 Vibration: IEC 60068-2-6
Network Medium	10Base-T: Cat3, CAT4, CAT5 or above UTP ( ≤ 100 m) 100Base-TX: Cat5 or above UTP ( ≤ 100 m) 1000Base-TX: Cat5 or above UTP ( ≤ 100 m)
Working Environment	Working Temperature: -20~50°C Storage Temperature: -40~80°C Working Humidity: 10%~90%, non-condensing Storage Humidity: 5%~90%, non-condensing
Status Indicator	LED color indicator
Dimension	Product Size: 142 × 55 × 40 mm Package Size: 203 × 160 × 55 mm Product Net Weight: 200 g Product Gross Weight: 400 g

## Safety Precautions

- This PoE injector is for indoor use only.
- Please do not open or disassemble product on your own.
- Please contact the manufacturer for support in case of damage or malfunction.
- Always ensure this device is properly grounded during operation.
- Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

## Package Contents

Before attempting to use this unit, please check the packaging and make sure the following items are contained in the shipping carton:

- PoE Injector ×1
- User Manual ×1
- AC Power Cord ×1