



PROJECTOR  
**PA700S**


**Key Features**

- 4,500 ANSI Lumens, offering clear images in any environment
- Up to 300" ultra large screen with lower cost-per-inch
- Easy and flexible connection: dual HDMI ports, USB Type-A port
- Vivid colors with ViewSonic's SuperColor™ Technology
- Convenient software updates for projectors via USB connection



**Product Description**

The PA700S is ViewSonic's high brightness SVGA business/education projector. With 4,500 ANSI Lumens of highbrightness, the projector offers clear images of up-to-300" large screen in meeting rooms, classrooms, or anyother bright environment. The dual HDMI ports allow you to flexibly connect to multiple devices, easily switchingbetween content sources. The USB Type-A port can supply power to HDMI wireless dongles, making wireless contentstreaming more convenient. The projector also allows software updates via USB cable connection with simply yourlaptops, skipping trips to service centers.

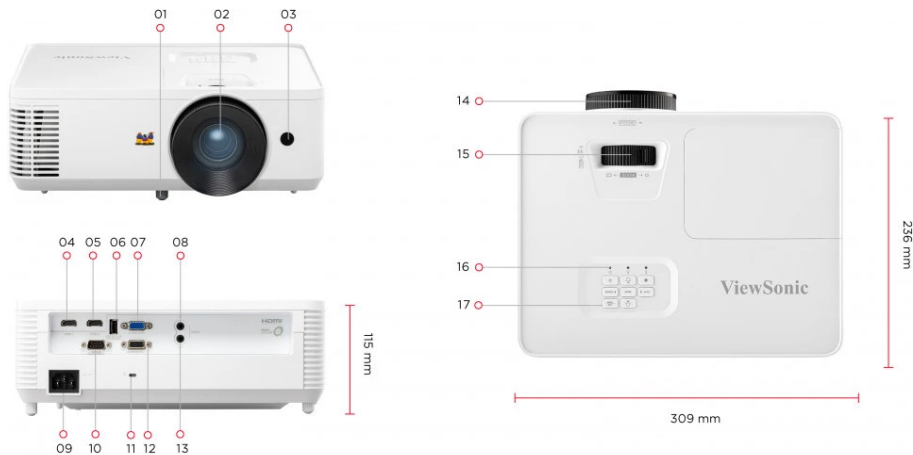

- |                             |                     |                   |
|-----------------------------|---------------------|-------------------|
| 01. Adjustment Foot         | 08. Audio In        | 15. Zoom Ring     |
| 02. Lens                    | 09. AC In           | 16. LED Indicator |
| 03. Front IR                | 10. R232            | 17. Keypad        |
| 04. HDMI 1                  | 11. Kensington Lock |                   |
| 05. HDMI 2                  | 12. Monitor Out     |                   |
| 06. USB-A(5W/1.5A, Service) | 13. Audio Out       |                   |
| 07. Computer In             | 14. Focus Ring      |                   |

**Visit Us** [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Native Resolution:	800x600
Brightness:	4500 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	12500:1
Display Color:	1.07 Billion Colors
Light Source Type:	240W UHP Lamp
Light Source Life (hours) with Normal Mode:	4000
Light Source Life (hours) with SuperEco Mode:	12000
Lens:	F=2.42-2.53, f=21.85-24.01mm
Projection Offset:	115%+/-5%
Throw Ratio:	1.94-2.16
Optical Zoom:	1.1x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	1.18m-13.17m (100"@3.94m)
Keystone:	+/- 40° (V)
Audible Noise (Normal):	34dB
Audible Noise (Eco):	25dB
Input Lag:	33.2ms
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

**INPUT**

Computer in (share with component):	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

**OUTPUT**

Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	3W
USB Type A (Power):	1 (5V/1.5A)

**CONTROL**

RS232 (DB 9-pin male):	1
USB Type A (Services):	1 (share with USB A Output)

**OTHERS**

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 295W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.70kg
Gross Weight:	3.80Kg
Dimensions (WxDxH) with Adjustment Foot:	309x234x115mm
Packing Dimensions:	400x337x168mm
OSD Language:	English, German, French, Swedish, Spanish, Portuguese, Polish, Dutch, T. Chinese, S.Chinese, Finnish, Korean, Russian, Hungarian, Czech, Arabic, Thai, Turkish, Vietnamese, Indonesian, Greek, Italian, Total 22 languages
User Guide Language:	English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages

**STANDARD ACCESSORY**

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	Yes
Air Filter:	Yes (CN Only)
Warranty Card:	Yes (CN Only)

**OPTIONAL ACCESSORY**

Lamp/Light Source:	RLC-128
Air Filter:	RSPL
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008