


LED floor lamp MAULjura, dimmable

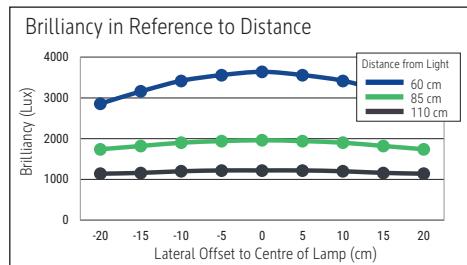

- **Stepless dimmer to adapt to the tasks and personal needs**
- **Powerful direct light for the work surface and indirect light for room lighting**
- **Professional floor lamp for the price-conscious**
- **Upward light dispersion 50 % and downward light dispersion 50 %**
- **Very economical: State of the art LED technology**
- **Designed by MAUL: Developed and constructed in Germany**
- **GS label for checked safety, technical safety concept Made by MAUL**
- Column and head made of high-quality aluminium
- Closed lamp head
- Convenient: Diffuser for reduction of shades
- Reduced glare to UGR <16 for fatigue-proof vision
- Guaranteed: No consumption in switch-off mode
- Practical: detachable mains cable makes it easier to set up the device
- Protection rating IP20
- Light source and operating device replaceable by an electrician
- Environmentally friendly recyclable packaging, free of plastic

Illuminance of the : 1.960 lux illuminance at 85 cm distance, 1.220 lux illuminance at 110 cm distance
 Colour temperature per light source: 4.000 Kelvin (neutral white)
 Number of light sources: 7
 Energy efficiency class per light source: D (spectrum A to G)
 Weighted energy consumption per light source: 62 kWh/1000 h (2 x 16 kWh/1000 h & 5 x 6 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 9200 lm (2 x 2500 lm & 5 x 840 lm)
 Material: Head: Aluminium - Column: Aluminium
 Dimensions: Head: 60 x 26 x 3.5 cm - Column: 5 x 3.6 x 116.5 cm
 Movement: Head: fixed
 Position of the switch: Column

- Stable steel clamp base, clamping range 1.5 to 9.5 cm. Surface-friendly underside. Height: 121 cm. Ideal for height-adjustable desks
- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8257202	white	4002390095143	94052190	clamp	2.50 m	I shock-proof plug	140,5 x 42 x 14,5 cm	8.585 kg	1 pc(s).
8257295	silver	4002390095150	94052190	clamp	2.50 m	I shock-proof plug	140,5 x 42 x 14,5 cm	8.585 kg	1 pc(s).