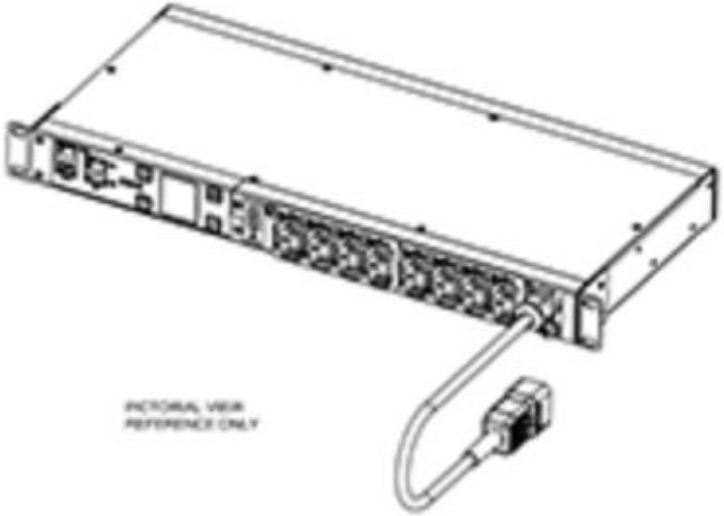

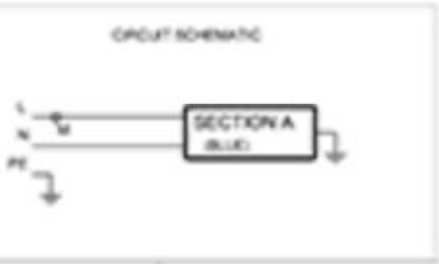

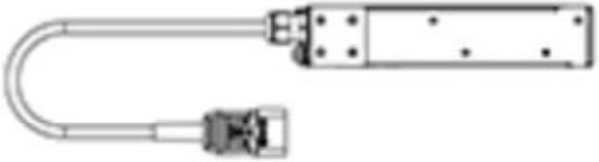

CABLE SHOWN NOT TO SCALE

EMAH28	G3 MANAGED		
NCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
RRENT POWER AND ERGY METERING FOR PUT, BRANCH AND OUTLETS, DIVIDUAL OUTLET CONTROL	IEC 60309 C20 16A 230V~ W+N+PE 1.9MM H05 POWER CORD CABLE LENGTH: 3.3 M	(8) IEC 60320 C13 GRIP	0 TO 55° C
CHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
NGTH: 203.2MM PTH: 444.5 MM PTH: 42.9MM UMINIUM CHASSIS, BLACK INCH RACK MOUNT	1Ø 200-240V~ (N+N+PE 50/60HZ 16A	200-240V~ 50/60HZ 16A PER C13 16A MAX TOTAL	CE, CB
RCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
NE	NONE	STANDARD KSP011 - 1U INSTALL NETWORK PACK OPTIONAL EMPSET - ENVIRONMENTAL PROBE	EMAGCHHFABBF3AM