

# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm

The massive canvas for the multitasking maestro

See more, do more, faster with one immersive canvas that supports up to two devices simultaneously for seamless edge-to-edge multitasking with the HP Series 5 Pro 49" DQHD Conferencing Monitor. Integrate AI conferencing and ecosystem connectivity with this ultrawide command center.



\*Product image may differ from actual product




## Dive into your work on an all-encompassing canvas

Uplevel your multitasking real estate by replacing dual monitors with a sweeping, immersive 49" curved display. Optimize your workflows by customizing your screen layouts with Virtual Multiple Display<sup>1</sup> and effortlessly switch between two computers<sup>1</sup> using HP Device Bridge 2.0.<sup>2</sup>



## Conference with confidence

Look and sound your best effortlessly with a Poly Studio 5MP pop-up tiltable webcam and AI Noise Reduction—all on an ultra-wide display with Auto Lock and Awake to keep your business your own. Simply pop down the webcam after your call for on-demand privacy.



## Work across two PCs seamlessly

Wake up your workspace with frictionless connectivity. Seamlessly work between two computers and manage all of your accessories, while a single USB-C® cable charges and delivers up to 140W of power.<sup>3</sup>

## Sustainability in action

### Materials that make an impact

This energy-efficient monitor is thoughtfully designed with at least 90% recycled plastic content in the monitor's enclosure, 20% recycled glass in the monitor panel, and 90% recycled aluminum in the stand.<sup>4</sup> Plus, 100% of the paper-based packaging is sustainably sourced or recycled.<sup>5</sup>



# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm



## Featuring

### Sharp & Privacy Ready 5MP Webcam

Make a stellar impression with integrated Poly Studio 5MP pop-up tiltable webcam and ensure on-demand privacy with proximity sensors for Auto Lock and Awake.

### DNN AI Noise Reduction and Integrated Speaker Performance

Upgrade your conferencing and eliminate distractions with HP AI-based noise reduction filters, achieving balanced sound with dual 3W woofers and 5W tweeters.

### AI-Enhanced Video Calls

Collaborate confidently with AI-powered conferencing available on HP AI PCs—seamlessly enhanced through Poly Camera Pro for a smarter, sharper meeting experience.<sup>6,15</sup>

### Meetings Made Effortless

Seamlessly collaborate with a Zoom Certified and Microsoft Teams compatible monitor. Access conferencing controls quickly with control buttons on the display.

### Immersive Resolution and Aspect Ratio

Dive into crisp visuals with expansive screen space and high pixel density of Dual QHD resolution and 32:9 aspect ratio, making multi-screen workflows seamless.

### Massive View with 1800R Curved Monitor

Experience improved focus across a wider view with a 1800R curved monitor, achieving greater immersion while reducing eye strain and unwanted distractions.

### More Vibrant Color, Contrast and Brightness

Get a clear, true-to-life view of your work with rich, vibrant 99% sRGB color, 4000:1 contrast ratio, and 400 nits brightness to share in any light.<sup>7</sup>

### 165 Hz Refresh Rate

165 Hz refresh rate practically removes all artifacting and motion blurring for action that looks crisp and content that is incredibly responsive.<sup>7</sup>

### USB-C Power Delivery

Simply connect your entire setup via one USB-C® cable and charge one computer up to 140W.<sup>3</sup>

### Disconnected Firmware Updates

ITDMs can now send disconnected firmware updates through HP CMSL, ensuring the process won't interrupt their fleet's workflow, leading to a smoother and more reliable update experience.<sup>8</sup>

### Customize your Screen Space with Virtual Multiple Display

Partition your massive 49" display with Virtual Multiple Display, creating up to three virtual unique workspaces that act like three distinct displays for toggle-free multitasking.<sup>1</sup>

### HP Device Bridge 2.0

Simplify multitasking with controlled file sharing. HP Device Bridge 2.0 lets you control two devices: copy/paste files, and switch views seamlessly with one keyboard and mouse. No need to press a "hot key".<sup>2</sup>

### Smart KVM, PbP and PIP

Prioritize control with Smart KVM, detecting and switching between two computers viewed side-by-side on screen with picture-by-picture or picture-in-picture.<sup>9</sup>

### Single Power On

Instantly turn on your display and PC with Single Power On, even when the lid is closed, by pressing the power button on the bottom of the display.<sup>10</sup>

### More Ports. More Power.

More ports means more capabilities. With HDMI 2.1, DisplayPort™ 1.4 In, two USB-C®, USB-C® 3.2 (downstream), RJ-45, 3.5 audio jack and 3 USB-A 3.2 ports you can connect multiple devices.<sup>11</sup>

### Ambient Light Sensor

Keep your eyes comfortable, day or night, with an ambient light sensor that automatically adjusts screen brightness to the lighting of your environment.

### Improved Visual Comfort

Protect your eyes with a monitor that meets the TUV Rheinland Eye Comfort 3.0 - 3 star criteria with HP Eye Ease low blue light filter, wide color coverage and flicker free.<sup>7,12</sup>

### HP Display Center

Customize your monitor with the intuitive HP Display Center that lets you tailor your settings, partition screens, and more—all through the host PC.<sup>13</sup>

### Remote Management Reimagined

The powerful HP Client Management Script Library (CMSL) works seamlessly with Intune/SCCM to make managing your fleet remotely easy using PowerShell.<sup>8</sup>

### Increased Energy Efficiency

To help protect our shared future, this monitor is held to the highest energy saving standard with an ENERGY STAR rating and EPEAT® Gold Registration.<sup>14</sup>

### Works on Mac® or PC

Verified with devices running across OS, this monitor works with Mac® or PC devices.<sup>15</sup>



# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm

## Specifications

### Display specifications

|                               |   |
|-------------------------------|---|
| Display size                  | 124.5 cm (49")  |
| Viewable diagonal size        | 49" (124.5 cm)  |
| Aspect ratio                  | 32:9 <sup>1</sup>   |
| Curvature                     | 1800R   |
| Native resolution             | DQHD (5120 x 1440) <sup>12</sup>  |
| Resolution (maximum)          | DQHD (5120 x 1440 @ 165Hz) <sup>1</sup>   |
| Resolutions supported         | 640 x 480 @ 60 Hz; 640 x 480 @ 75 Hz; 720 x 400 @ 70 Hz; 800 x 600 @ 60 Hz; 1024 x 768 @ 60 Hz; 1280 x 720 @ 60 Hz; 1280 x 1024 @ 60 Hz; 1600 x 900 @ 60 Hz; 1680 x 1050 @ 60 Hz; 1920 x 1080 @ 60 Hz; 1920 x 1080 @ 100 Hz; 2560 x 1440 @ 60 Hz; 3440 x 1440 @ 60 Hz; 3440 x 1440 @ 75Hz; 3440 x 1440 @ 100 Hz; 1024 x 768 @ 75 Hz; 1280 x 800 @ 60 Hz; 1920 x 1080 @ 75 Hz; 840 x 1440 @ 60 Hz; 1680 x 1440 @ 60 Hz; 1760 x 1440 @ 50 Hz; 1760 x 1440 @ 60 Hz; 2560 x 1440 @ 50 Hz; 5120 x 1440 @ 60 Hz; 5120 x 1440 @ 75 Hz; 5120 x 1440 @ 100 Hz; 5120 x 1440 @ 120 Hz; 5120 x 1440 @ 145 Hz; 5120 x 1440 @ 165 Hz; 1680 x 1440 @ 50 Hz; 5120 x 1440 @ 144 Hz |
| Panel type                    | VA; LCD   |
| Bezel                         | 3-sided borderless  |
| Panel active area             | 119.19 x 33.52 cm   |
| Panel bit depth               | True 8 bit <sup>1</sup>   |
| Display colors                | Up to 16.7 million colors supported <sup>1</sup>  |
| Display color gamut           | 99% sRGB <sup>1</sup>   |
| Refresh rate (maximum)        | 165 Hz <sup>1</sup>   |
| Display scan frequency        | 50-165 Hz (Vertical) <sup>1</sup> ; 25-258 kHz (Horizontal) <sup>1</sup>  |
| Response time                 | 5ms GtG (with overdrive) <sup>1</sup>   |
| Brightness                    | 400 nits <sup>1</sup>   |
| Contrast ratio                | 4000:1 (Static) <sup>1</sup> 5,000,000:1 (Dynamic) <sup>1</sup>   |
| Pixel pitch                   | 0.2328 x 0.2328 mm <sup>1</sup>   |
| Pixels per Inch (ppi)         | 109 ppi   |
| Viewing angle                 | 178° (Vertical) 178° (Horizontal)   |
| Backlight type                | Edge-lit  |
| Backlight lamp life           | 30,000 hours  |
| Display User Control Options  | Color; Image; Input; Power; Menu; Management; Information; Exit; Audio  |
| Management software           | HP Display Center; HP Client Management Script Library  |
| Remote manageability          | In-Band MAC Address Pass Through (MAPT); Out-of-Band MAC Address Pass Through (MAPT); In-Band Wake on LAN (WoL); Out-of-Band Wake on LAN (WoL); PXE Boot; Through HP Client Management Script Library   |
| User updateable firmware      | Yes   |
| Low blue light modes          | HP Eye Ease (TÜV Low Blue Light Hardware Solution certified) <sup>1</sup>   |
| Flicker-free                  | Yes (TÜV certified)   |
| Screen treatment              | Anti-glare  |
| Hardness                      | 3H <sup>1</sup>   |
| Haze                          | 25%   |
| VESA mount                    | 100 x 100 mm  |
| Adjustability                 | Height adjustment range: 150 mm<br>Tilt: -5 to +20°<br>Swivel: ±30°   |
| Camera                        | 5 MP camera   |
| Camera features               | Independent tilt -20° to 5°; Windows Hello support (IR Sensor); Pop-up privacy  |
| Max video resolution          | 2592 x 1944 at 30 fps   |
| Diagonal field of view (dFoV) | 80° (Optical)   |
| Microphone                    | Dual microphones with DNN noise cancellation  |
| Speaker output power          | 2 x 3 W (Woofer); 2 x 5 W (Tweeter); Built in, down-firing speakers   |
| Languages                     | 11 (English, Spanish, German, French, Italian, Dutch-Netherlands, Portuguese, Japanese, T-Chinese, S-Chinese and Russian)   |
| Special features              | Ambient light sensor; Presence detection sensor; Disconnected Firmware updates; Conferencing control buttons  |
| Productivity                  | Device Bridge 2.0; KVM switch; Picture-by-Picture; Picture-in-Picture; Single Power ON; Smart KVM; Auto Lock and Awake; Virtual multiple display  |

### Connectivity and communications

|                     |  |
|---------------------|--|
| Port and connectors | 1 HDMI 2.1<br>1 DisplayPort™ 1.4<br>1 x 3.5 mm Audio Jack (Audio In/Out Combo)<br>1 USB Type-C® 5Gbps signaling rate (Up to 15W USB Power Delivery)<br>2 USB Type-C® 5Gbps signaling rate (Up to 140W USB Power Delivery, Alt Mode DisplayPort™ 1.4)<br>3 USB Type-A 5Gbps signaling rate (3 charging)<br>1 RJ-45 (10/100/1000 Mbps) |
| HDCP                | Yes, DisplayPort™, HDMI and USB Type-C®  |
| Power supply        | 100 - 240 VAC 50/60 Hz (Internal)  |
| Power consumption   | 375 W (maximum); 65 W (typical) <sup>13</sup>  |



# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm

## Specifications

### Appearance

|                                      |   |
|--------------------------------------|---|
| Stand color                          | Black; Silver                                   |
| Detachable stand                     | Yes   |
| Physical security                    | Standard lock slot <sup>4</sup>                 |
| Base area footprint                  | 27.5 x 26.5 cm                                  |
| Dimensions without Stand (W x D x H) | 119.35 x 30.91 x 37.1 cm (without stand)        |
| Dimensions with stand (W x D x H)    | 119.35 x 30.91 x 58.73 cm                       |
| Weight                               | 13.74 kg (without stand); 17.18 kg (with stand) |
| Packaged Dimensions (W x D x H)      |   |
| Packaged weight                      | 26.66 kg  |

### Certification and compliance

|  |  |   |
|--|--|---|
| Energy efficiency class                              | G  | A  |
| On mode power demand in Standard Dynamic Range (SDR) | 45 W <sup>14</sup>   |   |
| Standby mode power demand                            | 0.5 W <sup>14</sup>  |   |
| Energy efficiency                                    | ENERGY STAR® certified   |   |
| Ecolabels  | CECP; SEPA; Taiwan Green Mark; Japan PC Green Label; TCO Certified; TCO Certified Edge; EPEAT® Gold with Climate+; CEL Grade 2; Ukraine EE; Belarus EE; Korea MEPS; California CEC <sup>7</sup>  |   |
| Sustainable impact specifications                    | Low halogen; 90% post-consumer recycled plastic; Contains ocean-bound plastic; Contains 20% recycled glass in the monitor panel; At least 20% recycled metal including 90% recycled aluminum in the stand; Molded paper pulp cushion inside box is 100% sustainably sourced or recyclable; Outside box and corrugated cushions are 100% sustainably sourced and recyclable <sup>8,9,10,11,12</sup> |   |
| Certifications                                       | BIS; BSMI; CB; CCC; CE; CECP; CEL; cTUVus; EAC; FCC; ICES; ISO 9241-307; KC; KCC; NOM; PSB; RCM; TUV-S; VCCI; WW application; UAE; TUV-GS; ErP LOT5; TÜV Flicker free certified; NRCS; PSE; TÜV Low Blue Light Hardware Solution certified; Australian-New Zealand DoC; EMF  |   |
| Microsoft WHQL certification                         | Windows 11; Windows 10 <sup>16</sup>   |   |
| Certified collaboration software                     | Zoom   |   |
| Environmental  | Operating temperature range: 5 to 35°C   |   |
|  | Non-operating temperature range -40 to 65°C  |   |
|  | Operating humidity: 20 to 80% RH (non-condensing)  |   |
|  | Non-operating humidity: 5 - 95%  |   |
|  | Operating altitude: Up to 5,000 m  |   |
|  | Non-operating altitude: Up to 12,192 m   |   |

### Additional information

|                       |  |
|-----------------------|--|
| Manufacturer Warranty | HP three-year limited warranty <sup>15</sup>   |
| What's in the box     | Monitor; Warranty card; Quick Setup Poster; AC power cord; 2 USB Type-C® to Type-C® cable; VESA mount adapter <sup>3</sup> |
| Country of origin     | Made in China  |

### Logistic information

|                               |   |
|-------------------------------|---|
| Pallet Dimensions (L x W x H) | Pallet: 136 x 94 x 199.9 cm (20 ft, 40 ft)<br>136 x 94 x 246.5 cm (40 HQ) |
| Pallet weight                 | Pallet: 364.5 kg (20 ft, 40 ft)<br>453.7 kg (40 HQ)                       |
| Pallet (layers)               | 4 (20 ft, 40 ft); 5 (40 HQ)   |
| Products per layer            | 3   |
| Products per pallet           | 12 (20 ft, 40 ft); 15 (40 HQ)   |




# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm

## Product walkaround



|   |   |
|---|---|
| 1. Speaker mute<br>2. Volume down<br>3. Volume up<br>4. Microphone mute | 5. USB Type-C® 5Gbps signaling rate (Up to 15W USB Power Delivery)<br>6. 3.5 mm audio jack (audio in/out combo)<br>7. USB Type-A 5Gbps signaling rate (charging)<br>8. Power button |
|---|---|

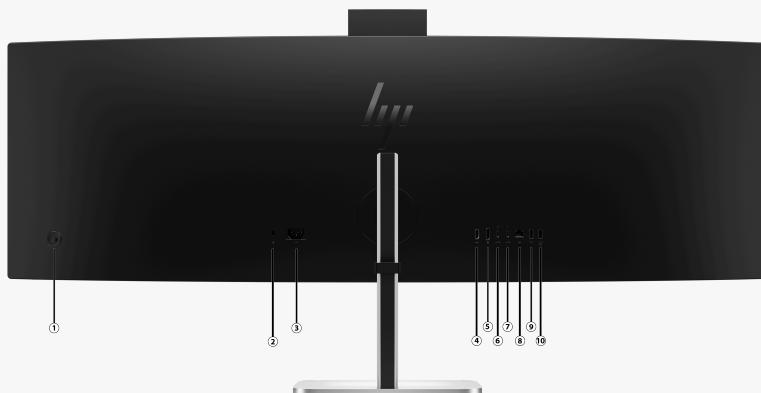

|   |  |
|---|--|
| 1. Joypad OSD button<br>2. Security cable slot<br>3. Power connector<br>4. HDMI 2.1<br>5. DisplayPort™ 1.4<br>6. USB Type-C® (up to 140W USB Power Delivery, Alt mode DisplayPort™ 1.4) | 7. USB Type-C® (up to 140W USB Power Delivery, Alt mode DisplayPort™ 1.4)<br>8. RJ-45 (10/100/1000 Mbps)<br>9. USB Type-A 5Gbps signaling rate (charging)<br>10. USB Type-A 5Gbps signaling rate (charging) with KVM |
|---|--|

# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm

## Accessories and services (not included)

### HP Business PC Security Lock v3 Kit



Help prevent chassis tampering and secure your PC and display in workspaces and public areas with the affordable HP Business PC Security Lock v3 Kit.  
**Product number:** 3XJ17AA

### HP Quick Release Bracket 2



Use the HP Quick Release Bracket 2 to attach your HP Desktop Mini to an HP display<sup>1</sup> and a variety of stands, arms or wall mounts.<sup>2</sup> The failsafe "Sure-Lock" mechanism snaps the PC securely in place, and can be further secured with a theft-deterrent security screw.  
**Product number:** 6KD15AA

### HP B560 PC Mounting Bracket



Create a compact workspace with the HP B560 PC Mounting Bracket. Attach your HP Desktop Mini PC<sup>1</sup> behind select E-Series G5<sup>2</sup>, Series 5 Pro<sup>3</sup>, or Series 7 Pro<sup>4</sup> monitors for a fully adjustable, space-saving solution.

**Product number:** 763U8AA

<sup>1</sup> Compatible with Desktop Mini PCs and Workstations that have a 100 mm x 100 mm VESA mount. Use included spacer kit to allow compatibility with HP Thin Clients that have a 100 mm x 100 mm VESA mount.

<sup>2</sup> Compatible with the following E-Series monitors: E22 G5, E24 G5, E24t G5, E24q G5, E27 G5, E27q G5, E24u G5, E27u G5, E27k G5, and E32k G5, E45c G5.

# HP Series 5 Pro 49 inch DQHD Conferencing Monitor - 549pm

## Footnotes

### Messaging Footnotes

<sup>1</sup> Available through HP Display Center - Virtual Multiple Displays. HP Display Center is available for download on the Microsoft store for Windows or support.hp.com for Windows and MacOS. Host PC requires USB-C® (Alt Mode DisplayPort™) connection to enable Virtual Multiple Display and Windows 10 or higher.

<sup>2</sup> HP Device Bridge 2.0 works with two computers and is compatible with Windows 10 and higher, MacOS M1 platforms, and up to Ubuntu 18.04 devices.

<sup>3</sup> When two sources are connected, first device gets up to 90W and second one up to 65W.

<sup>4</sup> Recycled plastic is expressed as a percentage of the total weight plastic. Post-consumer recycled is based on the definition set in the EPEAT® standard for computers, IEEE 1680.1-2018 standard. Percentage of recycled glass in the monitor panel varies by product. Recycled glass is expressed as a percentage of the total weight of the glass. Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams.

<sup>5</sup> HP paper and fiber based packaging for PCs, displays, home and office print, and supplies is reported by suppliers as recycled or certified, with a minimum of 97% by volume verified by HP. Packaging is the box that comes with the product and all paper-based materials inside the box. Packaging for personal systems accessories and spare parts is not included.

<sup>6</sup> Poly Camera Pro App features only available on the HP AI PC: AI features include: Auto Frame, Background Blur, Magic Background, Multi-Camera, Streaming, Spotlight, Filters. Sold separately.

<sup>7</sup> All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary, either higher or lower.

<sup>8</sup> HP CMSL is only supported on 64-bit PowerShell 5.1 and higher. CMSL supports Windows 10 version 1809 and higher, and Windows 11. Some limitations may apply to legacy displays. Visit support.hp.com to download HP CMSL.

<sup>9</sup> For KVM compatibility, if connected PCs do not have USB-C® port, user will need a USB-C® to A cable.

<sup>10</sup> Single Power On only compatible with HP PCs with Windows 10 or higher.

<sup>11</sup> AC power cable and 2 x USB-3.2 C-C cables included.

<sup>12</sup> TUV Rheinland® 3-star eye comfort certification.

<sup>13</sup> Host PC requires Windows 10 or higher. HP Display Center is available for download on the Microsoft store for Windows or support.hp.com for Windows and MacOS.

<sup>14</sup> Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit www.epeat.net for more information. EPEAT® is a world class ecolabel for electronics and technology products. EPEAT® Gold with Climate+ registered products have met rigorous criteria and been independently verified to assure they have been thoughtfully designed with the planet in mind. With EPEAT Climate+, you're not just choosing products; you're choosing a movement towards corporate responsibility and climate action. This product has been verified to meet ENERGY STAR® requirements.

<sup>15</sup> Poly Camera Pro requires Windows OS. AI applications that require an NPU may require the purchase of software, a software subscription, or enablement by a software or platform provider. Additionally, third-party software may have specific configuration or compatibility requirements. Performance varies depending on usage, configuration, and other factors.

<sup>16</sup> Based on internal testing of HP Series 7 Pro and HP Series 5 Pro monitors with USB Type-C® or HDMI connections to devices on macOS and Windows, March 2024 and September 2024. Requires USB Type-C® or HDMI connectivity. Some features may not be supported.

### Technical Specifications Footnotes

<sup>1</sup> All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary, either higher or lower.

<sup>2</sup> DisplayPort™ 1.4 or HDMI 2.0 required to drive panel at its native resolution. The video card of the connected PC must be capable of supporting 2560 x 1440 at 60 Hz with 8 bit color using one DisplayPort™, HDMI. The video card of the connected PC must be capable of supporting 2560 x 1440 and include one DisplayPort™ or one HDMI outputs to drive the monitor at the Preferred Mode.

<sup>3</sup> Included cables may vary by country.

<sup>4</sup> Lock sold separately.

<sup>5</sup> Host PC requires Windows 10 or higher. HP Display Center is available for download on the Microsoft store for Windows or support.hp.com for Windows and MacOS.

<sup>6</sup> The Client Management Script Library must be downloaded to the connected PC to run CMSL commands. Some limitations may apply to legacy displays. Visit hp.com to download HP CMSL.

<sup>7</sup> EPEAT® registered where applicable. EPEAT® registration varies by country. See www.epeat.net for registration status by country. Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. Status varies by country. Visit www.epeat.net for more information.

<sup>8</sup> External power supplies, WWAN modules, power cords, cables and peripherals excluded. Service parts obtained after purchase may not be Low Halogen.

<sup>9</sup> Recycled plastic is expressed as a percentage of the total weight plastic. Post-consumer recycled is based on the definition set in the EPEAT® standard for imaging equipment, IEEE 1680.2.

<sup>10</sup> Percentage of recycled glass in the monitor panel varies by product. Recycled glass is expressed as a percentage of the total weight of the glass.

<sup>11</sup> Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams.

<sup>12</sup> 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers.

<sup>13</sup> Maximum brightness and contrast setting with maximum power loading on USB downstream ports (for power consumption maximum); Factory default brightness and contrast setting with 25% power loading on USB downstream ports (for power consumption typical).

<sup>14</sup> As defined in EU 2019/2021 and EU 2019/2013.

<sup>15</sup> Please refer to the warranty card supplied with the product for details. Warranty may vary by country as required by law. Go to hp.com/support to learn about HP award winning service and support options in your region.

<sup>16</sup> Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows is automatically updated and enabled. High speed internet and Microsoft account required. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

