


# Delock PCI Express x4 Card > 1 x internal NVMe M.2 Key M 110 mm - Low Profile Form Factor

## Description

The Delock PCI Express card expands a PC by one M.2 slot. A M.2 SSD in format 22110, 2280, 2260, 2242 and 2230 can be connected.

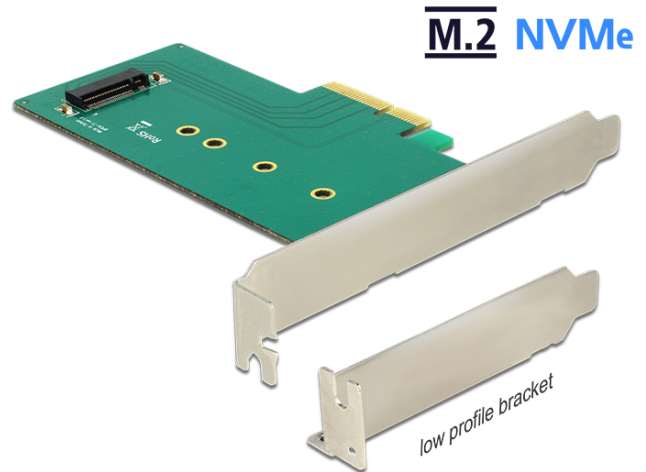

## Specification

- Connector: internal:
  - 1 x 67 pin M.2 key M slot
  - 1 x PCI Express x4, V3.0
- Interface: PCIe
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 39 Gbps
- Supports NVM Express (NVMe)

## System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

## Package content

- PCI Express card
- Low profile bracket
- 1 x fixing screw
- User manual

Item no. 89472




EAN: 4043619894727

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



| General   |   |
|---|---|
| Form factor:                                    | Low Profile   |
| Supported operating system:                     | Linux Kernel 3.19<br>Windows 7 32-bit<br>Windows 7 64-bit<br>Windows 8 32-bit<br>Windows 8 64-bit<br>Windows 8.1 32-bit<br>Windows 8.1 64-bit<br>Windows 10 32-bit<br>Windows 10 64-bit |
| Slot:   | PCIe  |
| Supported module:                               | M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe  |
| Maximum height of the components on the module: | 1.5 mm application of double-sided assembled modules supported  |
| Interface                                       |   |
| Internal:                                       | 1 x 67 Pin M.2 NGFF key M slot<br>1 x PCI Express x4, V3.0  |
| Technical characteristics                       |   |
| Data transfer rate:                             | up to 39 Gbps   |