


CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0			

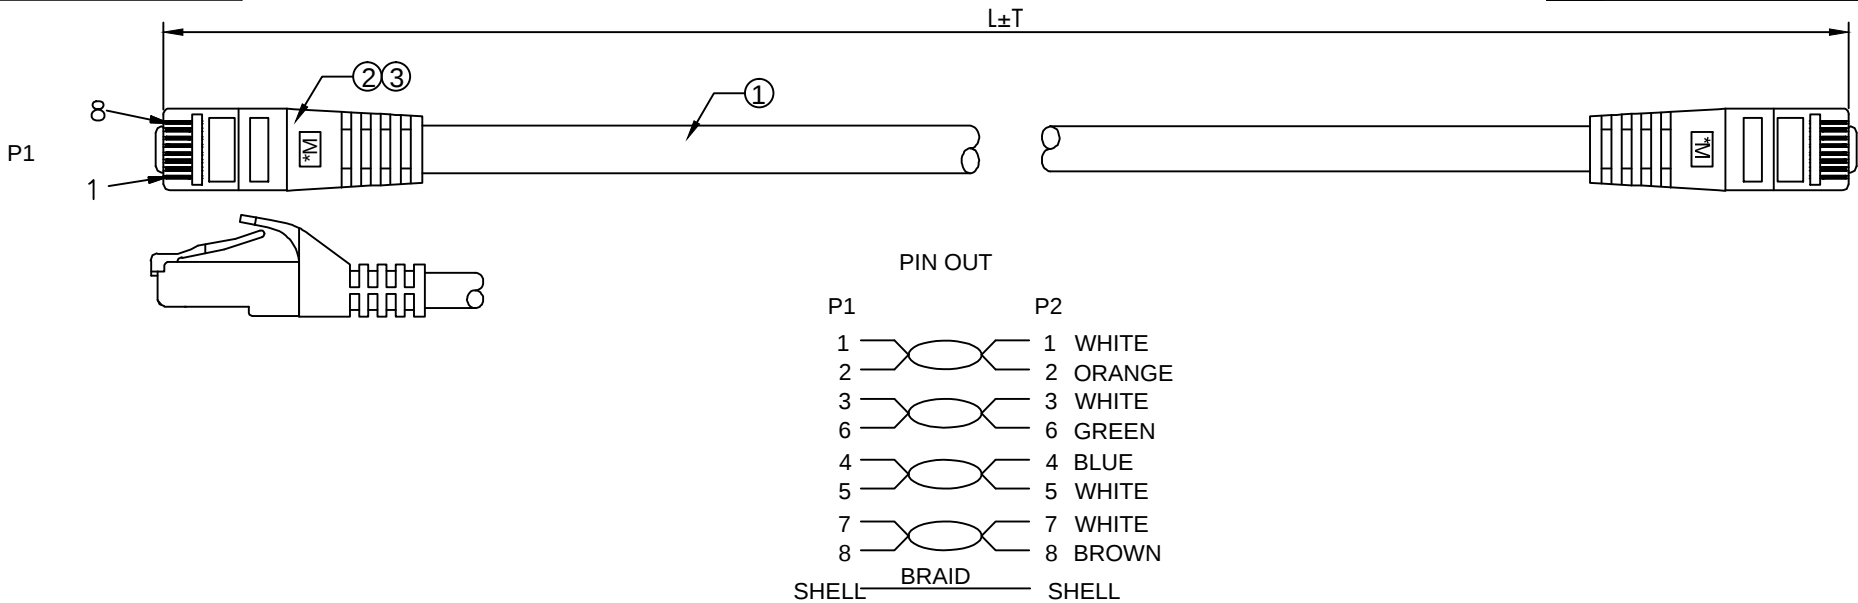

NOTE:
1.ELECTRONIC TEST
1.1 OPEN/SHORT 100% TEST
2.PRINTING:InLine CAT.6 S/FTP 4×2×AWG27/7 PIMF ISO/IEC 11801 & EN 50173 VERIFIED TIA/EIA 568 B.2-1 HALOGEN
FREE **GIGABIT**
3.STORAGE TEMPERATURE RANGE:-20~70℃
OPERATING TEMPERATURE:-10~60℃
4.Packing:L≤5m,1pc/inline bag+label1,10pcs/pe bag+label2
5<L≤15m,1pc/inline bag+label1,5pcs/pe bag+label2
15<L≤50m,1pc/inline bag+label1,wihout pe bag
ROHS 3 support (EU 2015/863) Compliant

③	OUTER MOLD	PVC/ SAME COLOUR AS THE JACKET	2	
②	PLUG	SHIELDED RJ45 8P8C,GOLD PLATED PIN 3U', NICKEL PLATED SHELL,TRANSPARENT RED	2	
①	CABLE	(27AWG 7/0.135BC*1P+AL-FOIL)*4+BRAID(0.12/5/16)AL-MG, JACKET:LSZH,OD6.2±0.2MM	1	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

FERGUS			2022/09/14
DRAWN BY	CHECKED BY	APPROVED BY	DATE
INTOS ELECTRONIC AG			
PRODUCT TITLE:		ITEM NO.	SEE THE CHART
CAT.6 S/FTP patch cord ,LSZH			
CUSTOMER:		PROJECTION	
		SCALE:NONE	UNITS:mm SHEET:1/2

CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0			

COLOUR:GRAY/PANTONE 422C	
ITEM NO	LENGTH
76922	250±15
76933	300±15
76950	500±20
76911	1000±30
76912	1500±30
76902	2000±40
76904	2500±40
76903	3000±50
76905	5000±70
76907	7500±100
76900	10000±100
76913	12500±125
76915	15000±150
76915	17500±175
76920	20000±200
76925	25000±200
76930	30000±300
76940	40000±400
76955	50000±500


COLOUR:BLUE/PANTONE 285C	
ITEM NO	LENGTH
76922G	250±15
76933G	300±15
76950G	500±20
76911G	1000±30
76912G	1500±30
76902G	2000±40
	2500±40
76903G	3000±50
76905G	5000±70
76907G	7500±100
76900G	10000±100
	12500±125
76915G	15000±150
	17500±175
	20000±200
	25000±200
	30000±300
	40000±400
	50000±500

COLOUR:RED/PANTONE 1795C	
ITEM NO	LENGTH
76922R	250±15
76933R	300±15
76950R	500±20
76911R	1000±30
76912R	1500±30
76902R	2000±40
	2500±40
76903R	3000±50
76905R	5000±70
76907R	7500±100
76900R	10000±100
	12500±125
76915R	15000±150
	17500±175
	20000±200
	25000±200
	30000±300
	40000±400
	50000±500

COLOUR:BLACK	
ITEM NO	LENGTH
76922S	250±15
76933S	300±15
76950S	500±20
76911S	1000±30
76912S	1500±30
76902S	2000±40
	2500±40
76903S	3000±50
76905S	5000±70
76907S	7500±100
76900S	10000±100
	12500±125
76915S	15000±150
	17500±175
	20000±200
	25000±200
	30000±300
	40000±400
	50000±500

COLOUR:WHITE	
ITEM NO	LENGTH
76922W	250±15
76933W	300±15
76950W	500±20
76911W	1000±30
76912W	1500±30
76902W	2000±40
	2500±40
76903W	3000±50
76905W	5000±70
76907W	7500±100
76900W	10000±100
	12500±125
76915W	15000±150
	17500±175
	20000±200
	25000±200
	30000±300
	40000±400
	50000±500

COLOUR:YELLOW/PANTONE 122C	
ITEM NO	LENGTH
76922Y	250±15
76933Y	300±15
76950Y	500±20
76911Y	1000±30
76912Y	1500±30
76902Y	2000±40
	2500±40
76903Y	3000±50
76905Y	5000±70
76907Y	7500±100
76900Y	10000±100
	12500±125
76915Y	15000±150
	17500±175
	20000±200
	25000±200
	30000±300
	40000±400
	50000±500

FERGUS			2022/09/14
DRAWN BY	CHECKED BY	APPROVED BY	DATE
INTOS ELECTRONIC AG			
PRODUCT TITLE:		ITEM NO.	
CAT.6 S/FTP patch cord ,LSZH			
CUSTOMER:		PROJECTION	
		SCALE:NONE	UNITS:mm SHEET:2/2