


ASUS BE279QSK

Video Conferencing Monitor



Key Features

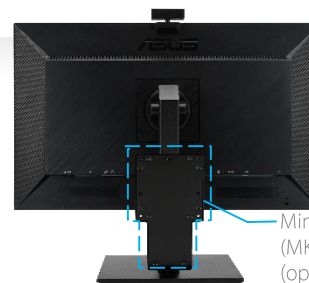

Optimized for the finest image and color quality with 178° wide-viewing-angle



Webcam with Mic Array

Built in adjustable 2MP 1080p webcam, mic array plus stereo speakers deliver better online communication



DisplayPort

Extensive connectivity with DisplayPort, HDMI, D-sub, Audio in, Earphone jack




4-way Ergonomic Stand

Ergonomically-designed stand with tilt, swivel (+180° ~ -180°), pivot, and height adjustments



Wall Mountable

Space saving from compatible VESA mount standard (100 x 100 mm) and bundled ASUS miniPC kit(optional)



Frameless Design

Frameless panel design for an ideal multi display setup



Flicker-free

ASUS Flicker-Free Technology clears out the distracting flicker, and brings viewing comfort.



Ultra-low Blue Light

Four levels of Blue Light Filter help users effectively reduce harmful blue light from the screen by tasks.



Complied with ENERGY STAR® for environmental protection & money saving

Specification



Display	Panel Size(diagonal)	27"(68,58 cm) Wide Screen (16:9)
	Display Viewing Area(HxV)	597.89 x 336.31 mm
	Panel Type	IPS
	Display Surface	non-glare
	Color Saturation	72% NTSC
	True Resolution	1920 x 1080
	Pixel Pitch	0.311 mm
	Brightness (Max.)	250 cd/m ²
	Contrast Ratio (Max.)	1000:1
	ASUS Smart Contrast Ratio(ASCR)	100,000,000:1
	Viewing Angle (CR \geq 10)	178°(H)/178°(V)
	Display Colors	16.7 million
	Response Time	5ms (GTG)
Video Features	Splendid™ Video Intelligence Tech.	Yes
	Skin-Tone Selection	3 modes
	Color Temperature Selection	4 modes (Cool/Normal/Warm/User)
	HDCP support	Yes (ver. 1.4)
	QuickFit	Yes
	Blue Light Filter	Yes
Webcam (built-in)		Yes (2M 1080p; Swivel +180° ~ -135°, Tilt +10° ~ -10°)
Audio Features		Built-in Microphone(Array type) Stereo Speaker 2W x 2 stereo, RMS
Input/ Output		HDMI(v1.4), DisplayPort1.2, D-Sub, Audio-in, Earphone jack, USB port(upstream for webcam)
Signal Frequency	Analog Signal Frequency	30~83 KHz(H) / 50~61 Hz(V)
	Digital Signal Frequency	30~83 KHz(H) / 50~61 Hz(V)
Power	Power Consumption	<30 W ^{*1}
	Power Saving Mode	<0.5W
	Power Off Mode	0W(hard switch)
	Voltage	100–240V, 50 / 60 Hz
Mechanical Design	Color	Black
	Tilt(angle)	Yes (+35° ~ -5°)
	Swivel(angle)	Yes (+180° ~ -180°)
	Pivot(angle/direction)	Yes (+90° ~ -90°)
	Height Adjustment	Yes (0~150mm)
VESA Wall Mounting		100x100mm
Security	Kensington lock	Yes
Dimension	Phys. Dimension (WxHxD)	611 x (398~548) x 266 mm (with stand+webcam), 611 x 396 x 56 mm (without stand)
	Box Dimension (WxHxD)	712x 468 x 228 mm
Weight		6.8 Kg(Net); 4.8 kg(Net weight without stand) 9.3 Kg (Gross)
Accessories		Power cord(1.8m), DP Cable(1.8m, optional), HDMI cable(1.8m, optional), Audio cable(1.8m, optional), USB cable(1.8m, upstream for webcam), Warranty card, Quick Start Guide, mini PC kit(optional)
Compliance Standards		Energy Star®, UL/cUL, CB, CE, ErP, EU Energy label, FCC, ICES-3, CCC, CEL, ISO9241-307, BSMI, CU, C-Tick, MEPS, VCCI, PSE, J-MOSS, KC, KCC, e-Standby, RoHS, Windows 7 & 10 WHQL, EPEAT Bronze(by country), TCO 8.0, TUV Flicker Free, TUV Low Blue Light, WEEE

*1.Measuring a screen brightness of 200 nits without audio/ USB/ Card reader connection


*.All specifications are subject to change without notice.

Outline Dimension



Tilt: -5°~35°

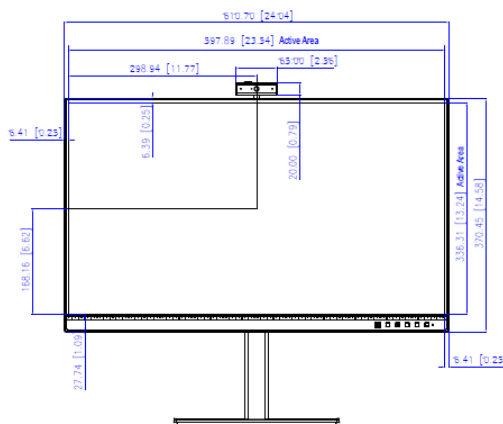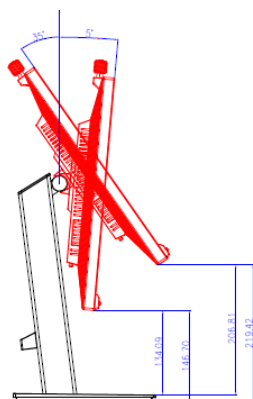




Webcam/Tilt: -10°~10°

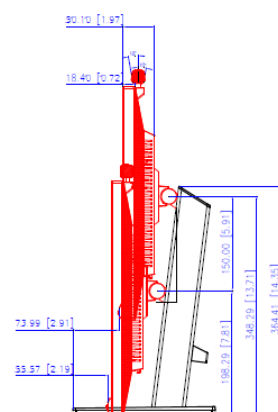

Webcam/Swivel:
Clockwise 180°
Counterclockwise 135°



Swivel: +/-180°

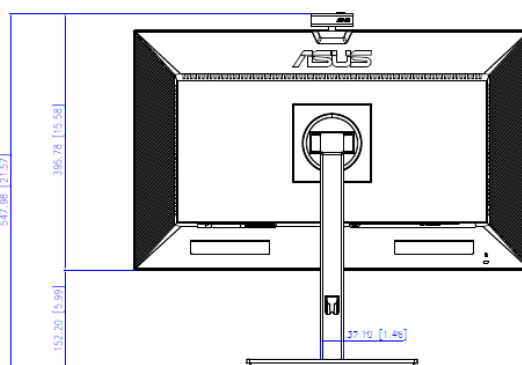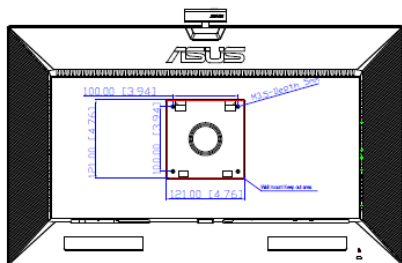

*Unit: mm(inch)