Rittal - The System.

Faster – better – everywhere.

Earth rail, vertical for VX, VX IT, TS, TS IT – DK 7548.000


Date: Jun 29, 202



ENCLOSURES >> POWER DISTRIBUTION >> CLIMATE CONTROL >> IT INFRASTRUCTURE >> SOFTWARE & SERVICES >>

Earth rail, vertical for VX, VX IT, TS, TS IT – DK 7548.000

created: 29.06.2021 on www.rittal.com/com-en

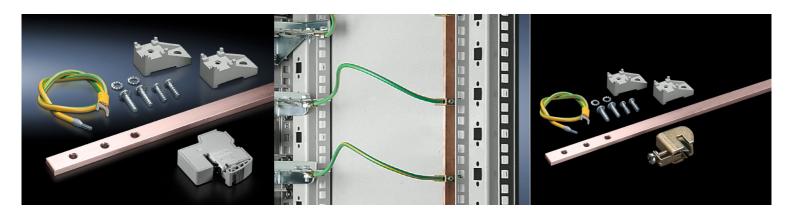

Product description

Description: Easily fitted to the 25 mm DIN pitch pattern of distributors or to the 482.6 mm (19")

mounting angles. The supplied earth conductors facilitate star earthing of the cable clamp straps in the patch panels. The earth terminals are fully adjustable. Current

carrying capacity of rail approx. 200 A.

Supply includes: Earth rail made from E-Cu 57 to DIN EN 12 163, DIN EN 13 601, 15 x 5 mm

16 push-in conductor connection clamps 1.5 – 16 mm²

15 earthing leads 6 mm², L = 500 mm

Assembly parts

Product description

To fit: Enclosure type: VX

Enclosure type: VXIT Enclosure type: TS Height: 2200 mm

Dimensions: Length: 1945 mm

Packs of: 1 pc(s).

Weight/pack: 2.91 kg

Copper weight (kg per piece):

U

EAN: 4028177131934

Customs tariff number:

74199990

© Rittal 2021

ETIM 7.0:	EC000329
ETIM 6.0:	EC000329
eCl@ss 8.0/8.1:	27400605
e CI@ss 6.0/6.1:	27149205
Product description:	DK Earth rail, vertical, L: 1945 mm, For H: 2200 mm, For TS
Approvals	
Certificates:	EAC

© Rittal 2021 2