


DATASHEET

Extension Cable C20 180° - C19 180°, Black, 1.0 m, 3 x 1.50 mm², IEC Lock

IEC LOCK

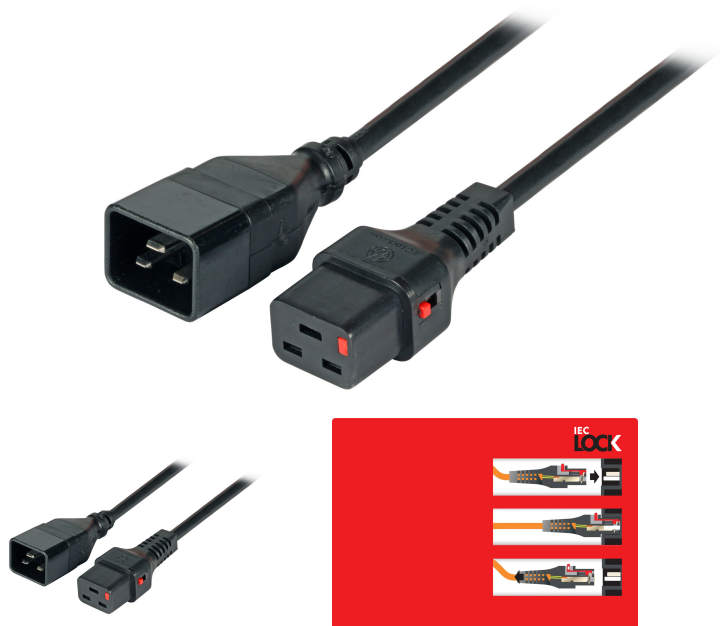

General data

With „IEC Lock“: prevents accidentally removing of the C19 jack from devices

After connecting, the C13 jack only can be released after sliding back the red latch

16 A / 250 V VDE geprüft

Allgemeine Daten

Number of cores	3
Colour outer sheath	black
Spiralized cable	False
With cord switch	False
Material outer sheath	Polyvinyl chloride (PVC)
Halogen free	False

Mechanische Eigenschaften

Connection 1	Cold device plug (IEC 60320)
Connection 2	Cold device plug straight, female

This datasheet was created automatically on 11-05-2023 . Technical changes reserved.



DATASHEET

Extension Cable C20 180° - C19 180°, Black, 1.0 m, 3 x 1.50 mm², IEC Lock

Kabelmantel

Temperature resistance	0 - 70 °C
Oil resistant (according to EN 60811-404)	False

Elektrische Eigenschaften

Protective conductor	True
Nominal voltage	250 V

Normen, Zulassungen, Zertifizierungen

Oil resistant (acc. EN 60811-2-1)	False
-----------------------------------	-------

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length Leiternennquerschnitt Außendurchmesser ca.			
EK607SW.1	Extension Cable C20 180° - C19 180°, Black, 1.0 m, 3 x 1.50 mm ² , IEC Lock	black	1.0 m	1,50 mm ²	8,6 mm	
EK607SW.2	Extension Cable C20 180° - C19 180°, Black, 2.0 m, 3 x 1.50 mm ² , IEC Lock	black	2.0 m	1,50 mm ²	8,6 mm	
EK607SW.3	Extension Cable C20 180° - C19 180°, Black, 3.0 m, 3 x 1.50 mm ² , IEC Lock	black	3.0 m	1,50 mm ²	8,6 mm	

This datasheet was created automatically on 11-05-2023 . Technical changes reserved.

