
Technical Specifications



1. Power Button

Technical Specifications

HP Z27u G3 QHD USB-C Display

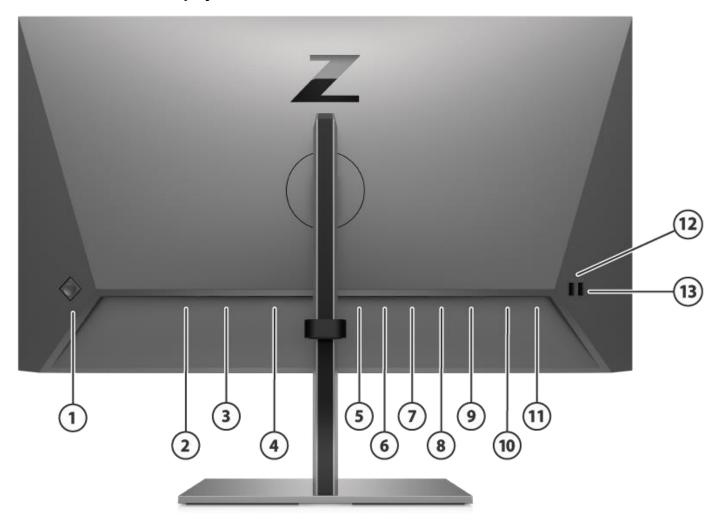

- 1. OSD control
- 2. Security cable slot
- **3.** Master power switch
- 4. Power connector
- 5. HDMI port
- **6.** DisplayPort connector
- 7. DisplayPort connector OUT

Back

- **8.** USB Type-C[™] port with DP Alt Mode 1.4, USB upstream data, and maximum power delivery up to 100 W
- 9. RJ-45 (network) jack
- 10. USB port
- **11.** USB port (Battery charging 1.2, 7.5W)
- 12 USB port
- **13.** USB port (Battery charging 1.2, 7.5W)

Technical Specifications

Panel Specifications Display Size (Diagonal) 27"

Panel Technology IPS **Refresh Rate** 60 Hz **Panel Bit Depth** 8 bit **Aspect Ratio** 16:9 **Brightness (Typical)** 350 nits **Contrast Ratio (Static)** 1000:1 **Contrast Ratio Minimum (Static)** 700:1 **Dynamic Contrast Ratio** 10M:1 Flicker Free Yes

Pixel Pitch 0.2331(mm) x 0.2331(mm)

Pixels Per Inch (Ppi) 109 PPI **Backlight Lamp Life Minimum (To Half** 40 k

Brightness - In Hours)

Backlight TypeEdge-litScreen TreatmentAnti-glareHardness3HHaze25%

Response Time (Typical) 5ms GtG (with overdrive)

Horizontal Viewing Angle (Typical 178°

Cr>10)

Vertical Viewing Angle (Typical Cr>10) 178°

Panel Active Area (W X H) 596.736(H) x 335.66(V)

NOTE: Performance Specifications Represent The Typical Specifications Provided By HP's Component

Manufacturers; Actual Performance May Vary Either Higher Or Lower.

Color sRGB 99 %

P3 D65 85%

Color Management Factory Color Calibrated Yes (Delta E <= 2)

Calibrated Color Presets sRGB, BT.709, (Color Match)

RGB Channel Adjust Yes, Gain **Default Color Temperature** sRGB

Monitor Specifications Bezel 4-sided Micro Edge

Color (Head) Turbo Silver ; (Stand) Turbo Silver

 Tilt
 -5 to +20°

 Swivel
 ±45°

 Pivot
 ±90

 Height Adjust Range
 150mm

Vesa Mounting 100 mm x 100 mm (bracket included)

Security Lock Ready Standard Security Lock Slot

Detachable Stand Yes

Warranty (Number Of Years) 3/3/0 for LA, NA, EMEA, APJ; (3/3/3 in select APJ Countries)
Low Blue Light Mode Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution

certified)

Display Management Software HP Display Center

On Screen Display Brightness +, Color, Image, Input, Power, Menu,

Management, Information, Exit

User-Assignable Function Buttons Yes, 4 buttons

Native ResolutionQHD (2560 x 1440)Maximum Resolution2560 x 1440 @ 60HZ



Technical Specifications

Preset Graphic Modes/Suppored 640 x 480@60Hz Resolutions 800 x 600@60Hz 1280 x 720@60Hz 1024 x 768 @ 60Hz 1280 x 1024 @ 60Hz 1440 x 900 @ 60Hz 1600 x 900 @ 60Hz 1600 x 1200 @ 60Hz 1680 x 1050 @ 60Hz 1920 x 1080 @ 60Hz 1920 x 1200 @ 60Hz 2560 x 1440 @ 60Hz **High Definition Video Formats** 720 x 480i @ 60Hz 720 x 480p @ 60Hz 1280 x 720p @ 60Hz 1920 x 1080i @ 60Hz 720 x 576i @ 50Hz 720 x 576p @ 50Hz 1280 x 720p @ 50Hz 1920 x 1080i @ 50Hz 1920 x 1080p @ 60Hz 1920 x 1080p @ 50Hz 640 x 480p @ 60Hz **Minimum Vertical Scan Rate** 50 Hz **Maximum Vertical Scan Rate** 60 Hz **Minimum Horizontal Scan Rate** 30.0 kHz **Maximum Horizontal Scan Rate** 90.0 kHz **Maximum Pixel Clock** 250 MHz **User Programmable Modes** 10 10 (English, Spanish, German, French, Italian, Netherlands, Languages Portuguese, Japanese, T-Chinese and S-Chinese) DisplayPort™ 1 DisplayPort™ 1.4 1 DisplayPort™ 1.4-out DisplayPort™ Out **HDMI** 1 HDMI 2.0 USB Type-C™ Video Input 1 USB Type-C™ (DP Alt Mode 1.4, power delivery up to USB-A 4 USB-A 3.2 Gen1 (2 for battery charging 1.2, 7.5W) Ethernet Yes Picture-in-Picture, Picture-by-Picture Yes DaisyChain/DisplayPort Multi stream Yes Transport (MST) **User Updateable Firmware** Yes **Power Supply** Internal 100 - 240 VAC 50 / 60 Hz **Power Source Power Consumption- MAX** 160 W **Energy Saving/Stand By Mode** 0.5 W **Power Consumption-Typical** 39 W **Power Cable Length** 1.9 m Operational Mode at 100 VAC 21.33W



Connector Types

Special Features

Power & Operating

ENERGY STAR Data

Specs

21.36W

21.44W

Operational Mode at 115 VAC

Operational Mode at 230 VAC

Technical Specifications

recnnical Specificat	ions			
Eu Energy Efficiency Class (ERP lot-5)	On-mode Power Consumption	23.7W		
	Annual Power Consumption Energy Efficiency Class	35 kWh F		
Operating Conditions	Operating Temperature - Celsius Operating Temperature - Fahrenheit Non-Operatin Temperature - Celsius Non-Operating Temperature - Fahrenheit Operating Humidity Non-Operating Humidity Operating Altitude Non-operating Altitude	5° - 35°C 41° - 95°F -34° - 60°C 29° - 140°F 20 - 80% Relative Humidity 5 - 95% 0 - 5,000 m (16,400 ft.) 0 - 12.192 m (40,000 ft.)	y (non-condensing)	
Environmental Features and Certifications	Mercury-free LED display backlighting Arsenic-Free Display Glass Low Halogen	Yes, Mercury-free LED backlighting Yes Yes WW application CE,CB,KC/KCC/NOM/PSB/EAC/GS/TUV-S/ISO 9241-307/		
	Agency Approvals and Certifications	Low Blue Light/ BIS/cTUVus/CCC/CEL/CECP/SEPA/Energy Star/TCO/TCO Certified Edge/VCCI/FCC/BSMI/WEEE/UAE/Ukraine/ERP/ISC		
	Microsoft WHQL Certification	Yes		
	ENERGY STAR® Certified	Yes		
	EPEAT® Registered	Yes		
	Regions need to verify by country	162		
	China Energy Label	CEL Grade 1		
	TCO Certified Edge	Yes		
	TCO Certified	Yes		
	SmartWay Transport Partnership - NA only	Yes (NA sku)		
Contains Recycled Plastics	Contains Recycled Plastics	81.06%		
	Recyclable Packaging (Box, packing	100% recyclable packaging.		
	materials)	Metric	Imperial	
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	61.23 x 20.5 x 53.04 cm	24.11 x 8.07 x 20.88 in	
	Product Dimensions (Packed) (W x D x H)	69.8 x 42.3 x 16.3 cm	27.48 x 16.65 x 6.42 in	
	Display Head Dimensions (Unpacked without stand) (W x D x H)	61.23 x 3.89x 35.61 cm	24.11 x 1.53 x 14.02 in	
	Base Area Footprint (w x d mm)	246 x 205 mm	9.69 x 8.07 in	
	Bezel Measurement	601.8 mm	23.69 in	
	Product Weight	6.2 kg	13.7 lb	
	(Unpacked with stand) Product Weight	-		
	(Packed)	9.4 kg	20.7 lb	
	Product Weight (Head Only)	4.7 kg	10.36 lb	
What's in the box?	Documentation kit			



DP1.4 Cable (1.8m)

Technical Specifications

USB3.2 Gen2 Type C to C (1m)

Power cable VESA Adapter Cable Holder

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.

English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.



Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log				
January 12, 2021	V1 to V2	Update	Technical Specifications	
February 28,2021	V2 to V3	Update	Energy Efficiency Class	

