

Dual Fans, Perfect Fit

ASUS Innovations



Cooling


A smaller fan hub facilitates longer blades and a barrier ring that increases downward air pressure and a vented backplate to keep noise levels down and GPU temperatures under tight control.



*Image for reference only.

RELIABILITY

Auto-Extreme Technology is an automated manufacturing process that ensure long-term reliability. ASUS GPU Guard prevents cracks, and a 304 stainless steel I/O bracket provides firm mounting.

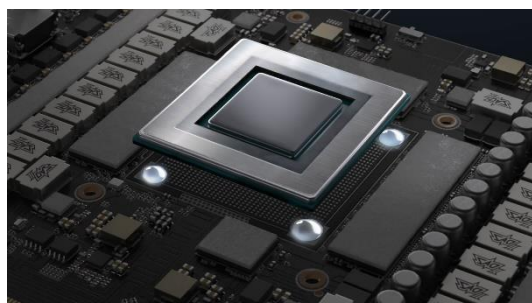


*Image for reference only.

Durability


Dual ball fan bearings ensure long-term durability for your gaming build.

*Image for reference only.

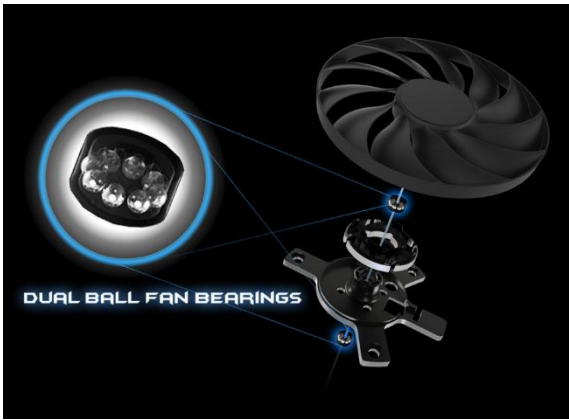

SOFTWARE

GPU Tweak III empowers hardware tweaking and monitoring, while the bundled MuseTree and 1-month Adobe Creative Cloud trial* kickstart your creative journey with AI magic.

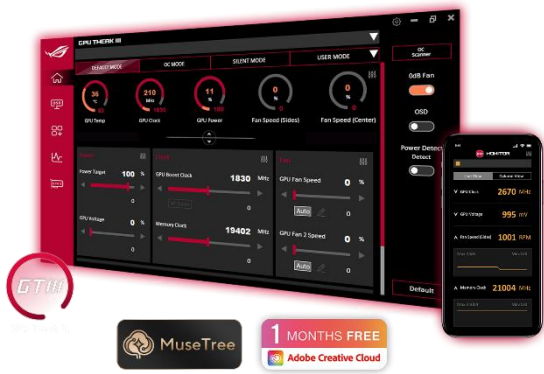

* Limited-time bundle. Promotion period may change without notice.

ASUS Features		I/O Specifications
<div>OC Edition</div> <div>16^{GDDR7} GB Memory</div>	OC edition 2632 MHz GPU boost clock in OC mode for outstanding gaming experience.	A diagram showing the I/O specifications of the ASUS OC edition. It features two LCD/TV monitors connected to a central processing unit. The top monitor is connected via a DisplayPort cable, labeled "DisplayPort compatible". The bottom monitor is connected via an HDMI cable, labeled "HDMI compatible". The central unit has multiple ports on its side, with the DisplayPort and HDMI ports highlighted in orange to match the cables.
	16GB GDDR7 Memory On-board memory for the best gaming experience & the best resolution.	

Specifications

Model Name	DUAL-RTX5060TI-16G
Graphics Engine	NVIDIA® GeForce RTX™ 5060 Ti
CUDA Cores	4608
OpenGL®	OpenGL® 4.6
Engine Clock	OC mode: 2632 MHz Default mode: 2602 MHz (Boost Clock)
Memory Interface	128 bit
Video Memory	16 GB GDDR7
Memory Clock	28 Gbps
AI Performance	767
Power Connector	1 x 8-pin
I/O	1 x Native HDMI 2.1b 3 x Native DisplayPort 2.1b
HDCP Compliant	HDCP 2.3
Digital Max. Resolution	7680 x 4320
Maximum Display Support	4
NVLink/Crossfire Support	NA
Recommended PSU	550W
Bus Standard	PCIe 5.0
Package Contents	1 x Speedsetup Manual 1 x Thank You Card
Software Bundled	ASUS GPU Tweak III & MuseTree & GeForce Game Ready Driver & Studio Driver: please download all software from the support site.
Slot	2.5 slot
Dimension	
Card Size (mm/inch)	229 x 120 x 50 mm 9.02 x 4.72 x 1.97 inch
Color Box (mm)	364 x 217 x 66 mm
Weight	
Single Card (KG)	0.656kg
Product Weight (with packing) (KG)	1.116kg
Note	<p>* Our wattage recommendation is based on a fully overclocked GPU and CPU system configuration. For a more tailored suggestion, please use the “Choose By Wattage” feature on our PSU product page: https://rog.asus.com/event/PSU/ASUS-Power-Supply-Units/index.html</p> <p>* All specifications are subject to change without notice. Please check with your supplier for exact offers. Products may not be available in all markets. If you do not use the latest and current specifications of ASUS products, you shall be liable for all loss and damage claimed by third party to ASUS based on false advertising or any other issues caused from using false specifications of ASUS products.</p> <p>* Maximum Display Support is specifically applied to simultaneous display situation.</p>
Certifications	■ FCC ■ CE ■ C-TICK ■ BSMI ■ KCC ■ VCCI





