


4 Port PCI SuperSpeed USB 3.0 Adapter Card with SATA / SP4 Power

Product ID: PCIUSB3S4

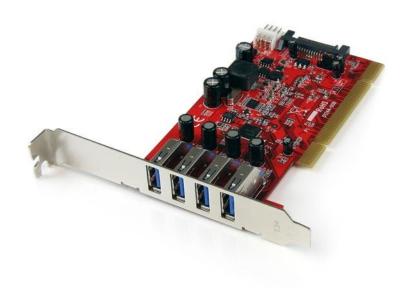

The PCIUSB3S4 4-Port PCI to USB 3.0 Card enables legacy PCI slots to support the SuperSpeed USB 3.0 standard, which is capable of data transfer rates up to 5 Gbps. Using USB 3.0 devices with this card will increase data transfer rates with up to 1.3 Gbps of available bandwidth (PCI bus limit) - more than doubling performance compared to a USB 2.0 connection.

This versatile USB 3.0 adapter includes an optional SATA power connector which allows each USB port to deliver up to 900mA of power to connected USB 3.0 devices - suitable for even the most power hungry devices.

A perfect solution for older PCI-based systems or computers with only PCI expansion slots remaining, the card allows those systems to stay relevant and up-to-date with the latest USB technology. The card is also backward compatible with USB 2.0 and 1.x devices, so it will not only work with any future USB 3.0 devices, but will also support older devices.


The PCIUSB3S4 4-Port PCI USB 3.0 Card is backed by StarTech.com lifetime warranty and free lifetime technical support.





Certifications, Reports and Compatibility







Applications

- Add USB 3.0 capabilities to an older PCI-based system
- Expand system capabilities by adding external USB ports
- Enable Super Speed USB 3.0 data communication for external storage devices and audio/video devices

Features

- 4 external SuperSpeed USB 3.0 ports
- Provides up to 900mA of power over USB 3.0
- Built-in optional SATA power connector for bus-powered USB devices
- Backward compatible with USB 2.0/1.x devices
- Compliant with USB 3.0 base specification 1.0 and xHCI specification 0.95
- Compliant with PCI Specification 3.0
- Includes a low profile/half-height installation bracket



Data Sheet

Hardware Bus Type PCI / PCI-X (5 / 3.3V) Card Type Standard Profile (LP bracket incl.) Chipset ID Renease/NEC - μPD720202 Interface USB 3.0 Ports 4 Performance Maximum Data Transfer Rate 1.3 Gbps (PCI Bus) Type and Rate USB 3.0 - 5 Gbit/s UASP Support Yes Connector(s) Connector Type(s) 1 - PCI / PCI-X (Universal 3.3 & 5V, 32-bit) External Ports 4 - USB Type-A (9 pin) USB 3.0 Female Internal Ports 1 - SATA Power (15 pin) Plug Software OS Compatibility Windows SVP, Vista, 7, 8, 8.1, 10 Windows SVP, Vista, 7, 8, 8.1, 10 Windows SVP, Vista, 7, 8, 8.1, 10 Windows SVP, Vista, 7, 8, 8.1, 10 Windows SVP, Vista, 7, 8, 8.1, 10 Special Notes / Requirements Available PCI slot Environmental Humidity 15% ~ 90% RH Environmental Humidity 15% ~ 90% Ct 13°F to 158°F) Physical Characteristics Product Height 2.6 in [6.5 cm] Product Length 5.2 in [13.3 cm] Product Length 2.5 oz [72 g] <t< th=""><th></th><th></th><th></th></t<>			
Card Type		Warranty	Lifetime
Chipset ID Renesas/NEC - μPD720202 Interface USB 3.0 Ports 4	Hardware	Bus Type	PCI / PCI-X (5 / 3.3V)
Interface Ports 4 Performance Maximum Data Transfer Rate 1.3 Gbps (PCI Bus) Type and Rate USB 3.0 - 5 Gbit/s		Card Type	Standard Profile (LP bracket incl.)
Performance Maximum Data Transfer Rate Type and Rate USB 3.0 - 5 Gbit/s VASP Support Connector(s) External Ports Internal Ports Internal Ports OS Compatibility Special Notes / Requirements Finding Temperature Operating Temperature Storage Temperature Physical Characteristics Product Height Product Length Product Length Product Width Weight of Product Packaging Information Package Height Information Maximum Data Transfer Rate I .3 Gbps (PCI Bus) I.3 Foot (PCI Bus) I.3 Gbps (PCI		Chipset ID	Renesas/NEC - µPD720202
PerformanceMaximum Data Transfer Rate1.3 Gbps (PCI Bus)Type and RateUSB 3.0 - 5 Gbit/sUASP SupportYesConnector(s)Connector Type(s)1 - PCI / PCI -X (Universal 3.3 & 5V, 32-bit)External Ports4 - USB Type-A (9 pin) USB 3.0 FemaleInternal Ports1 - SATA Power (15 pin) Plug1 - SP4 (4 pin, Small Drive Power) PlugSoftwareOS CompatibilityWindows® XP, Vista, 7, 8, 8.1, 10 Windows® Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019Special Notes / RequirementsSystem and Cable RequirementsAvailable PCI slotEnvironmentalHumidity15% ~ 90% RHOperating Temperature-25°C to 50°C (41°F to 122°F)Storage Temperature-25°C to 70°C (13°F to 158°F)Physical CharacteristicsColorRedProduct Height2.6 in [6.5 cm]Product Length5.2 in [13.3 cm]Product Width0.8 in [20 mm]Weight of Product2.5 oz [72 g]Packaging InformationPackage Height1.3 in [33 mm]Package Length5.7 in [14.5 cm]Package Width6.9 in [17.5 cm]		Interface	USB 3.0
Type and Rate UASP Support Ves Connector(s) Connector Type(s) External Ports Internal Ports Internal Ports OS Compatibility Software OS Compatibility Mindows® XP, Vista, 7, 8, 8.1, 10 Windows® XP, Vista, 7, 8, 8.1, 10 Windows® XP, Vista, 7, 8, 8.1, 10 Windows® Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019 Special Notes / Requirements Requirements Humidity Operating Temperature Soft to 50°C (41°F to 122°F) Storage Temperature Operating Temperature Soft to 50°C (41°F to 122°F) Storage Temperature -25°C to 70°C (13°F to 158°F) Physical Characteristics Product Height Product Length Product Width Neight of Product Soft in [6.5 cm] Product Width Neight of Product Soft in [20 mm] Weight of Product Packaging Information Package Length Package Length Fackage Width Soft in [14.5 cm] Package Width Soft in [17.5 cm]		Ports	4
Connector(s)UASP SupportYesConnector(s)Connector Type(s)1 - PCI / PCI -X (Universal 3.3 & 5.V, 32-bit)External Ports4 - USB Type-A (9 pin) USB 3.0 FemaleInternal Ports1 - SATA Power (15 pin) PlugSoftwareOS CompatibilityWindows@ XP, Vista, 7, 8, 8.1, 10Special Notes / RequirementsSystem and Cable RequirementsAvailable PCI slotEnvironmentalHumidity15% ~ 90% RHOperating Temperature5°C to 50°C (41°F to 122°F)Storage Temperature-25°C to 70°C (13°F to 158°F)Physical CharacteristicsProduct Height2.6 in [6.5 cm]Product Length5.2 in [13.3 cm]Product Width0.8 in [20 mm]Weight of Product2.5 oz [72 g]Packaging InformationPackage Height1.3 in [33 mm]InformationPackage Unight5.7 in [14.5 cm]Package Width6.9 in [17.5 cm]	Performance	Maximum Data Transfer Rate	1.3 Gbps (PCI Bus)
Connector(s) Connector Type(s) External Ports External Ports Internal Ports Inte		Type and Rate	USB 3.0 - 5 Gbit/s
External Ports Internal Power (15 pin) Plug Internal Power (15 pin) Pl		UASP Support	Yes
Internal Ports 1 - SATA Power (15 pin) Plug 1 - SP4 (4 pin, Small Drive Power) Plug Software OS Compatibility Windows® XP, Vista, 7, 8, 8.1, 10 Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019 Special Notes / Requirements Available PCI slot Available SATA or Floppy power connector Environmental Humidity Operating Temperature S°C to 50°C (41°F to 122°F) Storage Temperature -25°C to 70°C (13°F to 158°F) Physical Characteristics Product Height Product Length Product Width 0.8 in [6.5 cm] Product Width 0.8 in [20 mm] Weight of Product Veight of Product Package Height Package Height 1.3 in [33 mm] Package Length Package Width 6.9 in [17.5 cm]	Connector(s)	Connector Type(s)	1 - PCI / PCI-X (Universal 3.3 & 5V, 32-bit)
Software OS Compatibility Windows® XP, Vista, 7, 8, 8.1, 10 Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019 Special Notes / Requirements Packaging Information OS Compatibility Vindows Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019 Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019 Available PCI slot Available SATA or Floppy power connector Environmental Humidity 15% ~ 90% RH Operating Temperature 5°C to 50°C (41°F to 122°F) For 50°C (13°F to 158°F) Product Height 2.6 in [6.5 cm] Product Height 0.8 in [20 mm] Weight of Product 2.5 oz [72 g] Package Height 1.3 in [33 mm] Information Package Width 5.7 in [14.5 cm] Package Width 6.9 in [77.5 cm]		External Ports	4 - USB Type-A (9 pin) USB 3.0 Female
Software OS Compatibility Windows® XP, Vista, 7, 8, 8.1, 10 Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016, 2019 Special Notes / Requirements System and Cable Requirements Available PCI slot Available SATA or Floppy power connector Environmental Humidity Operating Temperature S°C to 50°C (41°F to 122°F) Storage Temperature -25°C to 70°C (13°F to 158°F) Physical Characteristics Product Height Product Length Product Length Product Width Weight of Product Weight of Product 2.5 oz [72 g] Package Height 1.3 in [33 mm] Package Length Package Length Package Width 6.9 in [17.5 cm]		Internal Ports	1 - SATA Power (15 pin) Plug
Special Notes / RequirementsSystem and Cable RequirementsAvailable PCI slotEnvironmentalHumidity15% ~ 90% RHOperating Temperature5°C to 50°C (41°F to 122°F)Storage Temperature-25°C to 70°C (13°F to 158°F)Physical CharacteristicsProduct Height2.6 in [6.5 cm]Product Length5.2 in [13.3 cm]Product Width0.8 in [20 mm]Weight of Product2.5 oz [72 g]Packaging InformationPackage Height5.7 in [14.5 cm]Package Width6.9 in [17.5 cm]			1 - SP4 (4 pin, Small Drive Power) Plug
Requirements Available SATA or Floppy power connector Environmental Humidity 15% ~ 90% RH Operating Temperature 5°C to 50°C (41°F to 122°F) Storage Temperature -25°C to 70°C (13°F to 158°F) Physical Characteristics Product Height 2.6 in [6.5 cm] Product Length 5.2 in [13.3 cm] Product Width 0.8 in [20 mm] Weight of Product 2.5 oz [72 g] Packaging Information Package Height 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]	Software	OS Compatibility	Windows Server® 2003, 2008 R2, 2012, 2012 R2, 2016,
EnvironmentalHumidity15% ~ 90% RHOperating Temperature5°C to 50°C (41°F to 122°F)Storage Temperature-25°C to 70°C (13°F to 158°F)Physical CharacteristicsColorRedProduct Height2.6 in [6.5 cm]Product Length5.2 in [13.3 cm]Product Width0.8 in [20 mm]Weight of Product2.5 oz [72 g]Packaging InformationPackage Height1.3 in [33 mm]Package Uidth5.7 in [14.5 cm]Package Width6.9 in [17.5 cm]	-	System and Cable Requirements	Available PCI slot
Operating Temperature 5°C to 50°C (41°F to 122°F) Storage Temperature -25°C to 70°C (13°F to 158°F) Physical Characteristics Product Height 2.6 in [6.5 cm] Product Length 5.2 in [13.3 cm] Product Width 0.8 in [20 mm] Weight of Product 2.5 oz [72 g] Packaging Information Package Height 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]			Available SATA or Floppy power connector
Physical Characteristics Product Height Product Length Product Width Weight of Product Packaging Information Package Length Package Width Package Vidth Pack	Environmental	Humidity	15% ~ 90% RH
Physical CharacteristicsColorRedProduct Height2.6 in [6.5 cm]Product Length5.2 in [13.3 cm]Product Width0.8 in [20 mm]Weight of Product2.5 oz [72 g]Packaging InformationPackage Height1.3 in [33 mm]Package Length5.7 in [14.5 cm]Package Width6.9 in [17.5 cm]		Operating Temperature	5°C to 50°C (41°F to 122°F)
Product Height 2.6 in [6.5 cm] Product Length 5.2 in [13.3 cm] Product Width 0.8 in [20 mm] Weight of Product 2.5 oz [72 g] Packaging Information Package Length 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]		Storage Temperature	-25°C to 70°C (13°F to 158°F)
Product Length Product Width 0.8 in [20 mm] Weight of Product 2.5 oz [72 g] Packaging Information Package Height 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]		Color	Red
Product Width Weight of Product 2.5 oz [72 g] Packaging Information Package Height 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]		Product Height	2.6 in [6.5 cm]
Packaging InformationPackage Height1.3 in [33 mm]Package Length5.7 in [14.5 cm]Package Width6.9 in [17.5 cm]		Product Length	5.2 in [13.3 cm]
Packaging Information Package Height 1.3 in [33 mm] Package Length 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]		Product Width	0.8 in [20 mm]
Information Package Length 5.7 in [14.5 cm] Package Width 6.9 in [17.5 cm]		Weight of Product	2.5 oz [72 g]
Package Width 6.9 in [17.5 cm]		Package Height	1.3 in [33 mm]
		Package Length	5.7 in [14.5 cm]
Shipping (Package) Weight 5.8 oz [165 g]		Package Width	6.9 in [17.5 cm]
		Shipping (Package) Weight	5.8 oz [165 g]



Data Sheet

What's in the Box	Included in Package	1 - PCI USB 3.0 Card
		1 - Low Profile Bracket
		1 - Driver CD
		1 - Instruction Manual

Product appearance and specifications are subject to change without notice.