

Lenovo ThinkVision T34WD-40 Monitor

Catapults your productivity to a whole new level.




Striking visual clarity and savings

View your work in seamless quality with a 120Hz variable refresh rate¹ for animation or fast-moving pictures. The monitor can automatically reduce the refresh rate to 48Hz for less demanding content, saving more power in the long run.



Exceptional productivity, intelligent docking

Immerse yourself in work and maximize your productivity on this monitor with its large 34-inch screen size and 1500R curvature. Collaborate with your colleagues easily with the wide viewing angles of the VA panel. Power up work devices at full throttle with 100W PD 3.0² on ThinkVision T34WD-40 monitors.

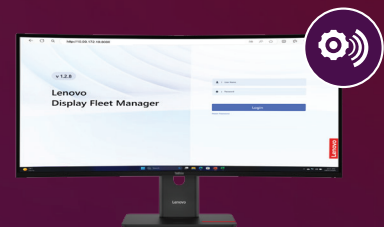

Supremely efficient asset management

Manage and control your monitor assets with Lenovo Display Fleet Manager (LDFM). This innovative software solution empowers IT managers with robust tools for rapid and streamlined asset management, efficient firmware upgrades, and centralized settings control.

Lenovo ThinkVision T34WD-40 Monitor

Display

Panel Size
34-inch

Screen Dimensions
801.1 mm x 351.0 mm

Panel Type
4-sided Ultra Thin,
VA

Active Area
797.2 mm x 333.7 mm

Curvature
1500R

Backlight
WLED

Aspect Ratio
21:9

Resolution
3440 x 1440

Pixel Pitch
0.2318 mm x 0.2318 mm

**Dot/Pixel Per Inch
(DPI/PPI)**
110

**Viewing Angle
(H x V @ CR 10:1)**
178° / 178°

Response Time
4ms (Extreme Mode),
6ms (Normal Mode)

Refresh Rate
48 Hz - 120 Hz

Brightness
300 cd/m²

Contrast Ratio (Typical)
3000:1

**Dynamic Contrast Ratio
(Typical)**
3M:1

**Color Gamut
(Coverage Ratio)**
99% sRGB (CIE 1931),
99% BT.709 (CIE 1931)

Color Support (Typical)
16.7 Million

Color Depth
True 8-bit

HDR Compliance
Yes (HDR10)

Anti-glare
Yes

Connectivity

Video Signal
1 x USB-C³ (DP 1.4 Alt Mode HBR2)
1 x HDMI 2.1⁴
1 x DP 1.4⁵ (HBR2)

Ethernet (RJ45)
Yes (IG)

USB Upstream
1 x USB-C (USB 5Gbps / USB 3.2 Gen 1)⁶

USB Downstream
3 x USB-A (USB 5Gbps / USB 3.2 Gen 1)⁶
1 x USB-C (USB 5Gbps / USB 3.2 Gen 1,
up to 15W PD (data only))⁶

Multimedia

Modular Camera/Speaker Support
Yes (Optional Support⁷)

Special Features

Software
LDFM (Lenovo Display Fleet Manager)
Lenovo ThinkColour (Lenovo Accessories
and Display Manager)⁸

Natural Low Blue Light
Yes

Power

Power Consumption (Typ. / Max.)
30.0W / 200.0W

Power Consumption Sleep/Off Mode
< 0.5W

Power Consumption Switch-Off Mode
< 0.3W

**ENERGY STAR Power Consumption
(Pon / E_{TEC})**
25.6W / 82.0kWh

Power Supply
Internal

Upstream Power Delivery⁹
Up to 100W PD3.0²

Smart Power
Yes

Voltage Required
AC 100 to 240 V (50-60 Hz)

Mechanical

Tilt Angle (Front / Back)
-5° / 23.5°

Swivel Angle (Left / Right)
-45° / 45°

Lift (Max. Range)
155 mm

VESA Mount Capability
Yes (100 x 100 mm)

ThinkCentre M Series Tiny Support
Yes, by ThinkCentre Tiny
Mounting Kit¹⁰ (PN: 4XFIR07369)

Kensington Lock Slot
Yes (2.5 mm x 6 mm)

Cable Management
Yes

Bezel Color
Eclipse Black

Bezel Width (Side)
2.0 mm

Bezel Width (Top)
2.0 mm

Bezel Width (Bottom)
12.2 mm

Dimension

Size Packed (W x D x H, mm/inch)
980.0 x 186.0 x 495.0 mm
38.58 x 7.32 x 19.49 inches

**Size Unpacked w/ Stand
(Highest Position)
(W x D x H, mm/inch)**
806.1 x 220.0 x 545.4 mm
31.74 x 8.66 x 21.47 inches

**Size Unpacked w/ Stand
(Lowest Position)
(W x D x H, mm/inch)**
806.1 x 220.0 x 390.4 mm
31.74 x 8.66 x 15.37 inches

**Size Unpacked w/o Stand
(Head Only) (W x D x H, mm/inch)**
806.1 x 114.7 x 356.5 mm
31.74 x 4.52 x 14.04 inches

Weight Packed (kg / lbs.)
13.7 kg / 30.3 lbs.

Weight Unpacked (kg / lbs.)
9.2 kg / 20.3 lbs.

**Weight (Monitor Head Only)
(kg / lbs.)**
6.4 kg / 14.1 lbs.

What's in the Box

Monitor with Stand
Yes

Power Cable (Cable Length)
1 x Power Cable (1.8 m)

DP Cable (Cable Length)
1 x DP 1.4 Cable (1.8 m)

USB Cable (Cable Length)
1 x USB-C to USB-C Gen1 Cable
(1.8m, 5Gbps)

Quick Setup Guide
Yes

Certification

ENERGY STAR Certification
Yes

TCO
10

TCO Edge
2.0

EPEAT
Gold

Windows Certification
Windows 10, Windows 11

EU Energy Level Certification
Yes (Level-E)

China Energy Efficiency Standard
Tier 2

TÜV Rheinland Eye Comfort
5 Stars

TÜV Rheinland Flicker Free
Yes

**TÜV Low Blue Light
(Hardware Solution)**
Yes

Eyesafe Display Certification
Yes (Eyesafe 2.0)



¹ VRR as specified in HDMI 2.1, DRR for Microsoft Windows. | ² The output rating (100W, 20V/5A) is designed based on the Lenovo VDM developed by Lenovo. This product can achieve the output rating (100W, 20V/5A) when it connects products that support Lenovo VDM developed by Lenovo. | ³ USB Type-C and USB-C are registered trademarks of USB Implementers Forum. | ⁴ Supports 3440 x 1440 @ 120 Hz as specified in HDMI 2.1. | ⁵ Supports max. bandwidth 32.4 Gbps. | ⁶ The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed. USB 2.0: 480 Mbit/s; USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1) 5 Gbit/s; USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2) 10 Gbit/s; USB4[®] 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps) 20 Gbit/s; USB4[®] 40Gbps (USB 40Gbps) 40 Gbit/s; Thunderbolt™ 3/4: 40 Gbit/s. | ⁷ Compatible with ThinkVision VoIP Stack MC60 Monitor Webcam and MS30 Monitor Soundbar. | ⁸ Formerly Lenovo Display Control Center. Supports Windows 10 & 11, Mac OS (functions vary across systems). | ⁹ Listed as maximum capacity of power delivery. Actual capacity of power delivery may vary depending upon devices connected or monitor configuration, and may decline with downstream USB ports connected or higher brightness setting. | ¹⁰ Sold separately. Need to assemble ThinkCentre Tiny mounting kit (PN: 4XFIR07369) to support Tiny PC installation.