

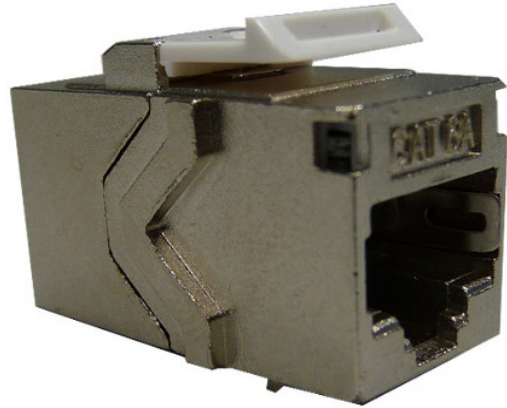
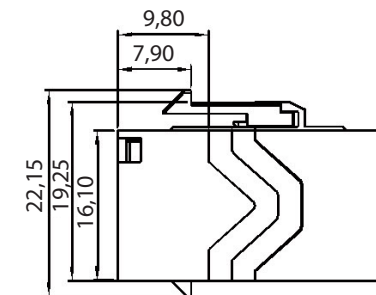


Cat.6A Snap-In adapter



Art.No.	Type
37521.1V2	Cat.6A RJ45/RJ45 STP Modular Adapter, keystone type, shielded

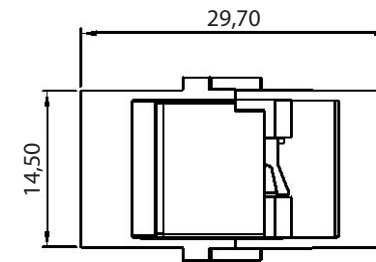

- Cat.6A RJ45 jack/jack, shielded
- Suitable for Keystone holes

Electrical characteristics

- Current rating: max. 1.5A
- Dielectric withstanding voltage: 1000V AC 60Hz
- Insulation resistance: min. 500 MOhm
- Contact resistance: 20 mOhm

Mechanical characteristics

- Material: Zn alloy
- Cosmetic: Sandblasting + Electroplating Ni
- RJ45 jack contact: Phosphor bronze, 50µ Gold plating
- Cavity conforms to FCC Part 68

RoHS
compliant

Created BF	Date 22.07.16	Cat.6A Snap-In adapter 37521.1V2	File:37521.1V2_eng
Last rev. BF	Date 22.07.16		