

Data Sheet

BenQ RE7503

Large Format Touch Display

- BenQ EZWrite 6
- Wireless image transfer with InstaShare2
- Device and user management
- BenQ ClassroomCare™ (Anti-Glare, Flicker-Free, Low Blue Light)



Panel

Model : RE7503
Item No. / EAN Code : 9H.F86TC.DE2 / 471 8755 08995 4
Type : 190,5 cm / 75" Wide TFT
Native Resolution : 3.840 x 2.160 4K / 16:9
Active Display Area W x H : 1.649,7 x 927,9 mm
Panel / Pixel pitch : 10 Bit (1,07 Mrd. Farben) / 0,43 x 0,43 mm
Colour Gamut : 72% NTSC
Backlight : direct LED, 50.000 Std. (typ.)
Brightness : 400 cd/m²
Contrast : 1.200:1 (typ.) | 30.000:1 (dynamic)
Viewing Angle H/V : 178° / 178°
Response time : 8 ms
Frame Rate : 60 Hz
Eye-care : Low-blue light (TÜV Rheinland, Eye-Care), Flicker free
Operating time hours / day : 18/7

Touch

Manufacturing Technology : Zero Bonding
Protection glass thickness / hardness : 3,2 mm / 9H
Protection glass surface : Anti-glare coating, 25%
Transparency : >88%
Touch Technology : Fine+ IR-Touch
Resolution / Points : 32.768 x 32.768 / 40 Touch-Points
Accuracy : ±1.5 mm
Pen requirement : Min. 2,8 mm
Response time : < 10 ms
OS Supported : Windows 7/8/10 | Linux | Mac OS X | Android | Chrome
Touch-Output : 2x USB 2.0 (Type B)
Windows-Ink : Yes

Änderungen vorbehalten

Letzte Änderung am 03.03.2023

Aktuelle Datenblätter unter: www.BenQ.de, www.BenQ.at und www.BenQ.ch

BenQ Deutschland GmbH, Essener Straße 5, 46047 Oberhausen

BenQ Deutschland GmbH, Niederlassung Österreich, Wehlstraße 27b/Stg. 2 DG/ Top5, 1200 Wien

BenQ Deutschland GmbH, Oberhausen, Zweigniederlassung Baden, Täferstrasse 32, 5405 Baden-Dättwil


BenQ

BenQ RE7503

Sensors	Ambient Light Sensor : 1x
Integrated OS	SoC : AML T982 CPU : A55 x 4 GPU : G52 MP4 OS : Android 11.0 Memory Storage : 4GB 32GB Pre-Installed Applications : EZWrite 6.0, X-Sign Broadcast, DMS Cloud / Local, TeamViewer Meeting, Teamviewer QS, WPS, Firefox, InstaShare 2, BenQ App Store, more s. user manual
Input	Video : 1x VGA, 3x HDMI (2.0) Audio : 1x VGA (3,5 mm mini jack) USB-A 2.0 : 2x USB-A 3.2 Gen 1 : 4x USB-B 2.0 : 2x (Touch) USB-C 3.2 Gen 1 : 1x, w. PD65W Control : 1x RS232 Network : 2x RJ45 (10 / 100 / 1000 Mbps) OPS Slot : 1x
Output	Video : 1x HDMI (2.0) Audio : 1x Line-Out (3,5 mm mini jack), 1x SPDIF
Audio	Audio Performance Speakers : 20W 2x
Other	Wake Up : Lan, HDMI, VGA,
Energy	Power supply : Build in Operating voltage : 100 ~ 240 VAC ; 50 / 60 Hz Power consumption : (98,0 On <0,5 Sleep <0,5 Off) Watt Energy efficiency : Energy 8.0 certified
Certifications	Safety : CE Certifications : Energy 8.0 certified
Environment	Operating : 0 ~ +40°C ; 10 ~ 90% humidity Storage : -10 ~ +60°C ; 10 ~ 90% humidity
Miscellaneous	VESA Mounting : 800 x 400 mm, M 8 x 25 L Installation : Landscape Weight : 48,15 kg (net) / 61,85 kg (gross) Bezel width (U / D / L / R) : 16,4 mm / 44,9 mm / 16,4 mm / 16,4 mm Size (W x H x D) : 1.709,4 x 1020,2 x 87,7 mm Scope of supply : IR-Remote, Power cable, VGA cable (3,0 m), HDMI cable (3,0 m), USB-B Touch cable (3,0 m), USB-C cable (1,5 m), Quick start Guide, User manual (online), passive pen 2x, Wall mount Optional Accessories : WD02AT (Wi-Fi 6.0 w. Bluetooth 5.2 Dongle) Item-No. 5A.F8Y28.DEI Warranty and Service : 3 years on side service

BenQ RE7503

Dimensions:

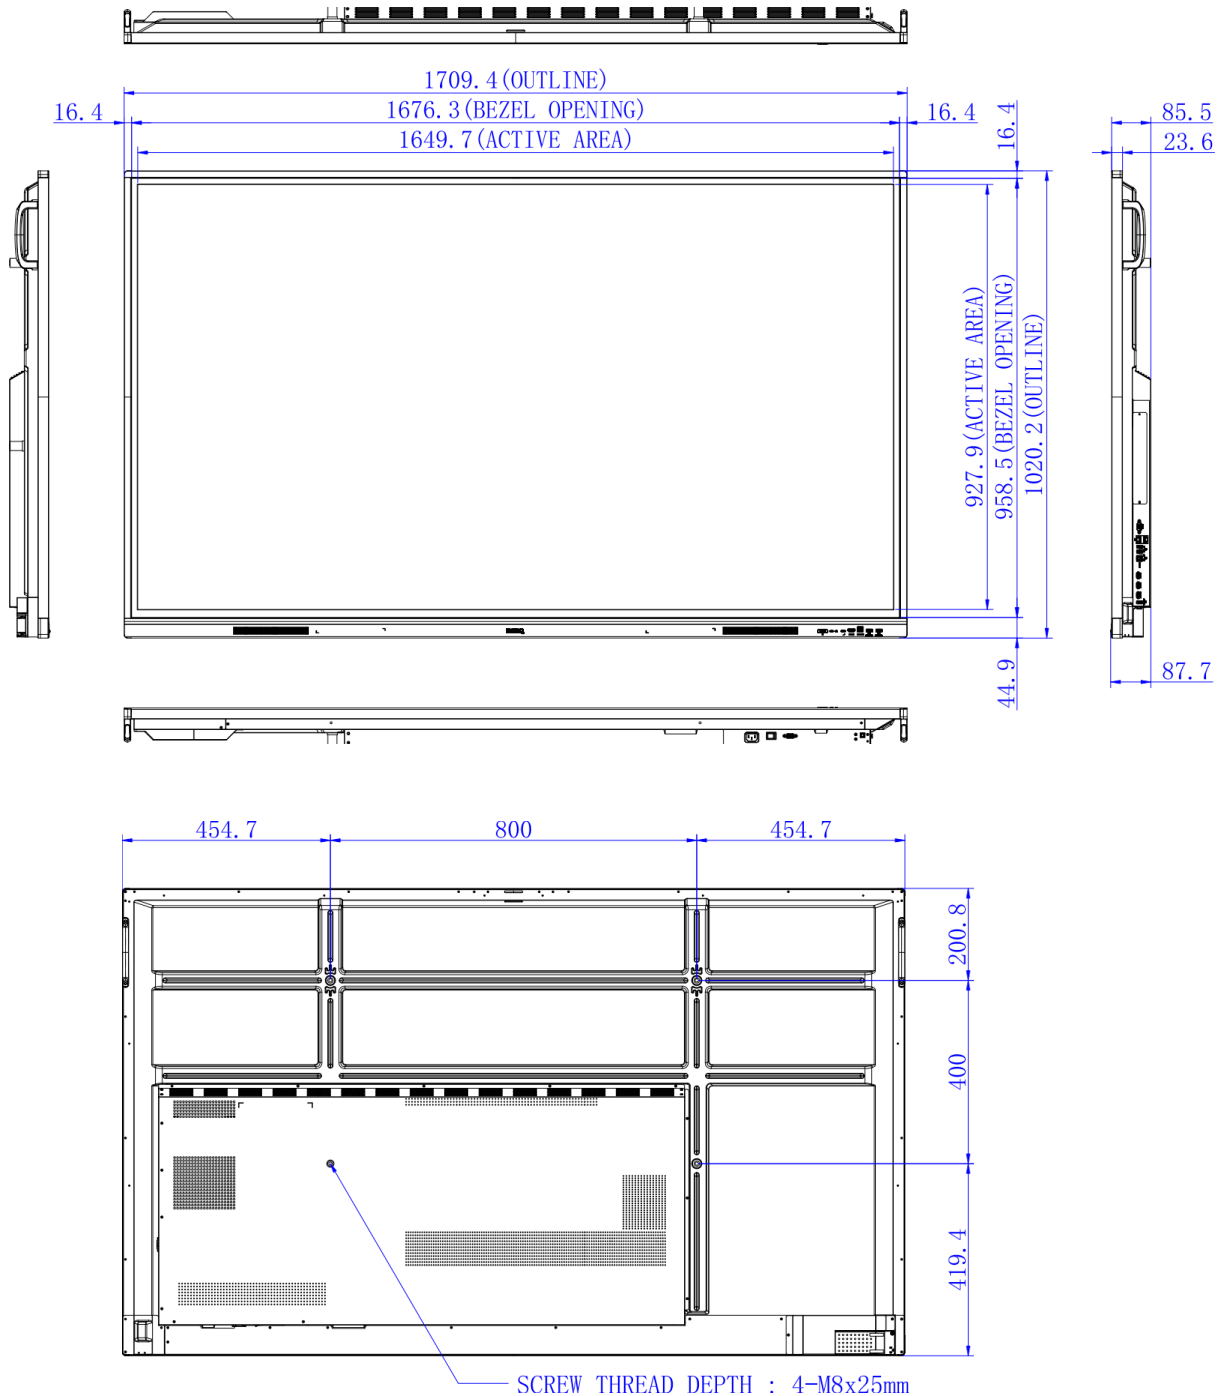

Änderungen vorbehalten

Letzte Änderung am 03.03.2023

Aktuelle Datenblätter unter: www.BenQ.de, www.BenQ.at und www.BenQ.ch

BenQ Deutschland GmbH, Essener Straße 5, 46047 Oberhausen

BenQ Deutschland GmbH, Niederlassung Österreich, Wehlstraße 27b/Stg. 2 DG/ Top5, 1200 Wien

BenQ Deutschland GmbH, Oberhausen, Zweigniederlassung Baden, Täfernstrasse 32, 5405 Baden-Dättwil

BenQ