

# ViewSonic® PROJECTOR

## LSC520WU


### Key Features

- 5,200 ANSI Lumens offering bright images in any environment
- Up to a 300" ultra-large screen with a lower cost-per-inch
- Supports a 21:9 aspect ratio, ideal for Microsoft Teams Rooms
- Installation flexibility: V lens shift, 1.6x optical zoom, and H/V keystone correction
- 3rd generation laser phosphor technology with a lifespan up to 30,000 hours



### Product Description

The LSC520WU is a lamp-free, high-brightness projector designed for commercial, educational, and public spaces. Utilising 3rd generation laser phosphor technology, this projector delivers 5,200 ANSI Lumens of brightness for up to 30,000 hours and can project an ultra-large screen up to 300" in WUXGA resolution. Ideal for modern workplaces, its 21:9 aspect ratio is optimised for Microsoft Teams Rooms applications, enhancing collaborative environments. Equipped with features like V lens shift, 1.6x optical zoom, H/V keystone correction, and 360° projection capabilities, the LSC520WU offers flexible setup possibilities. Additionally, its comprehensive LAN control ensures seamless integration into existing device management networks.

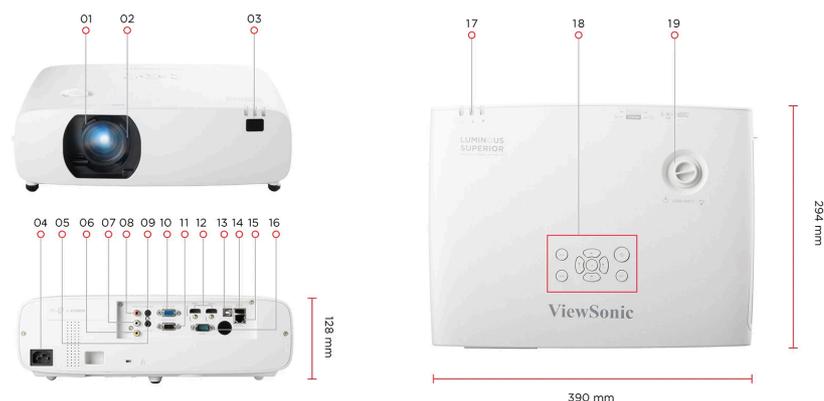

**SPECIFICATION**

	1. Zoom Ring	8. Audio In (R)
	2. Focus Ring	9. Audio Out
<b>Native Resolution:</b>	1920x1200	
<b>Brightness:</b>	5200 (ANSI Lumens)	
<b>Brightness (Center Lumens):</b>	6000	
<b>Contrast Ratio:</b>	3000000:1	
<b>Display Color:</b>	1.07 Billion Colors	
<b>Light Source Type:</b>	Laser Phosphor	
<b>Light Source Life (hours) with Normal Mode:</b>	20000	
<b>Light Source Life (hours) with SuperEco Mode:</b>	30000 (Eco)	
<b>Lens:</b>	F=1.58-2.02, f=15.3-24.6mm	
<b>Projection Offset:</b>	0%+/-5%	
<b>Throw Ratio:</b>	1.08-1.76	
<b>Optical Zoom:</b>	1.6X	
<b>Digital Zoom:</b>	1.0x-4.0x	
<b>Image Size:</b>	30"-300"	
<b>Throw Distance:</b>	0.70-11.37m (100"@2.33m)	
<b>Keystone:</b>	H:+/-30° , V:+/-30°	
<b>Lens Shift V. Range:</b>	+45%, 0%	
<b>Audible Noise (Normal):</b>	35dB	
<b>Audible Noise (Eco):</b>	26dB	
<b>Input Lag:</b>	60ms	
<b>Resolution Support:</b>	VGA(640 x 480) to 4K(3840 x 2160@30Hz)	
<b>HDTV Compatibility:</b>	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p@30Hz	
<b>Horizontal Frequency:</b>	15K-100KHz	
<b>Vertical Scan Rate:</b>	23-85Hz	

**INPUT**

<b>Computer in (share with component):</b>	1
<b>Composite:</b>	1
<b>HDMI:</b>	2 (HDMI 1.4/ HDCP 1.4)
<b>Audio-in (3.5mm):</b>	1
<b>Audio-in (RCA R/L):</b>	1
<b>USB Type A:</b>	1 (5V/1.5A)

**OUTPUT**

<b>Monitor out:</b>	1
<b>Audio-out (3.5mm):</b>	1
<b>Speaker:</b>	16W
<b>USB Type A (Power):</b>	1 (USB2.0 - 5V/1.5A, share with USB A Input)

**CONTROL**

<b>RS232 (DB 9-pin male):</b>	1
<b>RJ45 (LAN control):</b>	1
<b>USB Type B (Services):</b>	1

**OTHERS**

	15. RJ45
	16. RS232
<b>Power Supply Voltage:</b>	100-240V+/- 10%, 50/60Hz (AC in)
<b>Power Consumption:</b>	Normal: 230W Standby: <0.5W
<b>Operating Temperature:</b>	0~40°C
<b>Carton:</b>	Brown
<b>Net Weight:</b>	5.2kg
<b>Gross Weight:</b>	7.23kg
<b>Dimensions (WxDxH) with Adjustment Foot:</b>	390x294x128mm
<b>Packing Dimensions:</b>	492x443x239mm
<b>OSD Language:</b>	English, German, French, Italian, Spanish, Polish, Swedish, Dutch, Portuguese, Japanese, Simplified Chinese, Traditional Chinese, Korean, Russian, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak, Vietnamese, Thai, Farsi, total 25 languages
<b>User Guide Language:</b>	English, S-Chinese, T-Chinese, Indonesian, Finish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

**STANDARD ACCESSORY**

<b>Power Cord:</b>	1
<b>Remote Control:</b>	1
<b>QSG:</b>	Yes
<b>Air Filter:</b>	Yes
<b>Warranty Card:</b>	Yes (CN Only)

**OPTIONAL ACCESSORY**

<b>Air Filter:</b>	Yes
<b>Wall/Ceiling Mount:</b>	PJ-WMK-007

