


## ECOSYS PA2100cwx & ECOSYS PA2100cx:

# A legacy reinforced

The ECOSYS PA2100cwx & ECOSYS PA2100cx is a compact A4 printer that blends the best of Kyocera's ECOSYS technology with modern innovation to meet the needs of the most demanding workspaces, be they shared work hubs or remote locations.

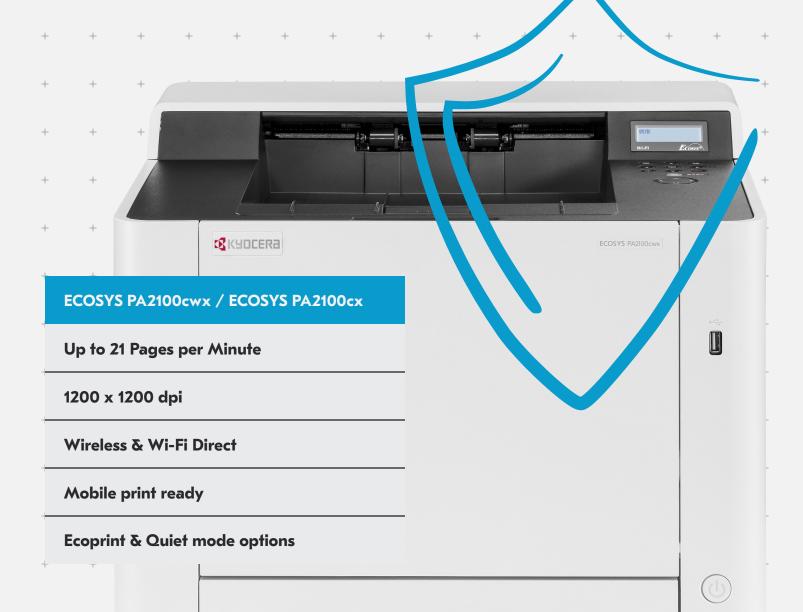

### ECOSYS PA2100cwx / PA2100cx

#### GENER AL

Technology: KYOCERA ECOSYS, Colour Laser Control panel: 2 line LCD back lit display

Engine speed: Up to 21 pages A4 per minute in colour and b/w

Resolution: 1,200 x1,200 dpi print at reduced speed, multibit technology for print quality of up to 9,600 x 600 dpi (print), 600 x 600 dpi

Duty cycle: Max. 65,000 pages per month Warm-up time: Approx. 32 seconds or less Time to first print: Approx. 11/12.5 seconds or less in

CPU: 800MHZ

Memory: Standard 512 MB, max. 512 MB Standard Interface:

ECOSYS PA2100cx: USB 2.0 (Hi-Speed), USB Host Interface, Gigabit Ethernet (10BaseT/100BaseTX/1000BaseT), Slot for optional SD/SDHC-Card ECOSYS PA2100cwx: USB 2.0 (Hi-Speed), USB Host Inter-

face, Gigabit Ethernet (10BaseT/100BaseTX/1000BaseT), Wireless LAN, Slot for optional SD/SDHC-Card

Dimensions (W x D x H): Main unit: 410 x 410 x 329 mm Weight: Main unit: Approx. 21 kg

Power source: AC 220 - 240 V. 50/60 Hz

Power consumption:

Printing: 345 W Ready mode: 33 W Sleep mode: 0,9 W

Noise (Sound pressure level: ISO 7779/ISO 9296):

Printing in colour: 48/48 dB(A) LpA Ready/Standby mode: 30 dB(A) LpA Sleep mode: Immeasurably low Safety standards: GS, TUV, CE

This unit is manufactured according to ISO 9001 quality standard and ISO 14001 environmental standard.

#### PAPER HANDLING

All paper capacities quoted are based on a paper thickness of max. 0.11 mm. Please use paper recommended by KYOCERA under normal environmental conditions

Input capacity: 50-sheet multi-purpose tray; 60-220 g/m<sup>2</sup>; A4, A5, A6, B5, B6, Letter, Legal, Custom (70 x 148 mm-216 x 356 mm) 250-sheet universal cassette; 60-163 g/m<sup>2</sup>; A4, A5, A6, B5, B6, Letter, Legal, Custom (105 x 148-216 × 356 mm). Max. input capacity with options: 550 sheets

Duplex functionality as standard: Double-sided printing: 60-120 g/m7; A4, A5, B5, Letter, Legal

Output capacity: Max. 150 sheet face down

#### PRINT FUNCTIONS

Controller language: PRESCRIBE IIc

Emulations: PCL 6 (PCL 5c/PCL-XL), PostScript 3 (KPDL 3), PDF Direct Print, XPS Direct Print

Operating systems: All current Windows operating systems, MAC OS X Version 10.8 or higher, Unix, Linux as well as other operating systems on request

Fonts/Barcodes: 93 scalable fonts for PCL/PostScript, 8 fonts for Windows Vista, 1 bitmap font, 45 barcodes (e.g. EAN8, EAN13, EAN128) with automatic generation of checksums as well as support of two-dimensional barcodes PDF-417 under PRESCRIBE (PC and other barcodes available as an option)

#### **CONSUMABLES**

Average continuous toner yield in accordance with ISO/IEC 19798

Toner-Kit TK-5440K: black toner yield 2,800 pages A4 Toner-Kit TK-5430K: black toner yield 1,250 pages A4 Toner-Kit TK-5430C, TK-5430M, TK-5430Y: cyan, magenta, yellow toner yield 1,250 pages

Toner-Kit TK-5440C, TK-5440M, TK-5400Y: cyan, magenta, yellow 2,400 yield

#### OPTIONS

PF-5110 Paper feeder: 250 sheets; 60-163 g/m°; A4, A5, A6, B5, B6, Letter, Legal, Custom (105 x 148 mm-216 x356 mm)

UG-33: ThinPrint support

USB IC Card Reader + Card Authentication Kit (B): Support for various authentication keys available CB-510-B: Wooden cabinet

#### WARRANTY

1-year warranty\*\* as standard. KYOCERA guarantees the drum and developer for 3 years or maximum 100,000 pages A4 (whichever occurs sooner), provided the printer is used and cleaned in accordance with the service instruc-

The up to 5-year on-site warranty extension for printer and options.

Specifications and design are subject to change without notice. TASKalfa, PRESCRIBE, Kyocera Net Manager, Kyocera Net Viewer, Kyocera Device Manager, PDF Direct Print, Command Center RX, and KX Driver are trademarks of The Kyocera Companies. Mac OS and AirPrint are trademarks of Apple, Inc. Mopria is a trademark of Mopria Alliance, Inc. Windows is a trademark of Microsoft, Inc. All other trademarks are the property of their respective owners.







KYOCERA Document Solutions Europe B.V. -Bloemlaan 4, 2132 NP Hoofddorp, The Netherlands Tel +31 (0) 20-654-0000 — Fax +31 (0) 20-653-1256



Kyocera Document Solutions Partner

kyoceradocumentsolutions.eu