


LINDY PRODUCT SPECIFICATION (1 OF 1)

Length	Polybag Size	Product Number
0.3m	P1	47130
0.5m	P1	47131
1.0m	P2	47132
1.5m	P2	47133
2.0m	P2	47134
3.0m	P2	47135
5.0m	P3	47136
7.5m	P3	47137
10m	P3	47138
15m	P3	47139
20m	P4	47140
30m	P4	47141

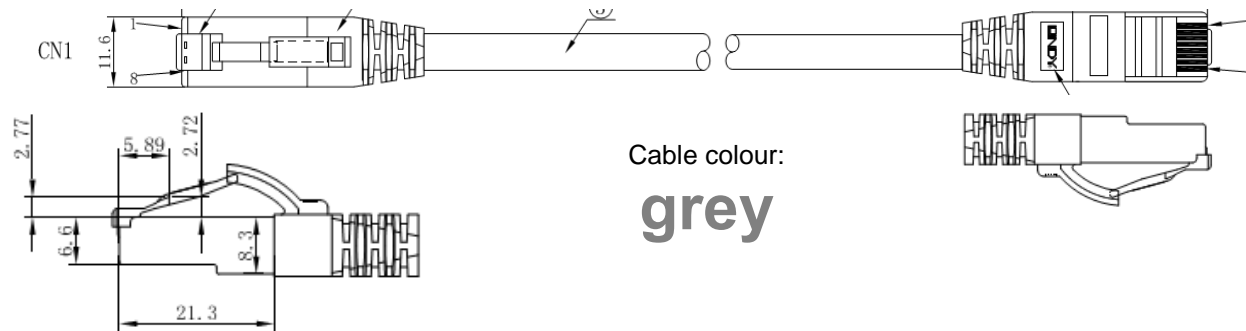


Cable printing: CAT 6A S/FTP PIMF PATCH CABLE 500MHz 4PAIRS 100ohm UL E321484 AVM 2835 RoHS 2.0 COMPLIANT LSZH Halogen Free --- www.LINDY.com

A B

PIN OUT

CN1 (568B)		CN2 (568B)	
WHITE 1	1	WHITE 1	1
ORANGE 2	2	ORANGE 2	2
RED 3	3	WHITE 3	3
GREEN 6	6	GREEN 6	6
BLUE 4	4	BLUE 4	4
WHITE 5	5	WHITE 5	5
WHITE 7	7	WHITE 7	7
BROWN 8	8	BROWN 8	8
SHELL	BRAID	SHELL	SHELL

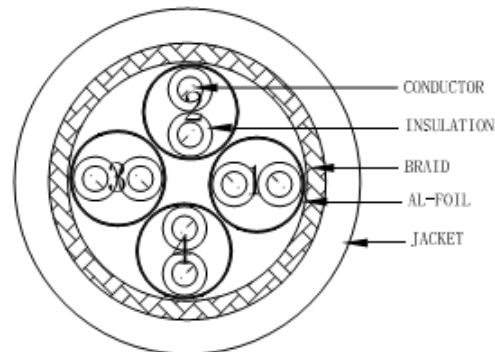

Description: Cat.6A PiMF Network Patch Cable LSOH

Connectors: RJ45 Plug Shielded Snagless, Pins 3µ"/0,2µm gold plated, with LINDY®
 Cable Type: Category 6A S/FTP PiMF, 27 AWG (7/0.135cu), 4 Pairs, 8 Core, Stranded
 Certificated: UL No. E321484 AVM 2835, EIA/TIA 568B.2, RoHS 2.0 compliant
 Colour: grey (Colour code: cool grey 1C)

Packaging: LINDY Polybag (sizes above) and barcode label

Alterations	Issue	Date	BY	GB	DE
	0	27.1.14	ML		rb
Packaging Update	1	30.06.14	ML		ML
Connector Data updated (from 8µm to 0,2µm)	2	19.03.15	ML		ML

Drawn By: ML, 23.01.2014

All connectors viewed from front

The following tolerances apply to overall dimensions -0% +10%

© LINDY Electronics Ltd., LINDY-Elektronik GmbH and LINDY group. All rights reserved.

GB Tel: +44 1642-754000 | DE Tel: +49 621-47-005-0
 Fax: +44 1642-754027 | Fax: +49 621-47-005-990

