


Product datasheet

Specifications

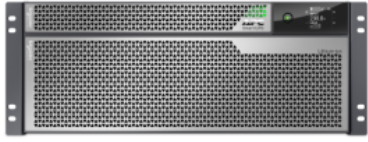

APC Smart-UPS Ultra On-Line Lithium ion, 10KVA/10KW, 4U Rack/ Tower, 230V

SRTL10KRM4UI

Overview

Lead time

Main

Main Input Voltage 220...240 V

Other Input Voltage 220...240 V

Rated power in W 10000 W

Rated power in VA 10000 VA

Number of rack unit 1U

Number of cables 1

Battery type Li-Ion (Lithium-Ion)

Provided equipment RJ45 cable

Batteries & Runtime

Battery recharge time 1.5 h

Battery voltage 180 V

Battery charger power 1200 W rated

General

Redundant No

Physical

Colour Silver grey

Height 432 mm

Width 731 mm

Depth 175 mm

Mounting mode Rack-mounted with kit

USB compatible Yes

Input

Network frequency 50/60 Hz

Output

Maximum configurable power in W	10000 W
Output frequency	50/60 Hz +/- 3 Hz sync to mains
UPS type	Double conversion online
Wave type	Sine wave
Maximum configurable power in VA	10000 VA

Conformance

Standards	UL 1778
-----------	---------

Environmental

Ambient air temperature for operation	0...40 °C
Relative humidity	0...95 % non-condensing
Operating altitude	0...10000 ft
Ambient air temperature for storage	-15...45 °C
Storage Relative Humidity	0...95 % non-condensing
Storage altitude	0.00...15240.00 m
Acoustic level	55 dB
IP degree of protection	IP20

Communications & Management

Control panel	Multifunction LCD status and control console
Alarm	Audible and visible alarms : prioritized by severity
Emergency power off	Yes

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	49.6 cm
Package 1 Width	62.5 cm
Package 1 Length	95.8 cm
Package 1 Weight	60 kg
SCC14	10731304578502 20731304578509 30731304578506 40731304578503 50731304578500 60731304578507 70731304578504 80731304578501

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China RoHS Regulation	China RoHS declaration

RoHS exemption information Yes

Contractual warranty

Warranty 5 years repair or replace

Recommended replacement(s)