

FEATURE HIGHLIGHTS

- LASERPROJECTOR
- 6000 ANSI LUMENS
- 360° PROJECTION
- 1,65X ZOOM
- 5 YEARS OR 20.000 HOURS WARRANTY
- 96% REC.709



Product Specifications


Articlenumber	9HJL677.26E	
EAN Code	471 8755 07813 2	
Type	DLP Single 0.67" WUXGA	
DMD Type	DC3 DMD Chip	
Resolution	1920 x 1200 pixels	
Brightness	6.000 ANSI Lumens	
Contrast Ratio*	3.000.000:1	
Display Color	1,07 Billion Colors	
Color value	96% Rec.709	
Aspect Ratio	Native 16:10 (5 aspect ratio selectable)	
Projection Size	30" ~ 300"	
Throw Ratio	1.15~1.9	
Zoom Ratio	1.65x	
Lens Shift	Vertical: +10% / -2% / Horizontal: +/- 2.5 %	
Light Source Type	BlueCore Laser	
Light Source Life **	Normal 20.000 / Eco 38.000 / Dimming mode 70.000 Stunden	
Keystone Adjustment	Vertical: ± 30 Grad, Horizontal: ± 30 Grad	
Resolution Support	VGA(640 x 480) to WUXGA(1920 x 1200)	
Horizontal Frequency	15 ~ 102KHz	
Vertical Scan Rate	23 ~ 120 Hz	
Compatibility	480i, 480p, 576i, 567p, 720p, 1080i, 1080p / NTSC, PAL, SECAM	
Built-in Speaker	2x 5 Watt	
Security	Security Bar, Kensington Lock anti-theft device	
Feature	96% Rec.709, Blank to True Black, 4K compatible, 360 degree and portrait projection, Corner Fit, Custom light source mode (light output setting), Dustproof optical laser unit, Continuous operation, FW upgrade via LAN, Blanking out	
Dimensions (W x H x D)	454 x 360 x 164 mm	
Weight	10,7 kg	
Power Supply	100 ~ 240V AC	
Power Consumption	530W/500W/330W	
Standby Power Consumption	Normal < 0,5 Watt / Network < 2Watt	
Audible Noise	38/34 dBA	
Temperature	0 ~ 40°C	
On-Screen Display Languages	Arabic / Bulgarian / Croatian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hindi / Hungarian / Italian / Indonesian / Japanese / Korean / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Simplified Chinese / Spanish / Swedish / Turkish / Thai / Traditional Chinese / Vietnam (30 languages)	
Accessories	Standard	Optional
	installation guide Regulatory Declaration Remote Control RC01 (5JJAD06.001) 2x AAA Battery VGA cable (1.8m) power cords Guarantee card (depending on region)	Wireless Dongle - QCast (5JJCK28.X01) Instashow WDC10 (9HJF878.N4X) Ceiling Mount -CMG3(5JJAM10.001) Filter (5JJL714.001) 3D Glasses (5JJ9H25.002)
Guarantee	5 years or 20,000 hours warranty (whichever comes first)	

* LightSource lifetime results vary depending on environmental conditions and usage. Actual product features and specifications may vary without prior notice. announcement will be changed.

** All related optical values are measured through the standard lens ** Light source life depends on environmental conditions and light mode used. Model changes and errors excepted.

* Contrast is measured using the default Full On Full Off value.

Input and output Terminals

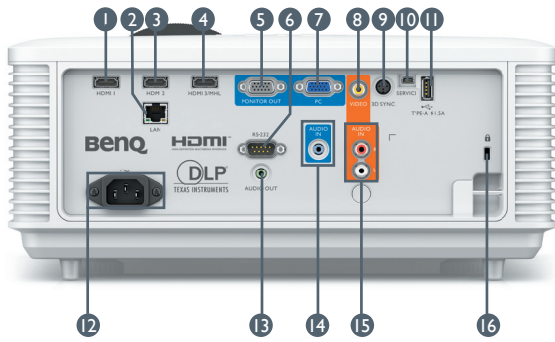



- 1 HDMI 1
- 2 HDMI 2.0
- 3 LAN Port (RJ45 for Network Control)
- 4 HDMI 3 / MHL
- 5 Monitor Output (D-sub 15pin, Female)
- 6 DVI-D Input
- 7 PC 1 Input (D-sub 15pin, Female)
- 8 Composite Video (RCA)
- 9 3D Sync Output
- 10 Service
- 11 USB Type A (1.5A)
- 12 I2V Trigger
- 13 Audio Output (mini Jack)
- 14 Audio Input (mini Jack)
- 15 RCA Audio L / R Input / L / R Output
- 16 DVI-D Input

Dimensions



Distance Chart

Lens		Throw Ratio						
Diagonal	Image Width		Image Height		Offset (A)		O	
(inch) (m)	(inch) (m)	(inch) (m)	(inch) (m)	(inch) (m)	Wide / Tele	Wide / Tele	(inch) (m)	(inch) (m)
80 2.03	68 1.72	42 1.08	2,1 0,054	23,3 0,592	2,1	0,054	23,3	0,592
100 2,54	85 2,15	53 1,35	2,6 0,067	29,1 0,740	2,6	0,067	29,1	0,740
120 3,05	102 2,58	64 1,62	3,2 0,081	35 0,888	3,2	0,081	35	0,888
150 3,81	127 3,23	79 2,02	4,0 0,101	43,7 1,111	4,0	0,101	43,7	1,111
200 5,08	153 3,88	95 2,42	5,3 0,135	58,3 1,481	5,3	0,135	58,3	1,481
300 7,62	254 6,46	159 4,04	7,9 0,202	87,4 2,221	7,9	0,202	87,4	2,221
400 10,16	339 8,62	212 5,38	10,6 0,269	116,6 2,962	10,6	0,269	116,6	2,962

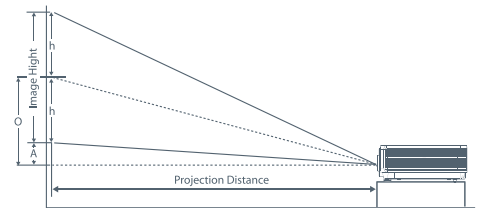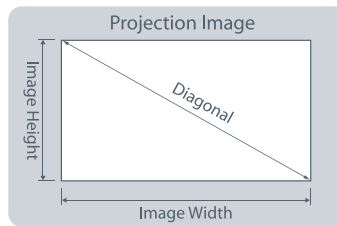

Ceiling Mount Chart

