

# ThinkEdge SE350 V2

## Purpose-built, Edge server



### Purpose Built Edge Server for Compute & Storage

Today, remote locations are forced to make a choice between underpowered IOT gateways and PCs, or overpowered and non-rugged datacenter centric servers. Now they have an option—a right-sized compact compute and storage server designed specifically to meet the needs of remote locations.

The Lenovo ThinkEdge SE350 V2 is an Intel® Xeon® D-2700-based 1U height, half-width, and short-depth Edge server that can go anywhere. It can be hung on a wall, ceiling, standalone on a desk, or mounted in a rack. This rugged Edge server can handle temperatures from 0-55°C as well as tolerance to locations with high-dust and vibration.

The SE350 V2 is designed to virtualize traditional IT and OT applications as well as new transformative Edge computing systems, providing the processing power, storage, and networking techniques required for today's Edge workloads.

### Secure, Connected and Reliable

At Lenovo, security begins with design and continues through supply chain, delivery, and the full lifecycle of the system.

The SE350 V2 equips ThinkShield security with cybersecurity capabilities with key encrypted storage and secured bios, and physical security capabilities such as a locking bezel, intrusion and tamper protection mechanisms.

The SE350 V2 provides numerous connectivity options with 2.5G industry TSN networking and 1G/10G/25G wired connection abilities. Reliability features such as redundant boot and data drives, high temperature components and support for hyperconverged clustering keep critical Edge workloads running.

### Agility and Remote Manageability

It is costly and time consuming to send IT staff to remote sites. The SE350 V2 features XClarity Controller, an enterprise-grade embedded management engine. It also supports XClarity Administrator, which enables IT managers to efficiently maintain server, storage, and networking infrastructure and accelerate services provisioning.

In addition to a dedicated wired networking management port, the SE350 V2 can deliver management switchable so IT managers can perform updates, management tasks, and access sites from 1G/2.5G/10G/25G traffic port.

Lenovo

## Specifications

Form Factor	1U height, half width edge server; Height: 41.7mm, Width: 209mm, Depth: 384mm
Processor	1-socket Intel® Xeon® D-2700, up to 16 cores
Memory	Up to 256GB in 4x slots, using 64GB DIMMs; 3200MHz TruDDR4
Storage Options	<ul style="list-style-type: none"> <li>• 2x M.2 2280 NVMe boot drives + 4x 2.5" 7mm HS NVMe/SATA data storage drives               <ul style="list-style-type: none"> <li>◦ 2x M.2 2280 NVMe boot drives + 2x 2.5" 15mm HS NVMe/SATA data storage drives</li> </ul> </li> <li>• SED, high temperature, high capacity, and high endurance drive options</li> <li>• Optional encryption key deletion on tamper or theft detection</li> </ul>
RAID Support	<ul style="list-style-type: none"> <li>• RAID 0, 1 for boot drives</li> <li>• RAID 0, 1, 5, 10 for data drives</li> </ul>
Mounting Options	<ul style="list-style-type: none"> <li>• Single node mounting options for desktop, VESA, DIN, wall, or ceiling</li> <li>• 1U2N Enclosure for two nodes side-by-side and internal power supply. Depth: 476.1mm, Height: 1U</li> <li>• 1U2N Enclosure for two nodes side-by-side and 4x external power supplies. Depth: 771.1mm, Height: 1U</li> <li>• 2U2N Short Depth Enclosure for two nodes sides by side + 4x power supplies: Depth: 476.1mm, Height: 2U</li> <li>• Locking bezels and dust filter options</li> </ul>
Power	<ul style="list-style-type: none"> <li>• Dual-redundant external power supplies 300W 115V/230V AC</li> <li>• Dual DC supply: 12V-48VDC</li> <li>• Single internal AC power supply: 500W</li> </ul>
Network Interfaces (Wired)	<ul style="list-style-type: none"> <li>• 4x 10GbE/25GbE SFP+/SFP28</li> <li>• 2x 2.5GbE TSN</li> <li>• 1GbE RJ45 management port; or</li> <li>• 4x 1GbE</li> <li>• 2x 2.5GbE TSN</li> <li>• 1GbE RJ45 management port</li> </ul>
Accelerators and PCIe Expansion	<ul style="list-style-type: none"> <li>• N/A</li> </ul>
I/O	<ul style="list-style-type: none"> <li>• Front: 2x USB 3.2 Gen 1 (Type-A) + 1x BMC USB 2.0 (Type-C), 1x Display USB-C (USB 2.0 + Display Port (video) / USB 3.2 Gen 1 auto switch), 1x BMC serial RJ45 management port</li> <li>• Rear: 1x RJ45 Console Serial Port (can be disabled)</li> </ul>
Systems Management	Lenovo XClarity Administrator with mobile option
Environmental	Extended operating temperature of 0-55°C, up to 40G shock & 1.91Grms vibration, IEC 60068, optional dust filter
Security	<ul style="list-style-type: none"> <li>• ThinkShield Key Vault secure management with motion and intrusion tamper protection</li> <li>• Optional Key Vault SED encrypted storage for boot and data drives</li> <li>• Lenovo Trusted Supplier Program, Secure boot, and Smart USB Protections</li> <li>• Optional Kensington keyed lock compatible chassis</li> <li>• Nationz TPM 2.0 for customers in China</li> <li>• Cable locking bezel</li> </ul>
Operating Systems	Microsoft Windows Server, SLES, Ubuntu, RHEL, VMware ESXi, vSAN. Visit <a href="https://lenovopress.lenovo.com/osig">lenovopress.lenovo.com/osig</a> for details.
Limited Warranty	3-year customer replaceable unit and onsite service, next business day 9x5; optional service upgrades

## View in Augmented Reality

Scan the QR code below using your smartphone or tablet to view the server in augmented reality.




## About Lenovo

Lenovo (HKSE: 992) (ADR: LNVGY) is a US\$62 billion revenue global technology powerhouse, ranked #171 in the Fortune Global 500, employing 77,000 people around the world, and serving millions of customers every day in 180 markets. Focused on a bold vision to deliver smarter technology for all, Lenovo is expanding into new growth areas of infrastructure, mobile, solutions and services. This transformation is building a more inclusive, trustworthy, and sustainable digital society for everyone, everywhere.

## For More Information

To learn more about the ThinkEdge SE350 V2, contact your Lenovo representative or Business Partner, or visit [lenovo.com/systems/servers](https://lenovo.com/systems/servers). For more details consult the SE350 V2 Product Guide, [lenovopress.lenovo.com/lp1676](https://lenovopress.lenovo.com/lp1676).

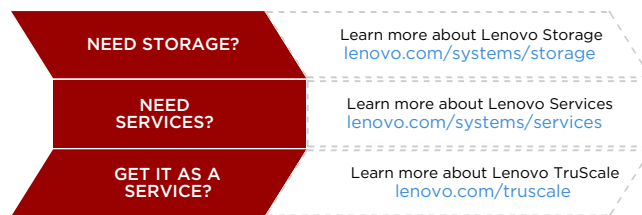

© 2025 Lenovo. All rights reserved.

**Availability:** Offers, prices, specifications and availability may change without notice. Lenovo is not responsible for photographic or typographic errors. **Warranty:** For a copy of applicable warranties, write to: Lenovo Warranty Information, 1009 Think Place, Morrisville, NC, 27560. Lenovo makes no representation or warranty regarding third-party products or services. **Trademarks:** Lenovo, the Lenovo logo, ThinkEdge®, ThinkShield®, and XClarity® are trademarks or registered trademarks of Lenovo. Intel® and Xeon® are trademarks of Intel Corporation or its subsidiaries. Microsoft®, Windows Server®, and Windows® are trademarks of Microsoft Corporation in the United States, other countries, or both. Other company, product, or service names may be trademarks or service marks of others. Document number DS0161, published November 7, 2023. For the latest version, go to [lenovopress.lenovo.com/ds0161](https://lenovopress.lenovo.com/ds0161).