


DATASHEET

Duplex Jumper LC-LC 50/125 μ , OM2, LSZH, armored, grey, 3.0mm, 2m

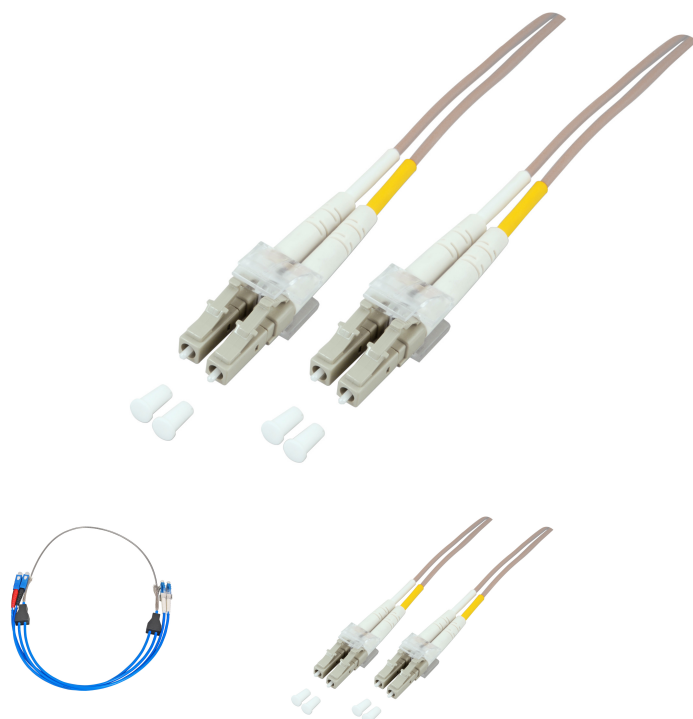

General data

SOLID!

Crush-resistance = 30.000 N per square centimeter
equals 3 tons / cm²

Stainless steel spiral coil and stainless steel braid for high mechanical protection

Non-crushable, shock-proof, bend-resistant

Very high flexibility

High lateral pressure and tensile resistance

Allgemeine Daten

Connector colour 2	beige
APC-version	False
Number of fibres	2
Material outer sheath	LSZH
Cable type	I-V(ZN) H
Anti-kink sleeve	put-on
Colour outer sheath	grey
Category	OM2

This datasheet was created automatically on 11-05-2023 . Technical changes reserved.



DATASHEET

Duplex Jumper LC-LC 50/125 μ , OM2, LSZH, armored, grey, 3.0mm, 2m

Connector colour 1	beige
--------------------	-------

Mechanische Eigenschaften

Cable Ø	3.0 mm
---------	--------

Kabelaufbau

Type of connector connection 2	LC-Duplex
Fibre type	Multi mode 50/125
Cable Construction	Duplex
Type of connector connection 1	LC-Duplex

Kabelmantel

Flame retardant	According to EN 50265-2-1
Halogen free (according to EN 50267-2-3)	True

Umgebungsbedingungen

Storage Temperature	-20 - 85 °C
Operating Temperature	-20 - 75 °C

Übertragungstechnische Eigenschaften

Quality class multimode	A/1 according to IEC-61753-222-2
-------------------------	----------------------------------

Normen, Zulassungen, Zertifizierungen

Cabling standard	EN-50173-1
Cable Conform to Standard	IEC 60793-2

Available variants

ArtNr.	Bezeichnung	Length	Längentoleranz
06504.2	Duplex Jumper LC-LC 50/125 μ , OM2, LSZH, armored, grey, 3.0mm, 2m	2.0 m	±5 %

This datasheet was created automatically on 11-05-2023 . Technical changes reserved.

