


DATASHEET

Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm²

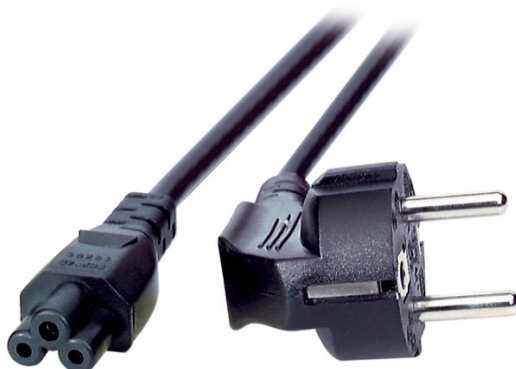

General data

2.5 A / 250 V VDE tested
Suitable for Germany, Belgium, France and further

Allgemeine Daten

Number of cores	3
Spiralized cable	True
Colour outer sheath	black
With cord switch	True
Material outer sheath	Polyvinyl chloride (PVC)
Halogen free	False

Mechanische Eigenschaften

Connection 2	C5 Mickey Mouse female
Connection 1	Socket outlet with protective contact, right-angled

Kabelmantel

Temperature resistance	0 - 70 °C
Oil resistant (according to EN 60811-404)	False

Elektrische Eigenschaften

Protective conductor	True
Nominal voltage	250 V

This datasheet was created automatically on 06-12-2022 . Technical changes reserved.



DATASHEET

Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm²

Normen, Zulassungen, Zertifizierungen

Oil resistant (acc. EN 60811-2-1) True

Available variants

ArtNr.	Bezeichnung	Colour outer sheath	Length	With protective conductor	Leiternennquerschnitt	Außendurchmesser ca.
EK552.1.8V2	Power Cable CEE7/7 90° - C5 180°, Black, 1.8 m, 3 x 0.75 mm ²	black	1.8 m	True	0,75 mm ²	6,5 mm
EK552.3V2	Power Cable CEE7/7 90° - C5 180°, Black, 3.0 m, 3 x 0.75 mm ²	black	3.0 m	True	0,75 mm ²	6,5 mm
EK552.5V2	Power Cable CEE7/7 90° - C5 180°, Black, 5.0 m, 3 x 0.75 mm ²	black	5.0 m	True	0,75 mm ²	6,5 mm

This datasheet was created automatically on 06-12-2022 . Technical changes reserved.

