Technical Specifications

HP Series 7 Pro 37.5 inch WQHD+ Thunderbolt 4 Monitor - 738pu




Front

1. Power Button

2. Power LED

Technical Specifications

HP Series 7 Pro 37.5 inch WQHD+ Thunderbolt 4 Monitor - 738pu

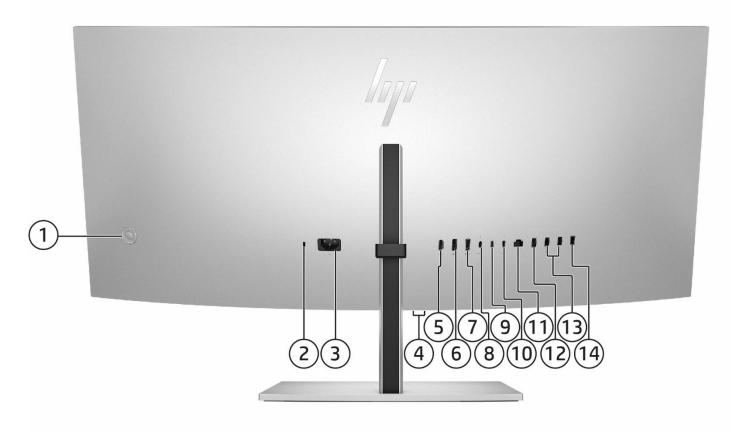

1. Joypad OSD button

- 2. Security Cable Slot
- 3. Power Connector
- **4.** USB Type-C® 10Gbps signaling rate (charging). (Right) USB Type-A 10Gbps signaling rate (dedicated port for keyboard for KVM switch) (Left)
- 5. HDMI 2.0
- **6.** DisplayPort™ 1.4
- **7.** DisplayPort[™] 1.4 out port

Back

- **8.** 1 USB Type-C[®] 10Gbps signaling rate (up to 65W USB Power Delivery, Alt Mode DisplayPort™ 1.4)
- **9.** 1 Thunderbolt[™] 4 Out port for daisy chain (charging)
- 10. 1 Thunderbolt™ 4 40Gbps (up to 100 W USB Power Delivery, DisplayPort™ 1.4)
- **11.** RJ-45 (10/100/1000 Mbps) (Network Port)
- **12.** USB Type-A port 10Gbps signaling rate (dedicated port for Text-to-Speech Adapter)
- 13. 2 USB Type-A port 10Gbps signaling rate
- **14.** USB Type-A 10Gbps signaling rate (charging)

Technical Specifications

Model: 8K167AA, 8K167E9, 8K167AT, 8K167A5

Panel Specifications Display Size (Diagonal) 37.5" (95.3 cm) Viewable Diagonal Size 37.52" (95.29 cm)

> **Panel Technology IPS Black Curvature** 2300R **Max Refresh Rate** 60 Hz

Native Resolution WQHD+ (3840 x 1600) **Panel Bit Depth** 10 bit (8 bit + FRC)

Aspect Ratio 21:9 **Brightness (Typical)** 400 nits

HDR VESA DisplayHDR™ 400

Display Contrast Ratio (Static) 2000:1 Flicker Free Yes **Pixel Pitch** 0.23×0.23 Pixels Per Inch (PPI) 111 PPI

Display Colors Up to 1.07 billion colors supported* *Number of colors through A-FRC technology.

Backlight Lamp Life Minimum (To Half

30k **Brightness - In Hours)**

Backlight Type Edge-lit **Screen Treatment** Anti-glare **Hardness** 3H

Haze 25% 5ms GtG (with overdrive) Response Time (Typical)

Horizontal Viewing Angle 178°

(Typical Cr>10) Vertical Viewing Angle (Typical Cr>10) 178°

Panel Active Area Metric (W X H) 87.97 x 36.65 cm Panel Active Area Imperial (W X H) 34.63x14.43 in

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color sRGB 100%

Display P3 98%

Color Management Factory Color Calibrated Yes

> **Calibrated Color Presets** P3, BT.709 D65, sRGB D65

Color Space/ Subsampling Support RGB 4:4:4, YCBCR 4:4:4, YCBCR 4:2:2

RGB Channel Adjust Yes, Gain

Host software (Windows or macOS) **User Calibration Support**

External Calibration Support X-Rite i1Display Pro Standalone/ Schedulable Calibration Yes, Schedulable **Default Color Temperature** Display P3

Bezel Type Monitor Specifications 3-sided borderless

> **Color Of Stand** Black and Silver **Color Of Head** Black and Silver



Technical Specifications

Tilt -5 to +20° **Swivel** ±10° **Height Adjust Range** 150 mm

Vesa Mounting 100 mm x 100 mm (bracket included)

Security Lock Security lock-ready

Detachable Stand Yes

3/3/0 for LA, NA, EMEA, APJ Warranty

(3/3/3 in select APJ Countries)

Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution Low Blue Light

certified)

Zero Bright Dot Guarantee Yes*

> *The HP Pixel Policy allows no bright sub-pixel defects for this display. For complete details, see http://support.hp.com/us-

en/document/c00288895.

Microphone Dual Microphone with DNN noise cancellation

Speaker Output Power 4 x 3W

Management Software HP Display Manager, HP Display Center*

*Host PC requires Windows 10 and above. HP Display Center is

available on the Microsoft store.

On Screen Display (OSD)

On Screen Display

Native Resolution

Image, Color, Split Screen, Input, Audio, Power, Menu,

Management, Information WQHD+ (3840 x 1600)*

* DisplayPort™ 1.4 or HDMI 2.0 required to drive panel at its

native resolution.

The video card of the connected PC must be capable of supporting 3840 × 1600 at 60 Hz with 10-bit color using one DisplayPort™, HDMI,or USB Type-C® (DisplayPort™ alt mode),

Thunderbolt™.

The video card of the connected PC must be capable of supporting 3840 × 1600 at 60 Hz and include 1 HDMI or 1 DisplayPort™ outputs to drive the monitor at the Preferred

Mode.

Maximum Resolution

Preset Graphic Modes/Supported

Resolutions

WQHD+ (3840 x 1600 @ 60 Hz)

640 x 480 @60Hz

720 x 400@70Hz 800 x 600@60Hz 1024 x 768@60Hz 1280 x 720@60Hz 1280 x 1024@60Hz

1440 x 900@60Hz 1600 x 900@60Hz 1680 x 1050@60Hz 1600 x 1200@60Hz

1920 x 1080@60Hz 1920 x 1200@60Hz

2560 x 1440@60Hz 2560 x 1600@60Hz 3840 x 1600@60Hz

3840 x 1600@30Hz

Technical Specifications

Minimum Vertical Scan Rate30 HzMaximum Vertical Scan Rate60 HzMinimum Horizontal Scan Rate30 kHzMaximum Horizontal Scan Rate140 kHzMaximum Pixel Clock600 MHzUser Programmable ModesYes, 16

User-Assignable Function Buttons Yes, 4 (9 options)

AudioBuilt-in speakers with DTS Virtual:X™CertifiedLanguages11 (German, Simplified Chinese, Traditional Chinese,
English, Spanish, French, Italian, Japanese, Netherlands,

Brazilian Portuguese, Russian)

Connector Types DisplayPort™ 1.4 DisplayPort™ 1.4

DisplayPort™ Out 1 DisplayPort™ 1.4-out

HDMI 1 HDMI 2.0

HDCP Yes, DisplayPort™, HDMI, USB Type-C® and Thunderbolt™

1 Thunderbolt[™] 4 with USB Type-C[®] 40Gbps signaling rate (up to 100 W USB Power Delivery, DisplayPort[™] 1.4);

1 USB Type-C[®] 10Gbps signaling rate (15 W charging)

Next Active Input, Color, Split Screen (On/Off), Volume

Out-of-Band MAPT, Out-of-Band WoL, PXE Boot

USB Type-C® Video & Data Transfer

1 USB Type-C® 10Gbps signaling rate (up to 65W USB

Power Delivery, Alt Mode DisplayPort™ 1.4);

USB Type-C® Data Transfer Only

Thunderbolt™ Out 1 Thunderbolt™ 4 Out for Daisy chain (15 W charging)

USB-Type-A 5 USB Type-A 10Gbps signaling rate (1 charging with 7.5

W)

Ethernet 1 RJ-45 (10/100/1000 Mbps)

Special Features Picture-in-Picture, Picture-by-Picture Yes

Switch

Remote Manageability

User Presets 16
User Updateable Firmware Yes

KVM Switch Yes, Keyboard switch

Other Special Features

Device Bridge 2.0
Ambient Light Sensor
Single Power On
Daisy chain
Pantone validated

Internal

Power & Operating Power Supply

Specs

Power Source 100 – 240 VAC 50/60 Hz

Power Consumption- Max318 WEnergy Saving/Stand By Mode0.5 WPower Consumption - Typical62 W

Energy Star Data Operational Mode at 100 VAC 35.15 W

Operational Mode at 115 VAC35.11 WOperational Mode at 230 VAC35.54 W



Technical Specifications

EU Energy Efficiency Class (ErP LOT-5) On-mode Power Consumption for Standard Dynamic Range (SDR) ErP LOT5 Energy Efficiency Class for

Standard Dynamic Range (SDR)
On-mode Power Consumption for High

Dynamic Range (HDR)

ErP LOT5 Energy Efficiency Class for High Dynamic Range (HDR)

37.9 W

A G

75 W

J VV

d G

Operating Conditions

Operating Temperature - Celsius $5\sim35^{\circ}\text{C}$ Operating Temperature - Fahrenheit $41-95^{\circ}\text{F}$ Non-Operating Temperature - Celsius $-20-60^{\circ}\text{C}$ Non-Operating Temperature - $-4-140^{\circ}\text{F}$

Fahrenheit

Operating Humidity 20 – 80% Relative Humidity (non-condensing)

Non-Operating Humidity5~95%RHOperating Altitude Metric0~5,000mNon-operating Altitude Metric0~12,192mOperating Altitude Imperial0~16,400ftNon-operating Altitude Imperial0~40,000ft

Certifications and Compliances

Low Halogen Yes*

*External power supplies, WWAN modules, power cords, cables and peripherals excluded.

Agency Approvals and Certifications WW application

CE,CB,KC/KCC/NOM/PSB/ICE/TUV-S/ISO 9241-307/ EAC/UL/CSA/PSB/ISC/CCC/CEL/CECP/SEPA/TCO/TCO Certified Edge/Energy Star/ISC/VCCI/FCC/BSMI/Korea MEPS/Ukraine EE/Belarus EE /WEEE/GS/Low Blue

light/UAE/Ukraine/BIS/RCM Windows 11, Windows 10

Microsoft WHQL Certification ENERGY STAR® Certified EPEAT® Registered

EPEAT® Gold in United States*

*Based on US EPEAT® registration according to IEEE 1680.1-2018 EPEAT®. EPEAT® status varies by country. Visit

www.epeat.net for more information.

China Energy LabelCEL Grade 2TCO Certified EdgeYesTCO CertifiedYes

SmartWay Transport Partnership - NA

only

Yes (NA sku)

Yes

Contains Recycled Plastics

Contains Recycled Plastics 90% post-consumer recycled plastic *

*Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard.



90% recycled aluminum *

QuickSpecs

Technical Specifications

Recycled Metal

	Recycleu metat	30% recycled aldiffillulli	
		Made with 15% recycled stee	el
		*Recycled metal is expressed as	a percentage of the total weight
		of the metal according to ISO 14	
		over 25 grams.	io E r definitions for metal parts
	Recyclable Packaging (Box, packing materials)	Outside box and corrugated sustainably sourced and recy	
		*100% outer box packaging and sustainably sourced certified an	l corrugated cushions made from drecycled fibers.
S		Metric	<u>Imperial</u>
Unit Product/Package	Product Dimensions	89.44 x 26.69 x 58.1 cm	35.21 x 10.51 x 22.87 in
Specifications	(Unpacked with stand) (W x D x H)	03.44 X 20.03 X 30.1 Cm	33.21 × 10.31 × 22.07 III
Specifications	•	105 22 6 52 7	41 72 0 0 20 75 :-
	Product Dimensions	106 x 22.6 x 52.7cm	41.73 x 8.9 x 20.75 in
	(Packed) (W x D x H)		
	Display Head Dimensions	89.44 x 10.84 x 39.69 cm	35.21 x 4.27 x 15.63 in
	(Unpacked without stand) (W x D x H)		
	Base Area Footprint	320 x 235 mm	12.60 x 9.25 in
	(w x d mm)		
	Bezel Measurements	Top: NA	Top: NA
		Sides: NA	Sides: NA
		Bottom: 18.69mm	Bottom: 0.74in
	Product Weight	12.25 kg	27.01 lb
	(Unpacked with stand)		
	Product Weight	18.9 kg	41.7 lb
	(Packed)	-	
	Product Weight	9.72 kg	21.43 lbs
	(Head Only)	•··· = ···g	
Dallas Information	Pallat Birranaiana	Clia Chasta 1150 - 1000 -	Cli- Chart 45 20 : 42 52 :
Pallet Information	Pallet Dimensions	Slip Sheet: 1150 x 1080 x	Slip Sheet: 45.28 x 42.52 x
	(L x W x H mm)	2121 mm (40'ft& 40'HQ) Pallet: 1150 x 1080 x 2245 mm (40'ft)	83.5 inch (40'ft& 40'HQ) Pallet: 45.28 x 42.52 x 88.39 inch (40'ft)
	Pallet Total Weight	Slip Sheet: 385.2 kg (40'ft&40'HQ)	Slip Sheet: 849.2 lb (40'HQ) Pallet: 875.7 lb (40'ft)
	Dellet Levere	Pallet: 397.2 kg (40'ft)	
	Pallet Layers	4 layers	
	Pallet Product per Layer	5 sets	
	Total Products per Pallet	20 sets	
	Container Load, 20-Foot	200 sets (Slip Sheet and Pall	
	Container Load, 40-Foot	440 sets (Slip Sheet and Pall	et)
	Container Load, 40-Foot HighQ	440 sets (Slip Sheet and Pall	et)
What's in the box?	AC power cord (1.83m) 5.9ft HDMI 2.0 cable (1.8m) 5.9 ft (Selected SK USB 3.1 C-A cable (1.8m) (Selected SKUs) DisplayPort™ 1.4 cable (1.8m) (Selected	oft (Selected SKUs) (Selected SKUs) .8m) (Selected SKUs)	



Thunderbolt™ cable (1m)

Quick Setup Poster Color calibration report

Warranty

Technical Specifications

VESA Mount Adapter

User Guide and Warranty Languages **User Guide Languages**

Warranty Languages

Arabic, Bahasa Indonesia, Bulgarian, Chinese-S, Chinese-T, Czech, Danish, Dutch, English, Estonian, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Kazakh, Korean, Latvian, Lithuanian, Norwegian, Polish, Portuguese (Brazilian), Portuguese (Iberian), Romanian, Russian, Serbian, Slovak, Slovenian, Spanish, Swedish, Thai, Turkey, Ukrainian English US (EN), English AP (EN-AP), English LA (EN-LA), English UK (EN-GB), Arabic (AR) -17x, Bahasa Indonesia (ID), Bosnian (BS), Bulgarian (BG), Chinese-S (CN), Chinese-T (TW), Croatian (HR), Czech (CS), Danish (DA), Dutch (NL), Estonian (ET), Finnish (FI), French Canadian (FC), French European (FR), German (DE), Greek (EL), Hebrew (HE), Hungarian (HU), Italian (IT), Japanese (JA), Kazakh (KK), Korean (KO), Latvian (LV), Lithuanian (LT), Norwegian (NO), Polish (PL), Portuguese, Brazilian (BR), Portuguese, Iberian (PT), Romanian (RO), Russian (RU), Serbian (SR), Slovak (SK), Slovenian (SL), Spanish, Castilian (ES-ES), Spanish, Latin America (ES-MX), Swedish (SV), Thai (TH), Turkish (TR), Ukrainian (UK), Vietnamese (VI)



Technical Specifications

ENVIRONMENTAL DATA Eco-Label Certifications &	This product has received or is in the process of being certified to the following approvals ar				
declarations	may be labeled with one or more of these marks:				
	IT ECO declaration				
	US ENERGY STAR®				
	US Federal Energy Mana	agement Program (FEMP)			
	 EPEAT® Gold registered in the United States. See http://www.epeat.net for registration status in your country. TCO or TCO Certified Edge 				
	China Energy Conservat China State Environment	ion Program (CECP) Ital Protection Administration (CEDA)		
	 China State Environmen Taiwan Green Mark 	ital Protection Administration (SEPA)		
	Korea Eco-label				
	Japan PC Green label*				
Sustainable Impact	Product Carbon Footpri				
Specifications	80% ITE – derived close				
	87.7% post-consumer r	ecycled plastic			
	 Low halogen Outside Box and corrugated cushions are 100% sustainably sourced and recyclable 				
	 Molded Paper Pulp Cushion inside box is 100% sustainably sourced and recyclable. 				
	Recycled Plastic cushions				
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data for the Notebook model is based on a "Typically Configured Notebook".				
Energy Consumption (in accordance with US ENERGY					
STAR® test method)	115VAC, 60Hz	230VAC, 50Hz	100VAC, 50Hz		
Normal Operation (Short idle)	35.11W	35.54 W	35.14W		
Normal Operation (Long idle)	35.11W	35.54 W	35.14 W		
Sleep	0.83 W	0.85 W	0.83 W		
Off	0.21 W	0.23 W	0.21W		
	NOTE:				
	Energy efficiency data listed is for an ENERGY STAR® compliant product if offered within the				
	model family. HP computers marked with the ENERGY STAR® Logo are compliant with the applicable U.S. Environmental Protection Agency (EPA) ENERGY STAR® specifications for				
	applicable U.S. Environmental Pi	otection Agency (EPA) ENERGY	STAR® specifications for		
	applicable U.S. Environmental Pr computers. If a model family doe		·		
	computers. If a model family doe energy efficiency data listed is fo	es not offer ENERGY STAR® com or a typically configured PC feat	pliant configurations, then curing a hard disk drive, a hig		
	computers. If a model family doe	es not offer ENERGY STAR® com or a typically configured PC feat	pliant configurations, then curing a hard disk drive, a hig		
-	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a M	es not offer ENERGY STAR® com or a typically configured PC feat licrosoft Windows® operating sy 230VAC, 50Hz	apliant configurations, then curing a hard disk drive, a hig stem 100VAC, 50Hz		
Normal Operation (Short idle)	computers. If a model family doe energy efficiency data listed is for efficiency power supply, and a M 115VAC, 60Hz 120.1 BTU/hr	es not offer ENERGY STAR® com or a typically configured PC feat licrosoft Windows® operating sy 230VAC, 50Hz 121.5 BTU/hr	upliant configurations, then curing a hard disk drive, a hig ystem 100VAC, 50Hz 121.5 BTU/hr		
<u>-</u>	computers. If a model family doe energy efficiency data listed is fo efficiency power supply, and a M	es not offer ENERGY STAR® com or a typically configured PC feat licrosoft Windows® operating sy 230VAC, 50Hz	apliant configurations, then curing a hard disk drive, a higher stem		
•	computers. If a model family doe energy efficiency data listed is for efficiency power supply, and a M 115VAC, 60Hz 120.1 BTU/hr	es not offer ENERGY STAR® com or a typically configured PC feat licrosoft Windows® operating sy 230VAC, 50Hz 121.5 BTU/hr	upliant configurations, then curing a hard disk drive, a hig ystem 100VAC, 50Hz 121.5 BTU/hr		



level is attained for one hour.

*NOTE: Heat dissipation is calculated based on the measured watts, assuming the service

Technical Specifications

Longevity and Upgrading	y and Upgrading This product can be upgraded, possibly extending its useful life by several years.		e by several years.	
zongevity and opgraums	Upgradeable features and/or components contained in the			
	opgradeable realitates and or components contained in the			
	Spare parts are available throughout the warranty period and or for up to "5" years after the end of production.			
 * This product is in compliance with the Restrictions of Hazardous Suldirective - 2011/65/EC. 		Hazardous Substances (RoHS)		
	Equipment (WEEE) Directive – 2002/96/EC.			
	•	This product is in compliance with California Proposition 65 (State of California; Safe		
-		king Water and Toxic Enforcement Act of 1986).		
	• This	product is in compliance with the IEEE 1680 (EPE	AT) standard at the Gold level,	
	see	www.epeat.net		
		tics parts weighing over 25 grams used in the pro	duct are marked per ISO11469	
		ISO1043.		
	• This	product is 95.7% recycle-able when properly disp	osed of at end of life.	
Packaging Materials	External:	PAPER/Corrugated	5455 g	
		PAPER/Molded Pulp	50 g	
		PAPER/Paper	35 g	
	Internal:	PLASTIC/Polyethylene Expanded – EPE	160 g	
	The plastic	packaging material contains at least 60% recycled	content.	
	The corrugated paper packaging materials contains at least 0% recycled con		% recycled content.	
RoHS Compliance	HP Inc. complies fully with materials regulations. We were among the first companies to extend the restrictions in the European Union (EU) Restriction of Hazardous Substances (RoHS) Directive to our products worldwide through the HP GSE. HP has contributed to the development of related legislation in Europe, as well as China, India, and Vietnam.			
	We believe the RoHS directive and similar laws play an important role in promoting industry-wide elimination of substances of concern. We have supported the inclusion of additional substances—including PVC, BFRs, and certain phthalates—in future RoHS legislation that pertains to electrical and electronics products.			
	We met our voluntary objective to achieve worldwide compliance with the new EU RoHS			
	requirements for virtually all relevant products by July 2013, and we will continue to extend the scope of the commitment to include further restricted substances as regulations continue to evolve.			
	To obtain a c	opy of the HP RoHS Compliance Statement, see H	P RoHS position statement.	
Material Usage	This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at			
	http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):			
	• Cert	estos ain Azo Colorants ain Brominated Flame Retardants – may not be us stics	sed as flame retardants in	



Technical Specifications

Technical Specifications	
	 Cadmium Chlorinated Hydrocarbons Chlorinated Paraffins Bis(2-Ethylhexyl) phthalate (DEHP) Benzyl butyl phthalate (BBP) Dibutyl phthalate (DIBP) Diisobutyl phthalate (DIBP) Formaldehyde Halogenated Diphenyl Methanes Lead carbonates and sulfates Lead and Lead compounds Mercuric Oxide Batteries Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user. Ozone Depleting Substances Polybrominated Biphenyls (PBBs) Polybrominated Biphenyl Ethers (PBBEs) Polybrominated Biphenyl Oxides (PBBOs) Polychlorinated Biphenyl (PCB) Polychlorinated Terphenyls (PCT) Polyvinyl Chloride (PVC) — except for wires and cables, and certain retail packaging has been voluntarily removed from most applications. Radioactive Substances Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
	- Thought IIII (1517), Thiphenyt IIII (1117), Thought IIII Oxide (1510)
Packaging Usage	HP follows these guidelines to decrease the environmental impact of product packaging:
	 Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials. Eliminate the use of ozone-depleting substances (ODS) in packaging materials. Design packaging materials for ease of disassembly. Maximize the use of post-consumer recycled content materials in packaging materials. Use readily recyclable packaging materials such as paper and corrugated materials. Reduce size and weight of packages to improve transportation fuel efficiency. Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
End-of-life Management and Recycling	HP offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.
	The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers . These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Technical Specifications

HP, Inc. Corporate	For more information about HP's commitment to the environment:		
Environmental Information			
	Global Citizenship Report		
	http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html		
	Eco-label certifications		
	http://www8.hp.com/us/en/hp-information/environment/ecolabels.html		
	ISO 14001 certificates:		
	http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=c04755842		
	and		
	http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/cert.pdf		
footnotes	Percentage of ocean-bound plastic contained in each component varies by product		
	 Recycled plastic content percentage is based on the definition set in the IEEE 1680.1-2018 standard. 		
	 External power supplies, WWAN modules, power cords, cables and peripherals excluded. 		
	 100% outer box packaging and corrugated cushions made from sustainably sourced certified and recycled fibers. 		
	Fiber cushions made from 100% recycled wood fiber and organic materials.		
	Plastic cushions are made from >90% recycled plastic		



HP Series 7 Pro 37.5 inch WQHD+ Thunderbolt 4 Monitor - 738pu

QuickSpecs

Technical Specifications

© Copyright 2024 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log		
	V1 to V2	
	V2 to V3	
	V3 to V4	

