

AI-PC BAREBONE
XPC nano
NT10H5

Intel® Core™ Ultra 5 Processor 125H

AI-POWERED PERFORMANCE BOOSTER IN NANO DESIGN

The Shuttle nano Barebone NT10H Series is designed as a compact, 1-litre nano-style mini-PC with enhanced features and efficiency for multitasking and AI workloads. Equipped with Intel® Core™ Ultra processors with integrated Intel® Arc™ graphics and AI Boost NPU, it effortlessly handles demanding graphics processing. It supports output to four 4K/UHD displays and offering comprehensive connectivity including dual USB4, dual 2.5G Intel® LAN, and PCIe 4.0 SSD slot. This powerhouse is ideal for gaming, AI inference, image processing, and multimedia content creation tasks, delivering powerful performance at an affordable price point, empowering both everyday tasks and professional projects with outstanding results.



- 1L
1-LITRE
AI-PC
- CPU
Intel Core Ultra
with NPU
- Supports
96GB DDR5
- M.2
M.2 SSD
Support
- 4X
4x DISPLAY
Support
- 2x HDMI 2.0
- 2x USB4
with DP 1.4
- 5x USB 3.2
1x USB 2.0
- Dual Intel
2.5G LAN
- SD CARD
READER
- VESA MOUNT
included
- 24/7
24/7
Support

NANO DESIGN

- Nano plastic chassis, black ■ Dimensions: 132 x 143 x 55 mm (WLH), 1.04 Litre (height incl. feet: 57.8 mm) ■ Weight: 800g net
- Operating temperature: 0~40 °C at 10-90 %RH (non-condensing)
- VESA mount included, supports 75x75 and 100x100 mm

OPERATING SYSTEM

- An operating system is not included
- Supports Windows 11 and Linux (64-bit)
- Windows driver download: go.shuttle.eu/NT10H (no DVD included)

PROCESSOR

- Intel® Core™ Ultra 5 Processor 125H, code name "Meteor Lake-H"
- Intel 4 process, cTDP: 20-54W (configurable)
- 4x P-Cores, 8x E-Cores, 2x Low-Power E-Cores, 18 MB L3 Cache
- NPU with 11.5 TOPS AI performance (NPU+CPU+GPU: 34 TOPS)
- Dual fan heat-pipe cooling system for optimized air-flow: 80 mm CPU fan and 60 mm chassis fan

GRAPHICS ENGINE

- Intel® Arc™ graphics accelerator with 7 Xe cores
- supports four independent UHD displays at 60 Hz

RAM MEMORY SUPPORT

- 2x 262-pin SODIMM slot ■ Supports up to 2x 48 GB DDR5-5600

M.2 SLOTS AND CARD READER

- 1x M.2-2280M slot supports one SSD card with PCIe Gen 4 x4 NVMe
- 1x M.2-2230E slot supports M.2 WLAN card (not included), two internal antennas are already pre-installed
- 1x SD Card Reader (left side)

CONNECTORS

- 2x HDMI 2.0 ■ 2x USB4 Type-C (max. 40 Gbps) supports DisplayPort 1.4 and 3A PD ■ 5x USB 3.2 Gen2 Type-A (max. 10 Gbps) ■ 1x USB 2.0
- 2x 2.5G LAN (Intel 226V) ■ 3.5 mm Audio Combo port ■ DC input 19 V
- Power Button with Power LED Indicator

POWER ADAPTER

- 120W power adapter (DC: 19V/6.32A, 3-pin AC plug with earth contact)

EMC & SAFETY

- EMI: CE, FCC, BSMI
- Safety: CB IEC62368, cTUVus (UL 62368), BSMI



MODELS OF THE NT10H SERIES

Product	Intel Processor	P-Cores / Threads	E-Cores	Low Power E-Cores	L3 Cache	Intel Arc Graphics	Base TDP	Config. TDP (Turbo TDP)	UPC Code
NT10H5	Core Ultra 5 – 125H	4 / 8	8	2	18 MB	7 Xe Cores	28 W	20/28/54 W	887993007663
NT10H9	Core Ultra 9 – 185H	6 / 12	8	2	24 MB	8 Xe Cores	45 W	35/45/54 W	887993007687


PRODUCT FEATURES



Quad 4K/UHD Display support

NT10H5 features four digital video outputs: 2x HDMI and 2x DisplayPort 1.4 via USB-C.

This allows for the connection of four independent displays at 4K resolution (3840 x 2160), leveraging hardware decoding and encoding for popular video codecs including AV1 and H.265. Using four displays can be a game-changer in various applications, enhancing productivity and providing a more immersive experience. This is advantageous for scenarios such as: Financial Trading, Software Development, Graphic Design, Video Editing, Gaming, Command Centers, Surveillance.



P-Cores and E-Cores
Intel 4 Architecture

Integrated Intel Arc Graphics
with Xe Cores

Neural Processing Unit
AI Engine

Intel® Core™ Ultra Processor

The NT10H5's advanced Intel® Core™ Ultra Processor supercharges productivity across diverse scenarios. In data analysis, it speeds up complex calculations, while in scientific simulations, it enables real-time modeling. For content creators, AI-enhanced tools accelerate video editing and 3D rendering, significantly reducing production time.

The integrated top-tier Intel Arc graphics (GPU) with Xe cores is one of the fastest of its kind and performs competitively in games and real-life applications – best choice if graphics performance is crucial for you.

The integrated Neural Processing Unit (NPU) is designed to accelerate artificial intelligence (AI) and machine learning tasks. It boasts a top maximum performance of 11.5 trillion operations per second (TOPS). Additionally, the full processor performance scales up to 34 TOPS, making it a powerful profile suited for demanding and diverse industrial computing workloads.



Fast Data Access with DDR5 and PCIe 4.0

Experience high-bandwidth, energy-efficient, and unparalleled speed memory for smooth multitasking and data-intensive tasks.

Benefit from the advantages of DDR5 memory with higher bandwidth and lower voltage compared to DDR4.

NT10H5 also features a M.2-2280-Slot with PCI-Express Gen. 4 interface for faster speeds of compact modern M.2 SSD cards.

NT10H5 also integrates a SD card reader for quickly access documents, photos and other files on your SD card.



Multiple modern I/O Ports

The NT10H5 can connect up to four digital 4K/UHD displays. Two USB4 Type-C ports support data transfer speeds of up to 40 Gbps, significantly faster than previous USB versions. Five USB 3.2 plus one USB 2.0 allow you to connect a variety of legacy and modern devices simultaneously. Dual 2.5G LAN ports provide higher network speeds compared to traditional 1G ports, making them ideal for bandwidth-intensive applications like gaming, video streaming, and large file transfers. The Audio Combo port supports both headset and microphone connections. It allows you to connect a headset with an integrated microphone, making it convenient for activities like video calls, gaming, and listening to music.


Front and Back Panel

Front Panel



1. 4x USB 3.2 Gen 2 Type-A Port
Note: the left USB port delivers 0.9A/5V even in S5/Off mode
2. 3.5 mm Audio Combo port supports headphones and headsets (with microphone)
3. Power button with Power LED

Back Panel

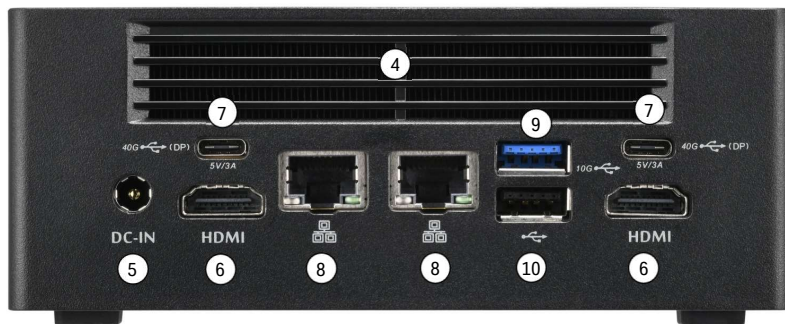

4. Ventilation openings
5. DC-in connector for power adapter
6. 2x HDMI 2.0
7. 2x USB4 Type-C (max. 40 Gbps) with DisplayPort function (DP 1.4) and Power Delivery (PD max. 5V / 3A)
8. 2x 2.5G LAN Port (RJ45)
9. USB 3.2 Gen 2 Port (max. 10 Gbps)
10. 1x USB 2.0 Port
11. SD Card Reader
12. Hole for the Kensington Lock

Left View




Right View



Bottom View



VESA Mount

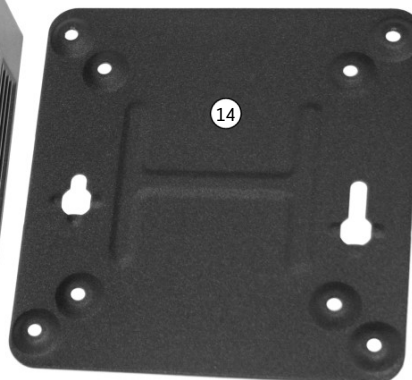

13. Threads for installing the VESA mount (please refer to the Quick Installation Guide)
14. VESA mount supports 75x75 mm and 100x100 mm (screws included)

REQUIRED COMPONENTS

The following components need to be added to make it a fully-configured Mini PC:



(1) Memory Modules

Supports two SODIMM DDR5 memory modules

- type: DDR5-5600 (or higher clock rate)
- form factor: SODIMM with 262 pins
- max. capacity per module: 48 GB
- total capacity of two modules: max. 96 GB



(2) M.2 SSD Card

Supports one M.2 SSD card


- form factor: M.2-2280 (the length is 80 mm)
 - interface: PCI-Express (supports PCIe Gen4x4 and NVMe)
- Note: SATA is not supported!



(3) M.2 WLAN Card (optional)

Supports one WLAN card in M.2-2230 (E-Key) form factor, which is not included in the scope of delivery (possible models: e.g. Intel AX200, AX210 or AzureWave AW-XB547NF, AW-XB591NF or similar).


Two internal antennas are pre-installed, so you just need to install the WLAN module and connect the antennas.



(4) Operating System





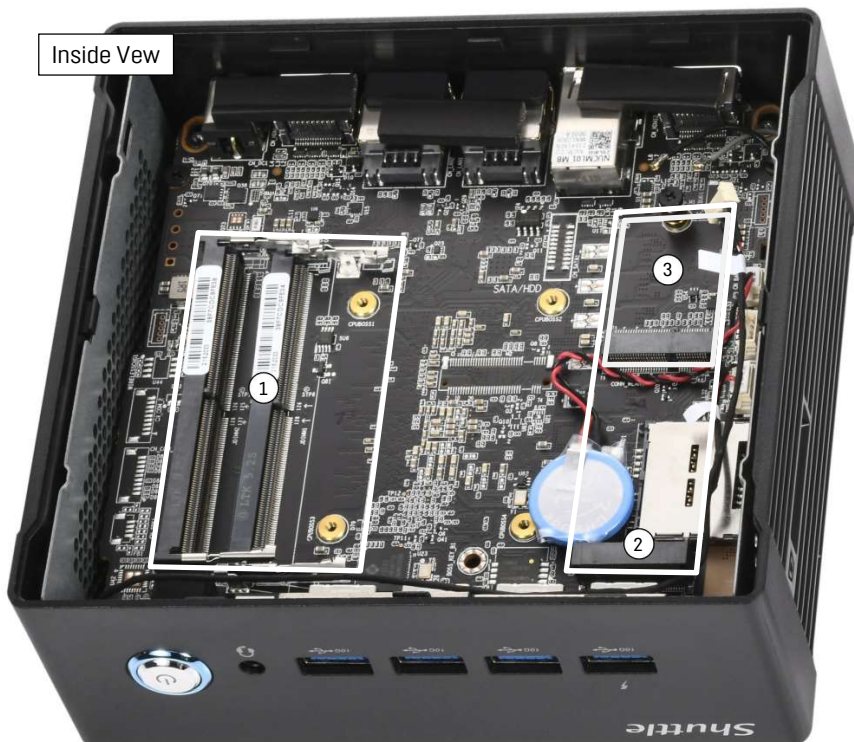

Windows 11 or Linux (64-bit only)

Windows driver download: go.shuttle.eu/NT10H



For installation please refer the Quick Installation Guide.

Shuttle AI-PC Product Overview

	NA10H Series	NT10H Series	DN11H Series
Product Models Processor-Type	NA10H7 – AMD Ryzen R7-8845HS CPU code name "Hawk Point" (Zen-4)	NT10H5 – Intel Core Ultra 5-125H NT10H9 – Intel Core Ultra 9-185H CPU code name "Meteor Lake-H"	DN11H5 – Intel Core Ultra 5-125H DN11H7 – Intel Core Ultra 7-155H DN11H9 – Intel Core Ultra 9-185H CPU code name "Meteor Lake-H"
Chassis Dimensions	Nano Chassis 132 x 143 x 55 mm (WDH) = 1.04 L	Nano Chassis 132 x 143 x 55 mm (WDH) = 1.04 L	Slim Chassis 165 x 190 x 43 mm (WDH) = 1.35 L
Operation System Support	Windows 11 and Linux (64-bit) Windows drivers as download-link	Windows 11 and Linux (64-bit) Windows drivers as download-link	Windows 11 and Linux (64-bit) Windows drivers included (DVD)
M.2 Slots for SSD Cards	1x Slot M.2-2280 supports PCIe Gen4 x4 / NVMe (SATA not supported)	1x Slot M.2-2280 supports PCIe Gen4 x4 / NVMe (SATA not supported)	3x Slots M.2-2280 supports PCIe Gen4 x4 / NVMe supports NVMe Raid 0, 1 and 5 supports SATA (only 2 slots) supports SATA Raid 0 and 1
RAM Support	max. 2x 48 GB DDR5-5600 (SO-DIMM)	max. 2x 48 GB DDR5-5600 (SO-DIMM)	max. 2x 48 GB DDR5-5600 (SO-DIMM)
Integrated Graphics	AMD Radeon™ 780M supports 4x UHD-Displays 2x HDMI 2.0 2x USB4 Type-C (with DP 1.4)	Intel® Arc™ mit Xe-Cores supports 4x UHD-Displays 2x HDMI 2.0 2x USB4 Type-C (with DP 1.4)	Intel® Arc™ mit Xe-Cores supports 4x UHD-Displays 2x HDMI 2.1 2x DisplayPort 1.4
USB Ports	2x USB4 Type-C (DP 1.4 graphics) 5x USB 3.2 Gen 2 Type-A 1x USB 2.0	2x USB4 Type-C (DP 1.4 graphics) 5x USB 3.2 Gen 2 Type-A 1x USB 2.0	2x USB 3.2 Gen 2x2 Type-C 6x USB 3.2 Gen 2 Type-A
Audio Ports	Audio Combo Port (3.5 mm) supports Microphone and Line-out	Audio Combo Port (3.5 mm) supports Microphone and Line-out	1x Microphone Input (3.5 mm) 1x Line-out Output (3.5 mm)
SD Card-Reader	Yes	Yes	—
LAN Ports	Dual LAN – Realtek RTL8125B 2x 2.5 Gbps RJ45 Ports	Dual LAN – Intel i226V 2x 2.5 Gbps RJ45 Ports	Quad LAN – Intel i226LM 4x 2.5 Gbps RJ45 Ports
WLAN	prepared *)	prepared *)	optional (WLN-M1)
VESA Mount (75x75, 100x100 mm)	included	included	included
Power Adapter	120 W, 19V	120 W, 19V	120 W, 19V
Optional Accessories	—	—	Cable for ext. Power Button (CXP01) 2U Rack Mount Kit (PRM01) DIN-Rail Mount (DIR01) Vertical Stand (PS02) WLAN Kit with ext. ant. (WLN-M1) 4G/5G Kit with 4 ant. (WWN04)
Front View			
Rear View			

*) Supports one WLAN card in M.2-2230 (E-Key) form factor, which is not included in the scope of delivery (possible models: e.g. Intel AX200, AX210 or AzureWave AW-XB547NF, AW-XB591NF or similar). Two internal antennas are pre-installed, so you just need to install the WLAN module and connect the antennas.

SHUTTLE XPC nano BAREBONE NT10H5 — SPECIFICATIONS

CHASSIS	<p>Barebone PC with a black plastic chassis</p> <p>Dimensions: 132 x 143 x 55 mm (WLH) = 1038 ml</p> <p>The height is 57.8 mm including rubber feet</p> <p>Weight: 0.8 kg net, 1.7 kg gross</p> <p>Hole for Kensington Lock</p> <p>Includes VESA mount for 75x75 and 100x100 mm standard</p>
OPERATION SYSTEM	<p>This barebone system comes without operating system.</p> <p>It is compatible with:</p> <ul style="list-style-type: none"> - Windows 11, 64-bit - Linux, 64-bit <p>Windows 11 driver download: go.shuttle.eu/NT10H</p>
PROCESSOR	<p>Model: Intel® Core™ Ultra 5 Processor 125H</p> <p>Code name "Meteor Lake-H" (Intel Core Ultra processors - Series 1)</p> <p>System-on-a-chip architecture (SoC) with integrated memory and graphics controller</p> <p>Lithography: Intel 4 process (7 nm) and TSMC N5/N6</p> <p>Performance-cores (P-Cores): 4 cores, 8 threads, clock rate: 1.2 - 4.5 GHz</p> <p>Efficient-cores (E-Cores): 8 cores, clock rate: 0.7 - 3.6 GHz</p> <p>Low Power Efficient-cores: 2 cores, clock rate: 0.7 - 2.5 GHz</p> <p>Total Threads: 18</p> <p>Smart-Cache (L3): 18 MB</p> <p>Base Power (TDP): 28 W</p> <p>Configurable Power (cTDP): 20 W, 28 W or 54 W [1]</p> <p>Neural Processing Unit (NPU): Intel® AI Boost</p> <p>NPU AI performance: 11.5 TOPS (NPU+CPU+iGPU: 34 TOPS) [2]</p> <p>Maximum operating temperature: 110 °C</p> <p>FCBGA2049 package - directly soldered onto the mainboard</p>
COOLING SYSTEM	<p>Heat-pipe cooling system with dual fan concept for optimal airflow:</p> <ol style="list-style-type: none"> 1) Processor fan 80 mm 2) Chassis fan (bottom) 60 mm <p>Supports temperature-controlled RPM fan speed [1]</p>
INTEGRATED GRAPHICS	<p>Integrated Intel® Arc™ graphics engine supports Quad 4K</p> <p>Xe-cores: 7</p> <p>Dynamic graphics clock rate: max. 2.2 GHz</p> <p>Supports DirectX 12.2, OpenGL 4.6, OpenCL 3.0</p> <p>This PC supports up to four independent screens with up to 4K/60Hz (Ultra HD 3840×2160 resolution):</p> <ul style="list-style-type: none"> - 2x HDMI 2.0b - 2x USB4 Type-C with DisplayPort 1.4 function
UEFI FIRMWARE (BIOS)	<p>AMI UEFI Firmware (BIOS)</p> <p>Supports resume after power failure</p> <p>Supports Wake-on-LAN (WOL) and Power on by real time clock (RTC)</p>
H/W TPM FUNCTION	<p>Hardware TPM function: supports DTPM 2.0 with Infineon SLB9670VQ2.0</p> <p>The TPM function can be deactivated in the BIOS setup.</p>
MEMORY SUPPORT	<p>2x S0-DIMM slot with 262 pins</p> <p>Supports DDR5-5600 (PC5-44800) SDRAM at 1.1 V</p> <p>Supports Dual Channel mode</p> <p>Supports a maximum of 48 GB per DIMM, maximum total size: 96 GB</p> <p>Supports two unbuffered DIMM modules (no ECC or registered)</p>
M.2-2280M SSD SLOT	<p>M.2-2280M slot for SSD cards in M.2 form factor</p> <p>Supports PCIe Gen4 x4 with NVMe (no SATA)</p> <p>Supports M.2 cards with a width of 22 mm and a length of 80 mm</p> <p>Supports M.2 cards with M key or B+M key</p>
AUDIO	<p>Realtek ALC269-VC3 Audio Controller</p> <p>3.5 mm / 4-pole combo audio connector (combines Line-out and Microphone input)</p> <p>Can be used for headphones/headsets with 3- or 4-pole jack plug [3]</p> <p>Digital multi-channel audio output: via HDMI and DisplayPort (USB-C)</p>

DUAL 2.5G LAN	Two RJ45 ports with 2 status LEDs each Ethernet Controller: Intel i226V Supports 10 / 100 / 1.000 / 2.500 MBit/s operation (max. 2.5 Gbps) Supports WAKE ON LAN (WOL) Supports network boot by Preboot eXecution Environment (PXE)
M.2-2230-SLOT FOR WLAN CARDS	M.2-2230E slot supports WLAN expansion cards Interfaces: PCI-Express X1 and USB 2.0 Supports M.2 cards with a width of 22 mm and a length of 30 mm (type 2230) This PC comes with two pre-installed internal WLAN antennas with I-PEX4/MHF-IV connectors
SD CARD READER (LEFT SIDE)	SD card reader supports SD cards in the size of 24 mm × 32 mm Supports Micro SD cards with appropriate adapter (not included)
FRONT PANEL CONNECTORS	1x Power button with Power LED (blue) 4x USB 3.2 Gen 2 Type-A (max. 10 Gbps) Note: the left USB port supports USB power in S5/Off mode (max. 0.9 A) 1x Audio Combo port (3.5 mm jack plug, 4-pole) [3]
BACK PANEL CONNECTORS	2x HDMI 2.0 2x USB4 Type-C (max. 40 Gbps) with DisplayPort function (DP 1.4) and Power Delivery (PD max. 5V / 3A) 1x USB 3.2 Gen 2 Type A (max. 10 GBit/s) 1x USB 2.0 2x 2.5G Ethernet LAN (RJ45, Intel i226V) 1x DC-Eingang für externes Netzteil (5,5 / 2,5 mm)
POWER ADAPTER	External 120 W power adapter (fanless) Dimensions: 64.5 mm x 22.5 mm x 98 mm (WHD) Input: 100~240 V AC, 50-60 Hz, max. 1.4 A Output: 19.0 V DC, max. 6.32 A, max. 120 W DC cable ca. 150 cm with coaxial connector: 5.5 / 2.5 mm (outer/inner diameter) The DC-input of the computer supports 19V ± 5%. AC cable, ca. 170 cm, 3-pin Micky MM C6 and Schuko earthed safety plug
SUPPLIED ACCESSORIES	- Multi-language Quick Installation Guide - VESA mount with screws (supports 75x75 and 100x100 mm standards) - Heat sink with two thermal pads for the M.2 SSD card - Power adapter 120 W with AC power cord A DVD driver disk is not supplied. Windows 11 driver download: go.shuttle.eu/NT10H
ENVIRONMENTAL SPECIFICATIONS	Operating temperature range: 0~40 °C Relative humidity range: 10~90% (non-condensing)
CERTIFICATIONS / COMPLIANCE	EMI: CE, FCC, BSMI Safety: CB IEC60950/62368, cTUVus (UL 62368), BSMI Other: RoHS, Energy Star, ErP This device is classed as a technical information equipment (ITE) in class B and is intended for use in living room and office. The CE-mark approves the conformity by the EU directives: (1) 2004/108/EC relating to electromagnetic compatibility (EMC), (2) 2006/95/EC relating to Electrical Equipment designed for use within certain voltage limits (LVD), (3) 2009/125/EC relating to ecodesign requirements for energy-related products (ErP)

Footnotes:

[1] Configurable fan speed and power consumption of the processor

In the BIOS setup, there is a "Fan Mode" option on the "Advanced" page to configure the fan control, which also has an effect on the maximum power consumption of the processor. The default setting "Normal Mode" offers a good balance between performance, temperature and fan speed. The "Fan Mode" setting also defines the upper limits for the average power dissipation (cTDP) and short-term power dissipation in turbo mode (Turbo TDP):

„Fan Mode“ Setting	CPU Performance	Fan Speed	cTDP	Turbo TDP
Performance Mode	maximum	high	54 W	70 W
Normal Mode	high	medium	28 W	54 W
Silent Mode	medium	low	20 W	45 W

[2] AI performance

Processors with the support of artificial intelligence (AI) and machine learning (ML) can process many calculations, especially audio, image and video processing, much faster than classic processors. The AI performance is given in the number (trillions) of arithmetic operations per second (TOPS). The processor used in this product integrates the Intel® AI Boost NPU with 11.5 TOPS performance. The Total AI performance (Platform TOPS) is a measure of the aggregate performance of all the processing units in the processor: CPU, NPU and GPU (graphics).

[3] Audio connector

The 3.5 mm audio jack at the front panel of this device supports both: headphones with a 3-pole connector and also headsets (with microphone) with a 4-pole connector. Headsets with separate connectors for headphones and microphone, though, require an appropriate adapter, if also the microphone should be used.

SHUTTLE XPC nano BAREBONE NT10H5 — Technical Drawings

