
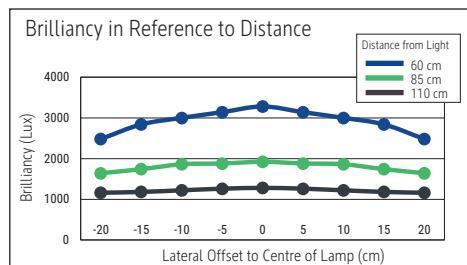


LED floor lamp MAULjuvis sensor, dimmable



- Constant light control via movement and daylight sensors
- Infinitely adjustable dimmer according to activity and individual preferences
- Perceived as pleasant by everyone: Combined direct/indirect workplace lighting
- Approx. 50% upward and approx. 50 % downward light emission
- Double use: Direct lighting of the desk and indirect lighting of the room
- GS-symbol for checked safety, technical safety concept Made by MAUL
- Motion sensor: Reduces the emitted light automatically after a period of 30 minutes without detecting any movement and switches the lamp off after another period of 30 minutes without detecting any movement
- Daylight sensor: The light output of the lamp changes depending on the indoor illuminance level
- Convenient: Diffuser for reduction of shades
- Reduced glare to UGR <19 for fatigue-proof vision
- Protection rating IP20
- Light source and operating device replaceable by an electrician
- Recyclable packaging

Illuminance of the : indirect: 2.920 lux illuminance at 85 cm distance, 1.840 lux illuminance at 110 cm distance - direct: 2.920 lux illuminance at 85 cm distance, 1.840 lux illuminance at 110 cm distance
Colour temperature per light source: 4.000 Kelvin (neutral white)
Number of light sources: 3
Energy efficiency class per light source: C (spectrum A to G)
Weighted energy consumption per light source: 68 kWh/1000 h (34 kWh/1000 h & 2 x 17 kWh/1000 h)
Service life L70B50 per light source: 50.000 h
Useful luminous flux per light source: 13.060 Lumen (6.500 Lumen & 2 x 3.280 Lumen)
Material: Head: Aluminium, metal - Column: Aluminium, metal
Dimensions: Head: 28 x 61 x 4.2 cm - Column: 3.5 x 5.3 cm
Position of the switch: Column

- Stable, massive steel base, 30 x 45 cm. Split base fits around table legs. Height: 196 cm
- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight (incl. packaging)	PU
8258602	white	4002390081115	94052190	base	2.50 m	I shock-proof plug	119,5 x 39 x 17 cm	14.457 kg	1 pc(s).
8258690	black	4002390087247	94052190	base	2.50 m	I shock-proof plug	119,5 x 39 x 17 cm	14.457 kg	1 pc(s).
8258695	silver	4002390075077	94052190	base	2.50 m	I shock-proof plug	119,5 x 39 x 17 cm	14.457 kg	1 pc(s).