

# Smart-UPS On-Line 208 V

Unity output power factor single-phase, double-conversion, online UPS with advanced management features



## A versatile UPS developed for unstable power conditions worldwide

Smart-UPS™ On-Line provides high-density, double-conversion online power protection for servers, voice/data networks, medical labs, and light industrial applications. The Smart-UPS On-Line is capable of supporting loads from 5 kVA to 10 kVA in a rack/tower convertible chassis. The 6 kVA, 8 kVA, and 10 kVA models feature unity output power factor enabling them to support power-hungry blade servers or heavily loaded equipment racks. When business-critical systems require runtime in hours, not minutes, Smart-UPS On-Line can be configured with multiple battery packs to meet aggressive runtime demands.

The included PowerChute™ Network Shutdown management software provides unattended graceful shutdown of network operating systems. All models include an integrated network management card for remote management. The entire Smart-UPS On-Line family provides value to customers with demanding power conditions, including a very wide input voltage window, extremely tight output voltage regulation, frequency regulation, internal bypass, and input power factor correction.

# Smart-UPS On-Line

Industry-leading power factor maximizing UPS density

Rackmount and Tower SRT 5 kVA – 10 kVA



[ SRT5KXLT shown ]

## Standard Features

### Best-in-class Power Density

More real power in watts, 0.85 pf on 5 kVA, Unity on 6 kVA – 10 kVA units.

### High-efficiency “Green Mode”

Achieves 98% efficiency, which saves utility and cooling costs without compromising performance or reliability. Energy STAR Compliant.

### Graphical LCD Display with Multicolor Backlight

Intuitive interface provides detailed and accurate information with ability to configure locally.

### Intelligent Battery Management

Temperature compensated charging extends life and advanced algorithms recommend replacement date. The UPS can inform user which batteries need to be replaced and auto detect when additional battery packs are added.

### Built-in Energy Meter

Measures energy use and displays UPS efficiency in various modes of operation for easy energy tracking.

### Operate without Battery

Ability to immediately protect equipment when power returns.


### Three-year Warranty on Electronics

Additional year of warranty protection for electronics provides peace of mind.

# Smart-UPS On-Line

Proven performance with the world's largest installed base of single-phase, double-conversion products.

Rackmount and Tower SRT 5 kVA – 10 kVA

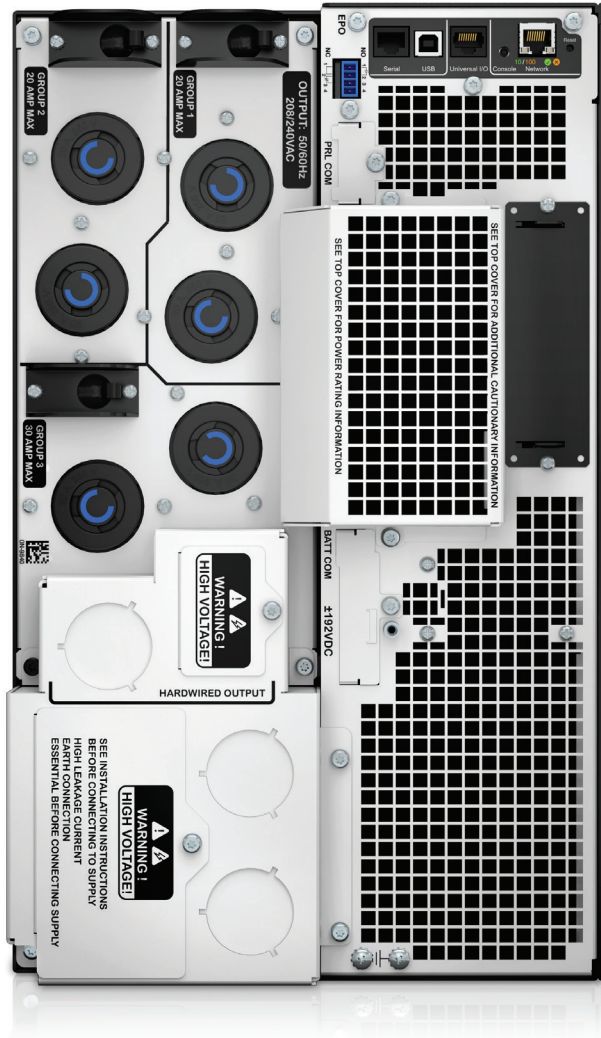

[ SRT10KXLT shown ]

## Additional Features

### Embedded Network Management Card with Environmental Monitoring

Remote monitoring and control of the UPS and the environment via Ethernet connection while freeing up the SmartSlot™ so customers can add accessories for additional communication options.

### Switched Outlet Group(s)

Ability to control a group of output load receptacles independent from the main UPS. Enables:

- Rebooting hung device without cycling the entire UPS.
- Sequenced turn on/off.
- Shedding of non-critical loads based on a variety of parameters (on battery time, runtime remaining, and overload).
- Scheduled time off to conserve energy.

### Emergency Power Off (EPO)

Remote UPS shutoff in the event of a fire or other emergency. The UPS can accept normally open (NO) or normally closed (NC) contacts.

### Communication Ports

Serial, USB, Ethernet, and SmartSlot for network accessory cards.

### Communication Protocols

Modbus Serial, USB PowerSummary, HTTP, SNMP, and Telnet.

# Smart-UPS On-Line Display

Intuitive, easy-to-use LCD provides clear and accurate information in multiple languages.

## Standard Features

### LCD Display Screen:

Accurately provides real-time status updates in your choice of basic or advanced menus.

### UPS Status (Scrolling):

- Output voltage
- Input voltage
- Output frequency
- Runtime
- Load
- Battery health

### Control:

- UPS and outlet group settings
- Bypass control

### Configuration:

- Output voltage, frequency
- Language, brightness, contrast
- Alarm volume
- IP address

### Test and Diagnostics:

- Initiate battery and runtime calibration tests

### About:

- UPS serial number, battery part number
- Battery install and suggested replacement dates



### Backlight screens:

**Amber:** Indication of condition that requires attention

**Red:** Indication of UPS alarm that requires immediate attention





# Product Accessories

## Management Cards

AP9630: UPS Network Management Card with PowerChute Network Shutdown

AP9631: UPS Network Management Card with PowerChute Network Shutdown & Environmental Monitoring

AP9335TH: APC Temperature & Humidity Sensor

AP9810: APC Dry Contact I/O Accessory

AP9624: UPS Interface Expander

## Battery Packs

SRT192BP: APC Smart-UPS SRT 192 V 5 kVA and 6 kVA Battery Pack

SRT192RMBP: APC Smart-UPS SRT 192 V 5 kVA and 6 kVA RM Battery Pack

~~SRT192BP2: APC Smart UPS SRT 192 V 8 kVA and 10 kVA Battery Pack~~

~~SRT192RMBP2: APC Smart UPS SRT 192 V 8 kVA and 10 kVA RM Battery Pack~~

SRT002: APC Smart-UPS SRT 15 ft. Extension Cable for 192 VDC External Battery Packs 5/6 kVA UPS

~~SRT003: APC Smart UPS SRT 15 ft. Extension Cable for 192 VDC External Battery Packs 8/10 kVA UPS~~

## Rail Kits

SRTRK2: APC Smart-UPS SRT 19" Rail Kit for Smart-UPS SRT 5/6/8/10 kVA

SRTRK3: APC Smart-UPS SRT 2 Post Mounting Rail Kit for Smart-UPS SRT 5/6/8/10 kVA

## Backplate Kit

~~SRT001: APC Smart UPS SRT 5 kVA Output HW Kit~~

~~SRT004: APC Smart UPS SRT 5 kVA PDU, 208 V (4) L6-20~~

~~SRT005: APC Smart UPS SRT 6 kVA PDU, 208 V (4) L6-20, (1) L6-30~~

~~SRT008: APC Smart UPS SRT 8/10 kVA PDU, 208 V (6) L6-30~~

## Service Bypass Panels

~~SBP5KRMT2U: APC Service Bypass Panel—200/208/240 V; 30A; BBM; L6-30P Input; (2) L6-30R (2) L6-20R Output~~

~~SBP6KRMT2U: APC Service Bypass Panel—200/208/240 V; 50A; MBB; L6-30P/HW Input; (1) L6-30R (2) L6-20R Output~~

~~SBP10KRMT4U: APC Service Bypass Panel—200/208/240 V; 100A; MBB; Hardwire Input; (3) L6-30R (3) L6-20R Output~~

## Other

SURT013: SURT Equipment Cart

## Replacement Battery Cartridge


APCRBC140



Network Management Card



Battery Pack



Rail Kits

# Runtime Estimates at Half and Full Load (Minutes)

UPS Half/Full Loads	SRT5KRMXLW-HW (2250W / 4500W)	SRT5KXLT (2125W / 4250W)	SRT6KXLT (3000W / 6000W)	SRT8KXLT (4000W / 8000W)	SRT10KXLT (5000W / 10000W)
Internal	11.8/4	<del>12.6/4.4</del>	<del>8.3/2.3</del>	<del>14.4/5.2</del>	<del>11.4/3.7</del>
(1) Battery pack	46.2/20.5	<del>49/21.8</del>	<del>34.7/14.9</del>	<del>34.2/14.6</del>	<del>27.9/11.5</del>
(2) Battery packs	83/38	<del>87.8/40.4</del>	<del>62.9/28.3</del>	<del>55/24.4</del>	<del>45.1/19.7</del>
(3) Battery packs	121/56.4	<del>128.1/59.7</del>	<del>92.1/42.2</del>	<del>76.4/34.6</del>	<del>62.9/28.1</del>
(4) Battery packs	160.4/75.1	<del>169.5/79.5</del>	<del>122.1/56.5</del>	<del>98.3/45</del>	<del>81/36.7</del>

# Smart-UPS On-Line SRT 5 kVA – 10 kVA

## Technical Specifications

PRODUCT FEATURE	SRT5KRMXLW-HW	SRT5KXLT SRT5KRMXLT	SRT6KXLT SRT6KRMXLT	SRT9KXLT SRT9KRMXLT	SRT10KXLT SRT10KRMXLT
<b>Output</b>					
Power rating	5,000 VA/4,500 W	<del>5,000 VA/4,250 W</del>	<del>6,000 VA/6,000 W</del>	<del>8,000 VA/8,000 W</del>	<del>10,000 VA/10,000 W</del>
Nominal output voltage	<del>230 V</del> 208, 220, 230, 240 V (user selectable)	208 V (240 V user selectable)			
Output frequency	50/60 Hz ± 3 Hz (auto sense)		50/60 Hz ± 0.1 Hz (user selectable)		
Topology	Double-conversion Online				
Online efficiency at full load (typical)	94%				
Green mode efficiency at full load (typical)	98%				
Output connections	HW	<del>(2) L6-20R</del> <del>(2) L6-30R</del>	<del>(2) L6-20R</del> <del>(3) L6-30R, HW</del>	<del>(4) L6-20R</del> <del>(2) L6-30R, HW</del>	
<b>Input</b>					
Nominal input voltage	230 V (208, 220, 230, 240 V user selectable)	<del>208 V (240 V user selectable)</del>			
Input voltage range full load (half load)	160 – 275 V (100 – 275 V)				
Input frequency	40 – 70 Hz auto-selecting				
Input connection	Hardwire 3-wire (L1+L2/N+G)	<del>L6-30P</del>	<del>Hardwire 3-wire (L1+L2+G)</del>	<del>Hardwire 3-wire www(L1+L2+G)</del>	
<b>Batteries and Runtime</b>					
Battery type	Maintenance-free sealed lead-acid battery with suspended electrolyte, leak proof				
Typical backup time at 1/2 load (min.)	11.8 min.	<del>12.6 min.</del>	<del>8.3 min.</del>	<del>14.4 min.</del>	<del>11.4 min.</del>
Typical backup time at full load (min.)	4 min.	<del>4.4 min.</del>	<del>2.3 min.</del>	<del>5.2 min.</del>	<del>3.7 min.</del>
Replacement battery (quantity)	APCRBC140 (1)			<del>APCRBC140 (2)</del>	
External battery pack (tower/rack mount)	SRT192BP/SRT192RMBP			SRT192BP2/SRT192RMBP2	
<b>Communication and Management</b>					
Interface ports	RJ-45 with Status LEDs (10/100 Base-T), Serial (RJ45), USB (Type B) and SmartSlot				
Control panel	High Resolution Graphical LCD display				
Emergency power off (EPO)	Yes (NO/NC connections)				
Embedded network management with environmental monitoring	Yes				
<b>Physical</b>					
Rack height	3 U	<del>4 U</del>	<del>6 U</del>	<del>6 U</del>	<del>6 U</del>
Maximum height (RM)	130 mm	<del>171 mm</del>	<del>263 mm</del>	<del>263 mm</del>	<del>263 mm</del>
Maximum width (RM)	432 mm	<del>432 mm</del>	<del>432 mm</del>	<del>432 mm</del>	<del>432 mm</del>
Maximum depth (RM)	719 mm	<del>719 mm</del>	<del>715 mm</del>	<del>715 mm</del>	<del>715 mm</del>
Net weight	54.5 kg	<del>60 kg</del>	<del>112 kg</del>	<del>112 kg</del>	<del>112 kg</del>
<b>Conformance</b>					
Regulatory	CE, VDE, UL-1778, FCC Part 15 Class A, cUL	<del>UL1778, FCC Part 15 Class A, cUL</del>			
Warranty	3 years for electronics, 2 years for battery				