


## Key Features

- Wireless presentation for upgraded efficiency
- Single cable via USB-C with 65W power delivery
- 24/7 Sustainable video playback for continuous communication
- Remote device management with myViewBoard Manager
- ProAV compatibility with Crestron, Extron, and AMX



## Product **Description**

With stunning 4K Ultra HD resolution, high brightness, and landscape and portrait modes, the CDE30 Series offers continuous and sustainable 24/7 display for both corporate and campus communication. Purpose-engineered for ease of use, the display is equipped with a Quad Core SoC to run multiple operations seamlessly, and its USB-C one-cable solution sorts for effortless connection with external devices. Designed for easy-to-operate continuous multimedia playback, the CDE30 Series offers cable-free screen casting and screen sharing through myViewBoard Display and ViewBoard Cast, which also supports Airplay and Chromecast. Remote management via the intuitive myViewBoard Manager makes changing content, broadcasting, and software updates a breeze. Available in 6 sizes ranging from 43" to 98", complete with daisy-chain compatibility, the CDE30 Series meets and exceeds the communication needs of any campus or corporate spaces.

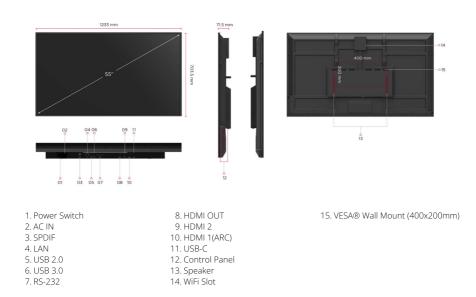

Visit Us www.viewsonic.com

## DISPLAY

## **OPERATING HOURS**

DISPLAY		OPERATING HOURS	
Panel Size:	55"	7/24	
Type/ Tech:	TFT LCD Module. VA type, DLED backlight	DIMENSIONS (W X H X D) 48.54 x 27.70 x 2.81in/	
Display Area (mm):	1209.6 (H) × 680.4 (V) (54.64" diagonal)	Physical (inch / mm):	1233 x 703.5 x 71.5mm
Native Resolution:	3840 x 2160	Packaging (inch / mm): 52.44 x 32.24 x 6.14 in./1332 x 819 x 156 mm	
Aspect Ratio:	16:9		
Colors:	1.07G (8bits + FRC-)	WEIGHT	
Brightness:	450 nits (typ.)	Net (lb / kg):	29.54 lbs/13.4 kg
Contrast Ratio:	1200:1 (typ.), 5000:1 (DCR enabled)	Gross (lb / kg): REGULATIONS	42.99 lbs/19.5 kg
Response Time:	6.5ms	cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM, Mexico Energy, EMC/CE, CB, EAC, UkrSEPRO, RCM, LBL, Flicker free, Green BOM, RoHS, ErP, REACH, SCIP, WEEE, Annex I, Annex II, TPCH, Packing waste, CA65	
Viewing Angles:	H = 178, V = 178 typ.		
Backlight Life:	50,000 hours		
Surface Treatment:	Anti-Glaire, 3H hardness, Haze 25%	PACKAGE CONTENTS  1. Remote Control with batteries 2. Quick Start Guide 3. Power Cables 4. HDMI cable 5. USB-C cable 6. Wall Mount Screw x 4 7. RS232 adapter 8. Compliance statement	
Bezel:	9.9/9.9/9.9/9.9 mm (L/R/T/B)		
Orientation:	Landscape & Portrait		
PLATFORM			
Processor:	Quad-core ARM Cortex A55		
RAM:	4GB		
Storage:	32GB		
INPUT			
HDMI:	2.1x2(3840x2160 @60Hz, HDMI 1 supports ARC)		
RS-232:	x 1		
WiFi Slot:	x 1		
OUTPUT			
HDMI:	2.0 x1(3840x2160 @60Hz)		
SPDIF:	x 1		
LAN			
RJ45:	x 1		
USB			
Туре А:	2.0 x 1, 3.0 x 1		
Туре С:	x1((DP1.2, PD 65W, USB2.0, 100M ethernet)		
SPEAKERS			
10W x2			
EMBEDDED OS			
Android 11			
POWER			
Voltage:	100-240 VAC +/- 10%		
Consumption:	110 W(typ.) < 0.5W(off)		
OPERATING CONDITIONS			
Temperature (° C):	0 to 40°C		
Humidity:	10%-90% RH		