

AXIS C1410 Mk II Network Mini Speaker

Speaker with wide-area coverage for voice messages

AXIS C1410 Mk II Network Mini Speaker is a discreet and affordable speaker that fits into smaller spaces and provides wide area audio coverage. It allows users to remotely warn off intruders before they commit a crime, to deliver instructions during an emergency or to make general announcements. Built-in memory supports pre-recorded messages, or personnel can respond to notifications with live speak. Digital signal processing (DSP) ensures clear sound. Open standards support easy integration with network video, access control, analytics, and VoIP. It also has a built-in PIR sensor for motion detection. AXIS C1410 Mk II is a standalone unit that can be placed almost anywhere, which supports a flexible, scalable and cost-effective approach to system design.

- > [All-in-one speaker system](#)
- > [Connects to standard network](#)
- > [Simple installation with PoE](#)
- > [Remote health testing](#)
- > [PIR sensor for motion detection](#)



AXIS C1410 Mk II Network Mini Speaker

System on chip (SoC)

Model	i.MX8M NANO UL
Memory	1024 MB RAM, 1024 MB Flash

Audio hardware

Enclosure	Sealed enclosure with 2.5 inches broadband dynamic cone speaker
Max sound pressure level	90 dB
Frequency response	100 Hz - 20 kHz
Coverage pattern	145° coaxial
Audio input/output	Built-in microphone (can be disabled)
Built-in microphone specification	50 Hz - 12 kHz
Amplifier description	Built-in 7 W Class D amplifier
Digital signal processing	Built-in and pre-configured

Audio management

AXIS Audio Manager Edge	Built in: <ul style="list-style-type: none"> Content management for music and live/pre-recorded announcements. Scheduling to decide when and where to play specific content. Content prioritization to ensure urgent messages interrupt the schedule. Zone management allowing you to divide up to 200 speakers into 20 zones. Health monitoring for remote discovery of system errors. User management to control who has access to what features. See separate datasheet for more details.
AXIS Audio Manager Pro	For larger and more advanced systems. Sold separately. See separate datasheet for specifications.
AXIS Audio Manager Center	AXIS Audio Manager Center is a cloud service for remote access and management of multi-site systems.

Audio software

Audio streaming	One-way/two-way with optional half-duplex echo cancellation. Mono.
Audio encoding	AAC LC 8/16/32/48 kHz, G.711 PCM 8 kHz, G.726 ADPCM 8 kHz, Axis μ -law 16 kHz, WAV, MP3 in mono/stereo from 64 kbps to 320 kbps. Constant and variable bit rate. Sampling rate from 8 kHz up to 48 kHz.

Network

Network protocols	IPv4/v6 ^a , HTTP, HTTPS, SSL/TLS, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, Bonjour, UPnP™, SNMP v1/v2c/v3 (MIB-II), DNS, DynDNS, NTP, RTSP, RTP, TCP, UDP, IGMPv1/v2/v3, RTCP, ICMP, DHCP, ARP, SOCKS, SSH, NTCIP, SIP (Cisco, Avaya, Asterisk)
-------------------	--

System integration

Application Programming Interface	Open API for software integration, including VAPIX®, One-click cloud connection, AXIS Camera Application Platform (ACAP).
Video management systems	Compatible with AXIS Companion, AXIS Camera Station, video management software from Axis' Application Development Partners available at axis.com/vms
VoIP	Support for Session Initiation Protocol (SIP) for integration with Voice over IP (VoIP) systems. Peer to peer or integrated with SIP/PBX. Tested with: SIP client such as Cisco, Bria and Grandstream and PBX suppliers such as Cisco and Asterisk. Supported SIP features: secondary SIP server, IPv6, SRTP, SIPS, SIP TLS, DTMF (RFC2976 and RFC2833), NAT (ICE, STUN, TURN) Supported codecs: PCMU, PCMA, opus, L16/16000, L16/8000, speex/8000, speex/16000, G.726-32
Intelligent audio	Auto Speaker Test (verification via built-in microphone)
Event triggers	Virtual inputs, AXIS Camera Application Platform (ACAP)

Call: DTMF, State changes

Event actions	Play audio clip, send SNMP trap, send Auto Speaker Test, status LED, File upload via HTTP, network share and email, Notification via email, HTTP, HTTPS and TCP
---------------	---

Built-in installation aids	Test tone verification and identification
----------------------------	---

Approvals

Product markings	CSA, UL/cUL, UKCA, CE, KC, VCCI, RCM
Supply chain	TAA compliant
EMC	EN 55035, EN 55032 Class B, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, Australia/New Zealand: RCM AS/NZS CISPR 32 Class B Canada: ICES-3(B)/NMB-3(B) Japan: VCCI Class B Korea: KS C 9835, KS C 9832 Class B USA: FCC Part 15 Subpart B Class B
Safety	CAN/CSA C22.2 No. 62368-1 ed. 3, IEC/EN 62368-1 ed. 3
Environment	IEC/EN 60529 IP4X

Cybersecurity

Edge security	Software: Signed OS, brute force delay protection, digest authentication, password protection, encrypted file system Hardware: Axis Edge Vault cybersecurity platform Secure element (CC EAL 6+), Axis device ID, secure keystore, secure boot
Network security	IEEE 802.1X (EAP-TLS, PEAP-MSCHAPv2), IEEE 802.1AE (MACsec PSK/EAP-TLS), IEEE 802.1AR, HTTPS/HSTS, TLS v1.2/v1.3, Network Time Security (NTS), X.509 Certificate PKI, host-based firewall
Documentation	<i>AXIS OS Hardening Guide</i> <i>Axis Vulnerability Management Policy</i> <i>Axis Security Development Model</i> AXIS OS Software Bill of Material (SBOM) To download documents, go to axis.com/support/cybersecurity/resources To read more about Axis cybersecurity support, go to axis.com/cybersecurity

General

Casing	Plastic casing, IP40 rated Colors: White Repaintable. For repainting instructions and impact on warranty, contact your Axis partner.
Mounting option	When you mount the device on a soft tile ceiling, use a plate behind the tile for reinforcement.
Power	Power over Ethernet (PoE) IEEE 802.3af/802.3at Type 1 Class 3 (max 12.95 W)
Connectors	RJ45 10BASE-T/100BASE-TX PoE
PIR sensor	Passive infrared (PIR) motion sensor Max range: 6 m (19.7 ft)
Operating conditions	-20 °C to 50 °C (4 °F to 122 °F) Humidity 10–85% RH (condensing)
Storage conditions	-40 °C to 65 °C (-40 °F to 149 °F) Humidity 5–95% RH (non-condensing)
Dimensions	For the overall product dimensions, see the dimension drawing in this datasheet. Ø182 X 52 mm (7.2 x 2.1 in)
Weight	600 g (1.3 lb)
Box content	Installation Guide, AVHS authentication key
Optional accessories	AXIS T91A33 Lighting Track Mount, AXIS T91A23 Tile Grid Ceiling Mount, AXIS TC1601 Universal Mount For more accessories, see axis.com
System tools	AXIS Site Designer, AXIS Device Manager, product selector, accessory selector Available at axis.com
Languages	English, German, French, Spanish, Italian, Russian, Simplified Chinese, Japanese, Korean, Portuguese, Polish, Traditional


Chinese, Dutch, Czech, Swedish, Finnish, Turkish, Thai, Vietnamese

Warranty	5-year warranty, see axis.com/warranty
Part numbers	Available at axis.com/products/axis-c1410-mk-ii#part-numbers
Sustainability	
Substance control	PVC free in accordance with JEDEC/ECA Standard JS709 RoHS in accordance with EU RoHS Directive 2011/65/EU/ and EN 63000:2018 REACH in accordance with (EC) No 1907/2006. For SCIP UUID, see axis.com/partner .

Materials	Renewable carbon-based plastic content: Up to 76% (recycled) Screened for conflict minerals in accordance with OECD guidelines To read more about sustainability at Axis, go to axis.com/about-axis/sustainability
Environmental responsibility	axis.com/environmental-responsibility Axis Communications is a signatory of the UN Global Compact, read more at unglobalcompact.org

- a. *Audio synchronization with IPv4 only.*

Dimension drawing

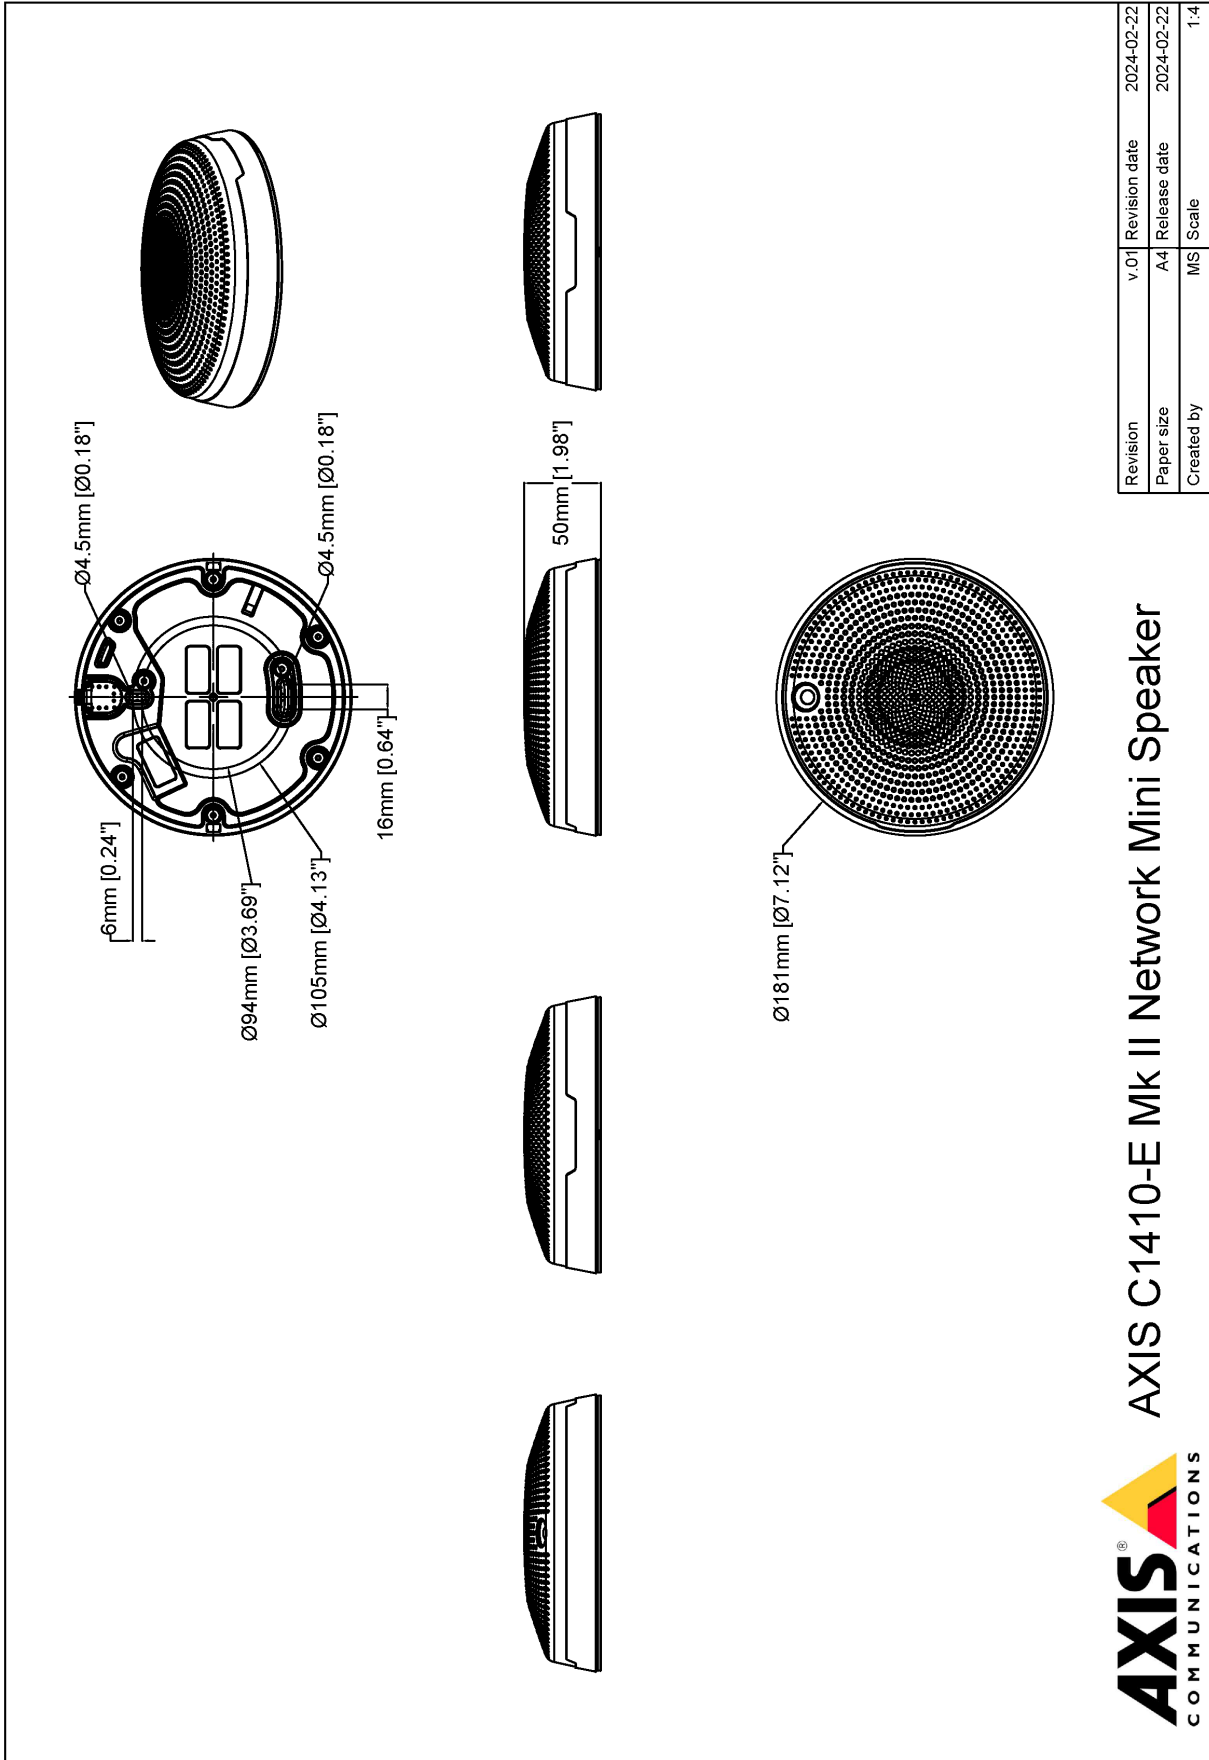

Revision	v.01	Revision date	2024-02-22
Paper size	A4	Release date	2024-02-22
Created by	MS	Scale	1:4

© 2024 Axis Communications

AXIS
COMMUNICATIONS

AXIS C1410-E Mk II Network Mini Speaker

www.axis.com