



Delock M.2 Docking Station for 2 x M.2 SATA SSD with Clone function

Description

This M.2 docking station by Delock enables the installation of **two M.2 SATA SSDs** and it can be connected via USB to the PC or laptop. The included USB cable allows the connection to a free **USB-C™** port.


M.2 SATA SSD clone function

The clone function enables to **copy the content of one SSD to another** without using a PC.

Ideal test equipment

The memory is simply plugged into the robust housing and can be used immediately. No screws, tools or accessories are required, which means that the SSD can be changed quickly.

CLONE
FUNCTION

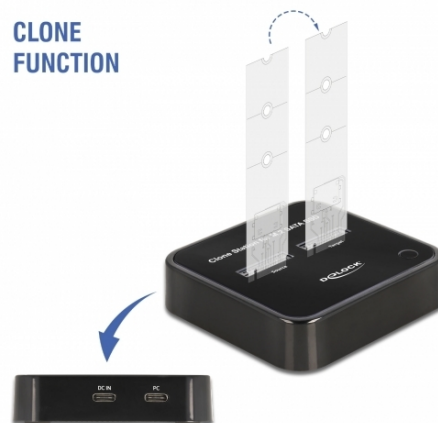

M.2
SATA

Specification

- Connectors:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
 - 2 x 67 pin M.2 key M slot
 - 1 x USB Type-C™ female (power supply)
- Chipset: Asmedia ASM1352R, VIA VL160
- Supports M.2 modules with key B+M based on SATA
- Data transfer rate up to 6 Gbps
- Supports UASP
- LED indicator for power, access and copy status
- Function key: 1 x Clone button
- Bootable
- Dimensions (LxWxH): ca. 72 x 79 x 18 mm
- Hot Plug, Plug & Play

Power supply specification

- Wall power supply
- Input: AC 100 ~ 240 V / 50 ~ 60 Hz / 0.6 A
- Output: 5.0 V / 3.0 A

System requirements

- Android 10.0 or above
- Chrome OS 83.0 or above
- iPad Pro (2018)
- Linux Kernel 5.4 or above
- Mac OS 10.15.6 or above
- Windows 8.1/8.1-64/10/10-64
- Device with a free USB Type-C™ port or with a free Thunderbolt™ 3 port

Package content

- M.2 docking station
- Cable USB-C™ male to USB-C™ male, length ca. 30 cm
- Cable USB-C™ male to USB Type-A male, length ca. 80 cm (power supply)
- External power supply
- User manual

Item no. 63334

EAN: 4043619633340

Country of origin: China

Package: • Retail Box



Images





General	
Function:	Clone Function
Supported operating system:	Android 10.0 or above
	Chrome OS 83.0 or above
	Linux Kernel 5.4 or above
	Mac OS 10.15.6 or above
	Windows 10 32-bit
	Windows 10 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
Slot:	iPad Pro (2018)
	SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Connector 1:	1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
Connector 2:	2 x 67 pin M.2 key M slot
connector 3:	1 x USB Type-C™ female (power supply)
Technical characteristics	
Data transfer rate:	10 Gbps
Physical characteristics	
Length:	79 mm
Width:	72 mm
Height:	18 mm
Colour:	black