
## Key **Features**


- WQHD 3440 x 1440 resolution
- SuperClear® IPS panel
- 21:9 aspect ratio
- 3-side borderless bezel
- · Height-adjustable and swivel stand



## Product **Description**

The ViewSonic® VA3456-mhdj is a 34" monitor with WQHD 3440 x 1440 resolution, 21:9 aspect ratio, and SuperClear® IPS panel. The resolution is 2.4 times higher than standard Full HD, and with SuperClear @ IPS technology, this monitor delivers the same image quality and the same image of the same image image in the same image image is a same image of the same image is a same image image is a same image in the same image is a same image is a same image in the same image is a same image is a same image in the same image is a same image inwhether you are looking at the screen from above, below, the front, or the side. A 21:9 aspect ratio and 3-side borderless bezels provide extra screen real estate so users can display more content, switch between applications more quickly, view documents side by side, and view multiple windows at once. What's more, this monitor is designed with a height-adjustable and swivel stand.

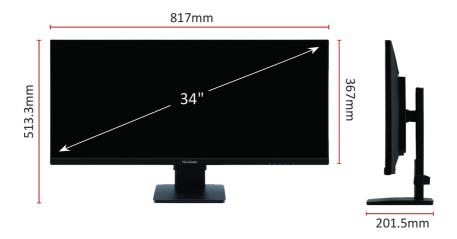

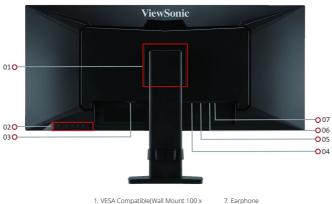

- VESA Compatible(Wall Mount 100 x 100mm)
  Menu Control Panel
  A Ci n
  HDMI-1
  HDMI-2
  DisplayPort

DISPLAY		VIDEO INPUT	
Display Size (in.):	34	Digital Sync:	TMDS - HDMI (v2.0), PCI-E -
Viewable Area (in.):	34.1	o ,	DisplayPort (v1.4)
Panel Type:	IPS Technology	ERGONOMICS	
Resolution:	3440 x 1440	Height Adjust (mm):	100
Resolution Type:	UltraWide QHD	Swivel:	360°
Static Contrast Ratio:	1,000:1 (typ)	Tilt (Forward/Back):	-4° / 20°
Dynamic Contrast Ratio:	50M:1	WEIGHT (IMPERIAL)	
•		Net (lbs):	20.3
Light Source:	LED	Net Without Stand (lbs):	15
Brightness:	400 cd/m² (typ)	Gross (lbs):	25.6
Colours:	1.07B	WEIGHT (METRIC)	
Colour Space Support:	10 bit (8 bit + FRC)	Net (kg):	9.2
Aspect Ratio:	21:9	Net Without Stand (kg):	6.8
Response Time (Typical GTG):	4ms	Gross (kg):	11.6
Viewing Angles:	178º horizontal, 178º vertical	DIMENSIONS (IMPERIAL) (W	XHXD)
Backlight Life (Hours):	30000 Hrs (Min)	Packaging (in.):	35.4 x 18.1 x 9.1
Curvature:	Flat	Physical (in.):	32.2 x 16.27~20.21 x 7.9
Refresh Rate (Hz):	75	Physical Without Stand (in.):	32.2 x 14.4 x 2.3
Adaptive Sync:	Yes	DIMENSIONS (METRIC) (WXI	
Blue Light Filter:	Yes	Packaging (mm):	900 x 460 x 230
Flicker-Free:	Yes	Physical (mm):	817 x 413.31~513.31 x 201
	NTSC: 72% size (Typ), sRGB: 104%	Physical Without Stand (mm):	817 x 367 x 59
Colour Gamut:	size (Typ)	GENERAL	011 x 001 x 03
Pixel Size:	0.233 mm (H) x 0.233 mm (V)	GENERAL	cTUVus, FCC-B, ICES003, CEC, MX-
Surface Treatment:	Anti-Glare, Hard Coating (3H)	Regulations:	CoC, Mexico Energy, CE, CE EMC,
COMPATIBILITY			CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, RCM
PC Resolution (max):	3440x1440		VA3456-MHDJ x1, 3-pin Plug (IEC
Mac® Resolution (max):	3440x1440	PACKAGE CONTENTS:	C13 / CEE22) x1, HDMI Cable (v2.0; Male-Male) x1, Quick Start Guide x1
PC Operating System:	Windows 10 certified; macOS tested		Please dispose of in accordance with
Mac® Resolution (min):	3440x1440	Recycle/Disposal:	local, state or federal laws.
CONNECTOR		Warranty:	*Warranty offered may differ from market to market
3.5mm Audio Out:	1		market to market
HDMI 2.0 (with HDCP 2.2):	2		
DisplayPort:	1		
Power in:	3-pin Socket (IEC C14 / CEE22)		
AUDIO	3-piii Gocket (IEG C14 / CEE22)		
Internal Speakers:	3Watts x2		
POWER	Swalls X2		
	30W		
Eco Mode (Conserve):			
Eco Mode (optimised):	37W		
Consumption (typical):	43W		
Consumption (max):	45W		
Voltage:	AC 100-240V, 50/60 Hz		
Stand-by:	0.5W		
Power Supply:	Internal		
ADDITIONAL HARDWARE			
Kensington Lock Slot:	1		
Cable Organisation:	Yes		
CONTROLS			
Physical Controls:	Key 1 (favorite), Key 2, Key 3, Key 4, Key 5 (power)		
On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu		
OPERATING CONDITIONS			
Temperature:	32°F to 104°F (0°C to 40°C)		
Humidity (non-condensing):	20% to 90%	-	
WALL MOUNT			
VESA Compatible:	100 x 100 mm		
INPUT SIGNAL			
Frequency Horizontal:	HDMI (v2.0): 15 ~ 120KHz,		
rioquency rionzonial.	DisplayPort (v1.4): 24 ~ 120KHz		

HDMI (v2.0): 24 ~ 76Hz, DisplayPort (v1.4): 48 ~ 76Hz

Frequency Vertical: