

LC Duplex Adapter with Plastic Housing

Article no.

53334.1OM5



Description

LC Duplex Adapter with Plastic Housing, breakout SC-simplex, with snap-in fixing.

General data

Type of connector connection 1	LC-Duplex
Type of connector connection 2	LC-Duplex
Accessories	Self-Tapping Screw
Design	SC-Simplex
Dust cover	Ja

Mechanical characteristics

Material housing	plastic
Type of fastening	screw/lock
Material sleeve	ceramic

Dimensions

length	29,2 mm
width	22 mm
height	9,3 mm

Environmental conditions

Operating Temperature	-25 – 70 °C
Storage temperature	-40 – 80 °C

Standards, approvals, certifications

Conform to Standard	IEC61754-20
---------------------	-------------

This datasheet was created automatically on 23-08-2018 . Technical changes reserved.



LC Duplex Adapter with Plastic Housing


Article no.

53334.1OM5

Available variants

Article no.	Title	Category	Colour	Suitable for type of fibre	Type	Insertion loss 1310nm	Insertion loss 850nm
53334.1OM5	Adapter LC Duplex OM5, ceramic sleeve, lime green, (SCsimplex)	OM5	lime green	Multimode	LC / PC		< 0,3dB
53334.1	Adapter LC dpx. OM4 sleeve ceramic, e-vio, (SCsimplex)	OM4	erica-violet	Multimode	LC / PC		< 0,3dB
53357.31	LC dpx. Adapter OM3/OM4 sleeve ceramic, aqua, SC spx.	OM3	aqua	Multimode	LC / PC		< 0,3dB
53348.32	LC duplex adapter multimode beige, sleeve ceramic	OM2	beige	Multimode	LC / PC		< 0,3dB
53350.31	LC duplex adapter singlemode blue, sleeve ceramic	OS2	blue	Singlemode	LC / PC	< 0,3dB	
53343.31	LC/APC dpx adapter SC simplex, plastic housing	OS2	green	Singlemode	LC / APC	< 0,3dB	

Technical drawings

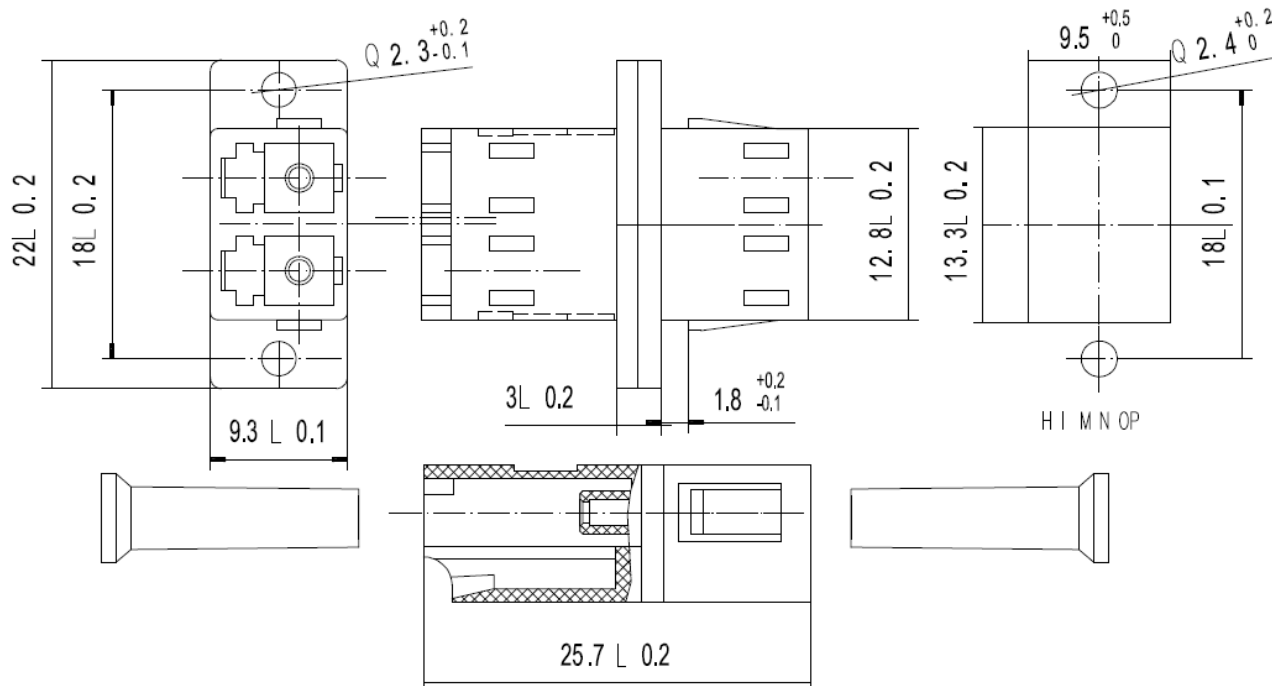

This datasheet was created automatically on 23-08-2018. Technical changes reserved.

DATASHEET

LC Duplex Adapter with Plastic Housing

Article no.

53334.1OM5

accessory

80715.1-200	Thread screw with nut M2 x 8
80550.1-50	Self-tapping screw

This datasheet was created automatically on 23-08-2018 . Technical changes reserved.

