

# **AOS-S and AOS-CX Transceiver Guide**

**Edition: 17**

The Aruba logo consists of the word "aruba" in a lowercase, rounded, orange sans-serif font. The letters are closely spaced, with the 'a' and 'u' having a distinctive shape.

a Hewlett Packard  
Enterprise company

## Copyright Information

© Copyright 2024 Hewlett Packard Enterprise Development LP.

This product includes code licensed under certain open source licenses which require source compliance. The corresponding source for these components is available upon request. This offer is valid to anyone in receipt of this information and shall expire three years following the date of the final distribution of this product version by Hewlett Packard Enterprise Company. To obtain such source code, please check if the code is available in the HPE Software Center at <https://myenterpriselicense.hpe.com/cwp-ui/software> but, if not, send a written request for specific software version and product for which you want the open source code. Along with the request, please send a check or money order in the amount of US \$10.00 to:

Hewlett Packard Enterprise Company  
Attn: General Counsel  
WW Corporate Headquarters  
1701 E Mossy Oaks Rd Spring, TX 77389  
United States of America.

## Notices

The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Confidential computer software. Valid license from Hewlett Packard Enterprise required for possession, use, or copying. Consistent with FAR 12.211 and 12.212, Commercial Computer Software, Computer Software Documentation, and Technical Data for Commercial Items are licensed to the U.S. Government under vendor's standard commercial license.

Links to third-party websites take you outside the Hewlett Packard Enterprise website. Hewlett Packard Enterprise has no control over and is not responsible for information outside the Hewlett Packard Enterprise website.

---

<b>Contents</b> .....	<b>3</b>
<b>Updates to this edition</b> .....	<b>6</b>
<b>Overview</b> .....	<b>9</b>
How to use this Guide .....	9
Conventions .....	9
Note on product images .....	9
Port numbering in examples .....	9
Types of transceiver modules and network cables .....	10
Data rate .....	11
Transmission distance .....	11
Nominal wavelength .....	12
Fiber .....	12
Fiber types .....	12
Fiber diameter .....	13
Connector types .....	14
Lucent connector or local connector (LC) .....	14
Multifiber Push On (MPO) connector .....	14
Senko nano (SN) connector .....	15
Proper crossover mapping .....	16
Optical encoding methods (NRZ vs PAM4) .....	17
Splitting of QSFP+ and QSFP28 ports .....	19
Split mode on QSFP-DD ports for the 9300 series .....	19
DAC breakout cables .....	20
Breakout optical cables .....	21
Fiber breakout cables (from HPE storage products) .....	22
Compatible split optical transceivers to lower-speed transceivers .....	23
Split capabilities of specific models .....	24
Optical parameters .....	27
Transmit power .....	27
Receive sensitivity .....	27
Using attenuators (for short test cables) .....	27
Allowable link loss on fiber runs .....	27
Copper transceiver modules .....	28
Transmission distance .....	28
Connector .....	29
Identification of 4x4 part numbers .....	29
Unsupported transceiver mode .....	31
Supported vs unsupported .....	32
Glossary of terms .....	33
<b>QSFP-DD modules</b> .....	<b>36</b>
QSFP-DD, QSFP56, QSFP28, and QSFP+ compatibility .....	36
Models, specifications, and compatibility .....	37
400G Q-DD optical interoperability with slower speed optics .....	39
400G Q-DD to Q-DD and Q-DD to split QSFP56 AOC (active optical cables) .....	40
200G Q-DD to split QSFP28 AOC (active optical cables) .....	41

<b>QSFP28 modules</b>	<b>44</b>
100G QSFP28 optical transceiver modules that use MPO connectors	44
Models, specifications, and compatibility	44
100G QSFP28 optical transceiver modules that use LC connectors	48
Models, specifications, and compatibility	48
100G QSFP28 DAC and breakout DAC (copper cables)	53
Models, specifications, and compatibility	53
100G QSFP28 AOC and breakout AOC (active optical cables)	57
Models, specifications, and compatibility	57
QSFP28 to SFP28 adapter support	60
Models, specifications, and compatibility	60
<b>QSFP+ Modules</b>	<b>63</b>
40G QSFP+ optical transceiver modules that use MPO connectors	63
Models, specifications, and compatibility	63
40G QSFP+ optical transceiver modules that use LC connectors	67
Models, specifications, and compatibility	67
40G QSFP+ DAC and breakout DAC (copper cables)	70
Models, specifications, and compatibility	70
40G QSFP+ AOC and breakout AOC (active optical cables)	76
Models, specifications, and compatibility	76
40G QSFP+ to SFP+ Adapter	79
<b>SFP56 Modules</b>	<b>80</b>
SFP56 optical transceiver modules	80
Models, specifications, and compatibility	80
Tri-speed capable 50G	81
SFP56 direct attach over copper (DAC) cables	85
Models, specifications, and compatibility	85
<b>SFP28 Modules</b>	<b>88</b>
SFP28 optical transceiver modules	88
Models, specifications, and compatibility	88
25G SFP28 Direct Attach over Copper (DAC) cables	94
Models, specifications, and compatibility	95
25G SFP28 AOC (Active Optical Cable)	98
Models, specifications, and compatibility	98
<b>SFP+ Modules</b>	<b>103</b>
SFP+ optical transceiver modules	103
Models, specifications, and compatibility	103
10G SFP+ copper transceiver modules	119
Models, specifications, and compatibility	119
SFP+ DAC cables	124
Models, specifications, and compatibility	124
<b>SFP Modules</b>	<b>133</b>
Gigabit SFP optical transceiver modules	133
Models, specifications, and compatibility	133
100-Megabit SFP optical transceiver modules	144
Models, specifications, and compatibility	144
Gigabit BiDi optical transceiver modules	150
Models, specifications, and compatibility	150
Gigabit SFP copper transceiver modules	154
Models, specifications, and compatibility	154



---

<b>HPE servers and systems support</b> .....	<b>163</b>
Aruba data center networking solution for HPE .....	169
<b>HPE storage product support</b> .....	<b>174</b>
<b>Cabling and technology information</b> .....	<b>180</b>
Technology standards and safety compliance .....	180
Cabling specifications .....	181
1000 BASE-T Cable Requirements .....	182
10 GBASE-T Cable Requirements .....	182
<b>Support and other resources</b> .....	<b>184</b>
Accessing Aruba Support .....	184
Accessing updates .....	185
HPE Networking Support Portal .....	185
My Networking .....	185
Warranty information .....	185
Regulatory information .....	185
Documentation feedback .....	185

Edition 17 reflects support up to the AOS-CX 10.14.000x release.

This edition also reflects updates to AOS-Switch code 16.11.0018.

The latest version of the AOS-S and AOS-CX Transceiver Guide can be found on <https://networkingsupport.hpe.com> by navigating to **Software & Documents > Search files** and entering "Transceiver Guide" in the search window:

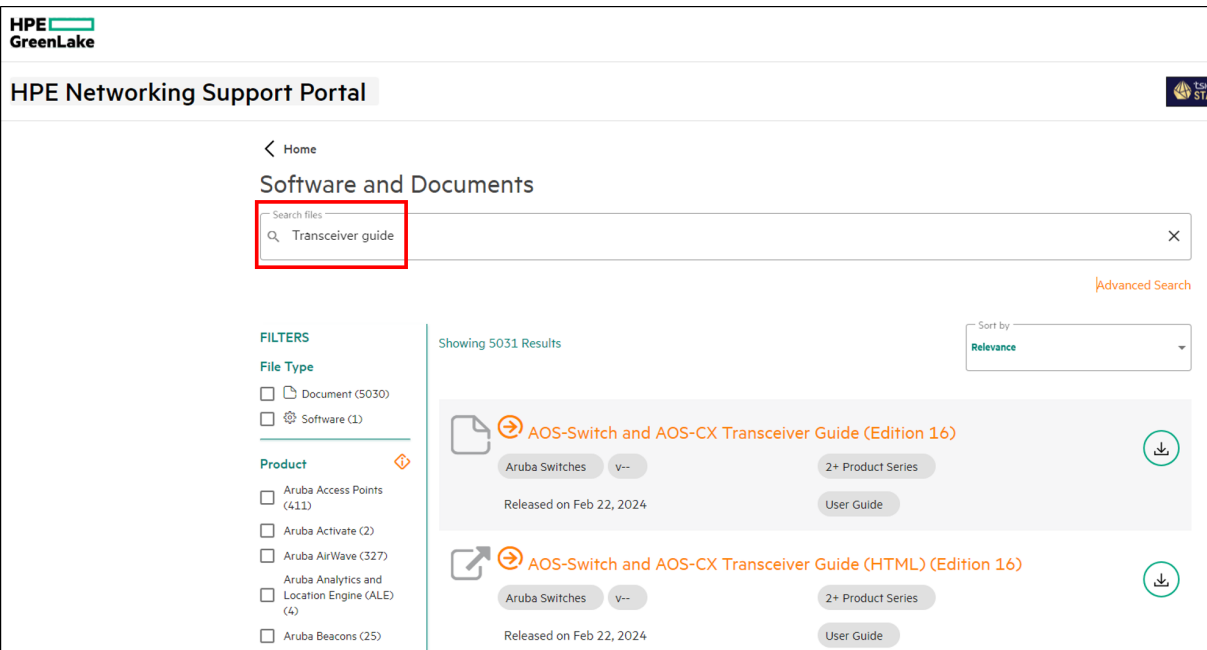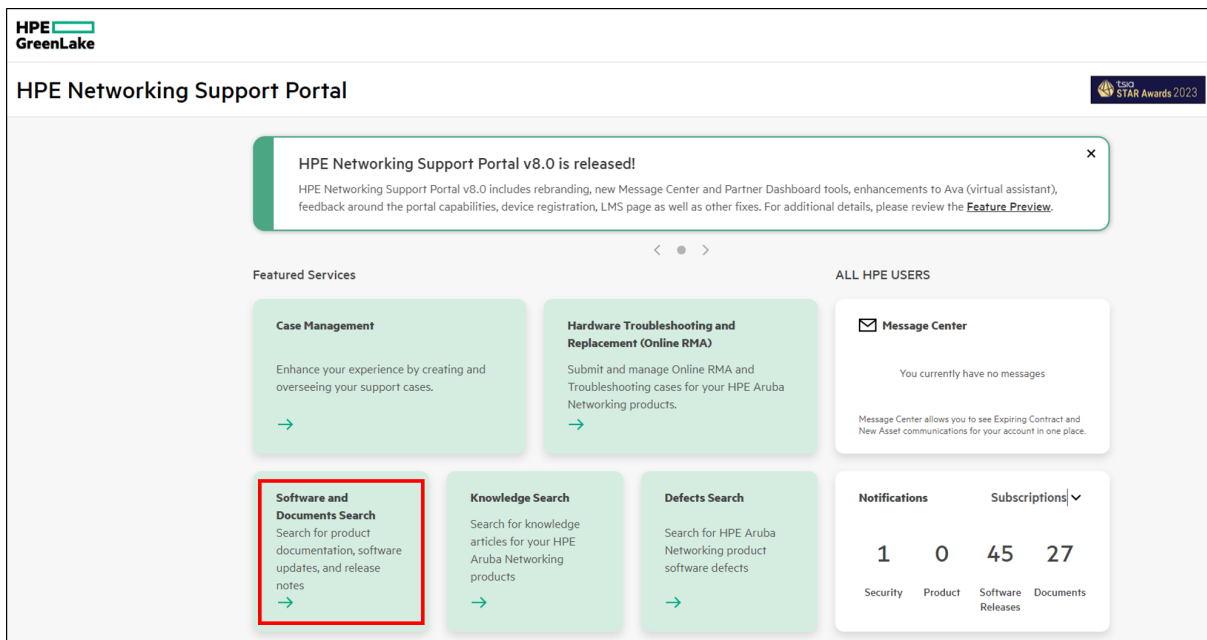

This edition reflects updates for AOS-CX 10.13.10xx and 10.14 along with AOS-S 16.10.0018.

New switch introductions:

- Applicable speed chapters now reflect minimal SW required
- 9300S – New switch models introduced April 1, 2024 and May 6, 2024
- 6300L – New switch models introduced April 1, 2024
- 6300 – New switch TAA models (M and F) introduced June 3, 2024

### **Overview chapter**

- Changed ASP reference to new HPE Networking Support Portal
- Added Link Loss calculation section and improved attenuation calculation formula
- Provided an example of an SN connector is and associated use-case (specific to 400G QDD xcvrs)

### **QSFP-DD (400G-200G) chapter**

- Corrected pinout of MPO16 to 4xMPO12 for 400G SR8 to 4x 100G SR2 (channel pairs now indicated)
- Added 5 new QSFP-DD xcvrs (3 with new SN connectors, and 2 with MPO12 connectors)
  - SN connectors: 4x100G DR; 4x100G FR; 4x100G LR
  - MPO12 connectors: 400G DR4; 400G PLR4

### **QSFP28 (100G) chapter**

- Added 2 new QSFP28 xcvrs: 100G DR and 100G LR (not the same as 100G LR4)
- 9300 32D
  - Added support for the QSA28 adapter and a number of 10G and 25G optics
  - No support for 10G/25G DACs nor 25G AOCs at this time
- QSA28 Adapter: Clarification for the 8400 modules - no support for QSA28 adapter

### **QSFP+ (40G) chapter**

- Added correction: 8100 supports 40G BiDi, LR and ER4 (100G ER4 remains unsupported)

### **SFP56 (50G) chapter**

- Clarified that 50G tri-speed xcvrs (SR, eSR, LR) may only be used in 50G-enabled ports. They cannot be used in a 10G or 25G port.

### **SFP28 (25G) chapter**

- Added new C-Class 25G SR & LR (requires updated CX software)
- Added HPE storage AOC cables (HPE storage cables have alternate lengths compared to Aruba 25G AOCs). Only applies to the 8325 Switch Series.
- Introduced 6300L April 1, 2024

### **SFP+ (10G) chapter**

- Added the 8100 to the SFP+ 10GBASE-T and DAC section
- Added new C-Class 10G SR, LR, ER (requires updated CX and AOS-S software)
- Introduced 6300L April 1, 2024
- Corrected 6400 support for HPE 10G DAC 3m and 5m cables (\*487655-B21 and \*537963-B21)

### **SFP (1G and 100Mbps) chapter**

- Added correction: 8100 supports 1G. No support for 100Mbps.
- Introduced 6300L April 1, 2024

### **HPE Storage products support chapter**

- Added additional HPE storage products for support (200G transceiver, AOCs and DACs)
- Updated items that were published in the April 2024 update to SPOCK
- Updated select items to now be supported on the 9300 32D with CX 10.14.0001



---

To find the desired HPE storage product search this guide for the HPE storage SKU number

---



The transceivers listed in this document represent the currently available and End of Sale products at the time of this publication. Not all transceiver products are supported in every switch available from Aruba. Consult the datasheets for the applicable switch product for a list of supported transceiver products. Datasheets can be found at <https://www.arubanetworks.com/resources/product-and-solution-information/>.

## How to use this Guide

Read this Overview chapter for basic understanding of technologies and features, such as split ports and breakout cables.

1. Find the chapter with the port type you are interested in – usually related to the speed of the interconnect:
  - Q-DD or QSFP-DD = 400G
  - QSFP56 = 200G. Also supported by Q-DD ports
  - QSFP28 = 100G. Also supported by Q-DD ports
  - QSFP+ = 40G. Also supported by Q-DD ports and in QSFP28 ports
  - SFP56 = 50G. Supports 25G, 10G and 1G
  - SFP28 = 25G. Also supported by SFP56 ports
  - SFP+ = 10G. Also supported by SFP28 and SFP56 ports
  - SFP = 1G, 100Mbps (may also be supported by SFP+, SFP25, SFP56 ports - see specific comments by switch model)
2. See the details of the Transceiver, DAC or AOC including wavelength and distance supported over which type of medium.
3. Find the switch of interest, and note the minimum software version required to support the transceiver, DAC, or AOC and any exceptions (such as limitations to select ports or port configuration requirements).



---

HPE Server and Systems and HPE Storage interconnect products (DACs, Split DACs/AOCs) are noted with an asterisk. Some products may not be available to Aruba-exclusive resellers.

---

## Conventions

This section describes the conventions used in the documentation.

## Note on product images



---

Product images in this guide may differ from actual product.

---

## Port numbering in examples

The port numbers in this document are for illustration only and might be unavailable on your device.

## Types of transceiver modules and network cables

Transceiver module type		Connector head
QSFP-DD (Q-DD)	QSFP-Double-Density (different physical edge connector than QSFP28 or QSFP56)	Depending on technology, MPO-12 strand, MPO-16 strand, SN 2-strand, or LC 2-strand
	Q-DD AOC (Active Optical Cable for interconnecting devices) 3m to 50m reaches	Optical cable permanently attached
QSFP28 module (transceiver)	QSFP28 optical transceiver module	MPO 12-strand or LC 2-strand
	QSFP28 DAC (copper cable for interconnecting devices) 1m to 5m reaches	Twinax cable permanently attached
	QSFP28 AOC (Active Optical Cable for interconnecting devices) 2m to 30m reaches	Optical cable permanently attached
QSFP+ module (transceiver)	QSFP+ optical transceiver module	MPO 12-strand or LC 2-strand
	QSFP+ DAC (copper cable for interconnecting devices) 1 - 5m reaches	Twinax cable permanently attached
	QSFP+ AOC (Active Optical Cable for interconnecting devices) 7m to 30m reaches	Optical cable permanently attached
SFP56 module	SFP56 same size as SFP28/SFP+ (optical)	LC 2-strand (new tri-speed; refer to <a href="#">SFP56 Modules</a> )
	SFP56 DAC (copper cable for interconnecting devices) 0.65m and 3m reaches	Twinax cable permanently attached
	SFP56 DAC (copper cable for interconnecting devices)	Twinax cable permanently attached
SFP28 module	SFP28 same size as SFP+ (optical)	LC 2-strand
	SFP28 DAC (copper cable for interconnecting devices) 0.65m to 5m reaches	Twinax cable permanently attached
	SFP28 AOC (Active Optical Cable for interconnecting devices) 3m to 15m reaches	Optical cable permanently attached
SFP+ module (transceiver)	SFP+ optical transceiver module	LC 2-strand or 1-strand (for BiDi)
	SFP+ DAC (copper cable for interconnecting devices)	Twinax cable permanently attached
	10GBASE-T copper transceiver module	RJ-45

Transceiver module type		Connector head
		(Requires Cat6a for maximum supported distances. Shielded 6a cable recommended to eliminate EMI issues.)
Small form-factor pluggable (SFP) module (transceiver)	100-Megabit SFP optical transceiver module	LC 2-strand
	Gigabit SFP optical transceiver module	
	1G SFP copper transceiver module	RJ-45 (1G requires Cat5e for maximum supported distances.)

The available transceiver modules and network cables vary by device models and are subject to change over time. For the most up-to-date list of transceiver modules and network cables, contact your Aruba sales representative or technical support engineer.



For information about the transceiver modules and network cables available for each device model, see the Datasheets or QuickSpecs for the applicable switch product. Refer to the tables within this guide for use-case limitations for specific switch models.

## Data rate

Data rate is the number of bits transmitted per second. The unit of measure for data rate is Megabits per second (Mbps) or Gigabits per second (Gbps). Transceiver modules, optical, Direct Attach over Copper (DAC), and Active Optical Cables (AOC) products provide the following levels of data rates:

- 400 Gbps (optical, AOC at this time)
- 200 Gbps (AOC at this time)
- 100 Gbps (optical, DAC, and AOC)
- 50 Gbps (optical and DAC at this time)
- 40 Gbps (optical, DAC, and AOC)
- 25 Gbps (optical, DAC, and AOC)
- 10 Gbps (optical, DAC, and RJ45 10GBASE-T)
- 1000 Mbps ((gigabit) optical and RJ45 1GbT)
- 100 Mbps ((Fast Ethernet) optical only)

## Transmission distance

Through unshielded or shielded twisted pair (UTP/STP) cables signals can only be transmitted over a distance of 100 m (328.08 feet). This behavior occurs because signals attenuate during transmission through the UTP cables.

Attenuation refers to the dissipation of the power of a transmitted signal as it travels over a cable.

Attenuation occurs because signal transmission suffers certain resistance from the cable, which weakens the signals as they travel over the cable. When signals are transmitted over a long distance,

signal strength decreases significantly, causing the signal-to-noise ratio to drop below the accepted level. This decrease makes it impossible to distinguish between signals and noise, which results in data loss.

Patch panel and punch down blocks also affect attenuation; that is, they can be a source of issues resulting in shorter distances or data loss.

10GBASE-T connections require Category 6a as a minimum for proper 10G speeds up to the 100m distance dictated by the IEEE 802.3ae standard for a fixed 10GBASE-T port. The JL563A/JL563B transceiver has a limit of 30m max distance due to limited power available to the transceiver (vs a fixed 10GBASE-T port). Anything less (Cat 6, 5e, 5) will compromise the distance that 10G over copper can achieve.

Shielded Twisted Pair (STP) Cat 6a cable is recommended when using the 10GBase-T transceiver (JL563A/JL563B).

Use of STP prevents EMI events from affecting data traffic carried on the wire - known as Crosstalk or Alien Crosstalk. Large EMI events from electronically noisy environments may be coupled onto unshielded cabling and cause temporary packet errors. Fixed 10G ports have designs to counteract these types of bit error conditions, that the 10GBASE-T transceiver cannot counteract consistently. Using STP Cat6a cables mitigate the errors significantly. All packet loss errors observed in extensive testing are considered recoverable by the host system with the JL563A/JL563B transceiver.

## Nominal wavelength

Nominal wavelength (wl) represents the wave band used for optical signal transmission. The following nominal wavelengths are available for common optical transceiver modules representing three wavebands:

- 850 nm waveband: Used for short-reach transmission.
- 1310 nm and 1550 nm waveband: Used for middle-reach and long-haul transmission.

## Fiber

### Fiber types

Fibers are classified as multimode fibers and single-mode fibers.

### Multimode fibers

Multimode fibers (MMFs) have thicker fiber cores and can transport light in multiple modes. However, the intermodal dispersion is greater and worsens as the transmission distance increases.

Multimode fibers can be classified into multiple grades according to their diameters and modal bandwidth. The modal bandwidth of a multimode fiber is determined by the expression of the maximum modulation frequency pulse that can pass a fiber  $\times$  the fiber length. The modal bandwidth is a comprehensive index reflecting the optical characteristics of a multimode fiber.

International Telecommunication Union (ITU) defines multimode fiber types in its G series standards. The commonly used multimode fiber is defined in the ITU G.651 standard. The G.651-compliant fiber transmits light at the wavelength range 800 nm to 900 nm or 1200 nm to 1350 nm.

### Multimode fiber grades

Fiber mode	Fiber grade	Fiber diameter (µm)	Modal bandwidth at 850 nm (MHz*km)
Multimode fiber	OM1	62.5/125	200
	OM2	50/125	500
	OM3	50/125	2000
	OM4	50/125	4700

Other factors that influence the transmission distance of multimode fibers include interface type, nominal wavelength, and fiber grade. The modal bandwidth values shown above are for the fiber grades listed. There are multimode fibers that have different modal bandwidth characteristics and do not necessarily match the OM1 - OM4 grades. See the individual transceiver specifications for distances supported when using MMF OM1-OM4. OM5 is a grade of multimode fiber that is primarily designed for short wave division multiplexing (SWDM) used by 40G speeds and higher. There usually is no distance advantage for 10G through 40G speeds that use single wavelengths over an OM5 fiber.

### Single-mode fibers

Single-mode fibers (SMFs) have a small core size, typically 9 µm or 10 µm, and can transmit light in only one mode. Single-mode fibers suffer little intermodal dispersion and are suitable for long-haul communication. Single-mode fibers transmit light at the nominal wavelength of 1310 nm or 1550 nm.

Telecommunication Industries Alliance (TIA)/Electronic Industries Alliance (EIA) defines that single-mode fibers use yellow outer jackets with the mark "SM".

ITU defines single-mode fiber types in its G series standards. The most commonly used single-mode fibers are defined in ITU G.652 and G.655 standards. The following table describes features of the G.652 and G.655-compliant fibers.

#### Features of G.652- and G.655-compliant single-mode fiber

Single-mode fiber type	Wavelength (nm)	Features	Applications
G.652-compliant fiber (standard single-mode fiber)	1260 to 1360 1530 to 1565	Zero dispersion at 1310 nm	Connecting transceiver modules with a nominal wavelength of 1310 nm or 1550 nm.
G.655-compliant fiber (non-zero dispersion shifted fiber)	1530 to 1565	Near-zero dispersion around 1550 nm	For 1550 nm wavelength-division multiplexing (WDM) transmissions.

### Fiber diameter

Fiber diameter is expressed as core diameter/cladding diameter, in µm. For example, 9/125 µm means that the fiber core diameter is 9 µm and the fiber cladding diameter is 125 µm.

For the HPE devices, the following fiber diameters are recommended:

- **G.651 standard multimode fiber:** 50/125 µm or 62.5/125 µm
- **G.652 standard single-mode fiber:** 9/125 µm
- **G.655 non zero dispersion shifted single-mode fiber:** 9/125 µm

## Connector types



---

Cover the connector with a dust cap when it is not connected to any optical fibers.

---

Connectors connect transceiver modules to the corresponding transmission media. The transceiver modules available for Aruba products use the following types of connectors:

### Lucent connector or local connector (LC)

Single LC connectors (also known as Simplex) are typically used for 1G & 10G BiDi (BiDirectional) optics. Dual LC connectors (Duplex) are typically used in normal optical types.

Fiber connectors used for insertion into optical transceivers are typically of the ferrule polish type PC (Physical Contact) or UPC (Ultra Physical Contact). These minimize the air gap when inserted into a transceiver or when fiber to fiber mating. They are used interchangeably and when not specified use PC or UPC connectors.

Another type of polished end is the APC (Angled Physical Contact) usually with an 8° polished angle. Although this reduces reflected signal loss, the difficulty in mating the two angled surfaces limits it to only the most demanding splicing conditions. For each type of transceiver in this guide, note what type of connector is used, and whether it is APC or UPC/PC.

Refer to the transceiver specifications to determine whether to use fiber connectors of PC, UPC or APC.




---

40G BiDi uses only Duplex fiber versus MPO (see below) for 40G SR4 applications.


---

**LC connector (Simplex = single fiber, Duplex = dual fiber), SN connector**

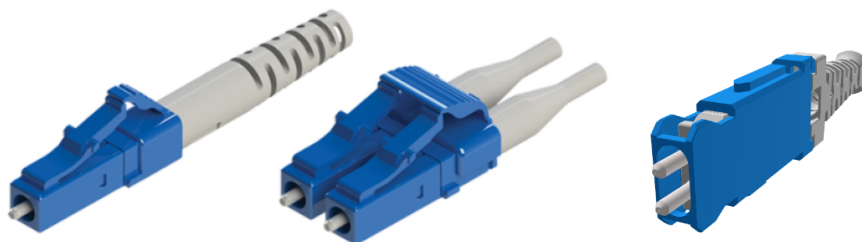

### Multifiber Push On (MPO) connector


**MPO connector: Female (guide holes) and Male (guide pins)**

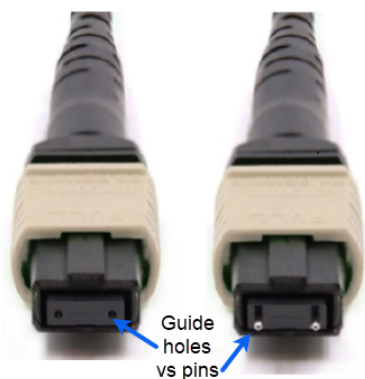


The 40G SR4, 100G SR4, 200G MPO, and 400G MPO transceiver modules use cables with female MPOs (connectors which have guide holes in the end face of the MPO connector). The transceiver has guide pins within the MPO receptacle.

- MPO12 connectors are used by QSFP+ 40G SR4 and QSFP28 100G SR4 optics (12 multimode fibers). 400G eDR4 (12 singlemode fibers) only use 8 fibers mapped to the 4 channels. The 4 center fibers are not used.
- MPO16 connectors are used by QSFP-DD 400G SR8 optics where all 16 fibers are mapped to the 8 channels used by 400G Short Reach SR8 technology. MPO16 connectors have the key in a different position than MPO12, preventing either from plugging into the wrong type of transceiver.

MPO12 or MPO16 cables can either be MMF for short reach applications or SMF for long reach applications. MPO12 connectors have a centered "key" to ensure proper up/down insertion.
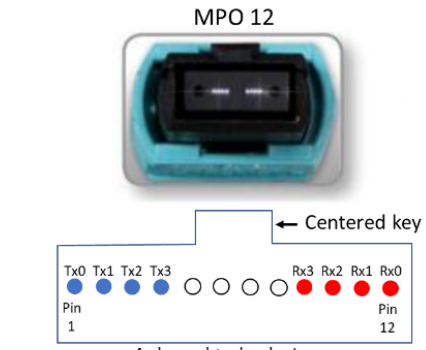
<p>MPO12 connectors have 12 fibers</p> <p>4-channel technologies: 40G SR4 / 100G SR4 (MMF) / 400G eDR4 (SMF) use 4 pairs (Txn/Rxn) Fibers 1 and 12 form a pair for channel 0 Fibers 2 and 11 form a pair for channel 1 Fibers 3 and 10 form a pair for channel 2 Fibers 4 and 9 form a pair for channel 3 and center 4 fibers are unused</p> <p>2-channel technologies: 100G SR2 (MMF) Fibers 1 and 12 form a pair for channel 0 Fibers 2 and 11 form a pair for channel 1 and center 8 fibers are unused</p>	<p style="text-align: center;"><b>MPO 12</b></p>  <p style="text-align: center;">← Centered key</p> <p style="text-align: center;">4-channel technologies 40G SR4 &amp; 100G SR4 (MMF), 400G eDR4(SMF) center 4 fibers are unused</p>
---	---


MPO16 uses an offset "key" to assure that MPO12 are not used where an MPO16 is required.
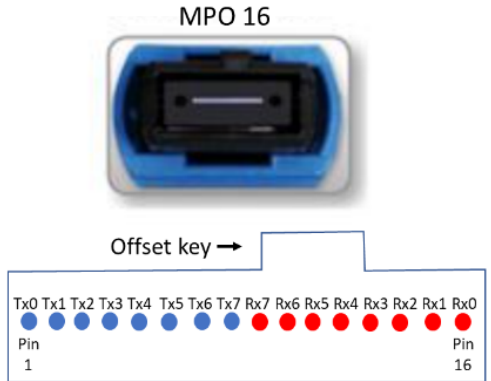
<p>MPO16 uses all 16 fibers; depending on the opposite end transceiver or port type the fibers are mapped differently.</p> <p>Fibers 1 and 16 for channel 0 Fibers 2 and 15 for channel 1 Fibers 3 and 14 for channel 2 Fibers 4 and 13 for channel 3 Fibers 5 and 12 for channel 4 Fibers 6 and 11 for channel 5 Fibers 7 and 10 for channel 6 Fibers 8 and 9 for channel 7</p>	<p style="text-align: center;"><b>MPO 16</b></p>  <p style="text-align: center;">Offset key →</p> <p style="text-align: center;">8-channel technologies 400G SR8 (MMF) use all 16 fibers paired to 8 channels</p>
--	---

### Senko nano (SN) connector

A senko nano (SN) connector is a very small form factor (VSFF) designed and optimized for 400G QSFP-DD transceivers. It has a push-pull boot for simple installation and removal. Similar to an LC connector, it has robust 1.25mm ferrule technology (vs MPO-12's ferrule with 12 fibers of 125um in diameter). What's different is the physical size and location of fiber pins. When seen from front, both fibers of LC


connector are aligned horizontally. The pins of an SN connector are vertically aligned which takes up less space compared to an LC connector.

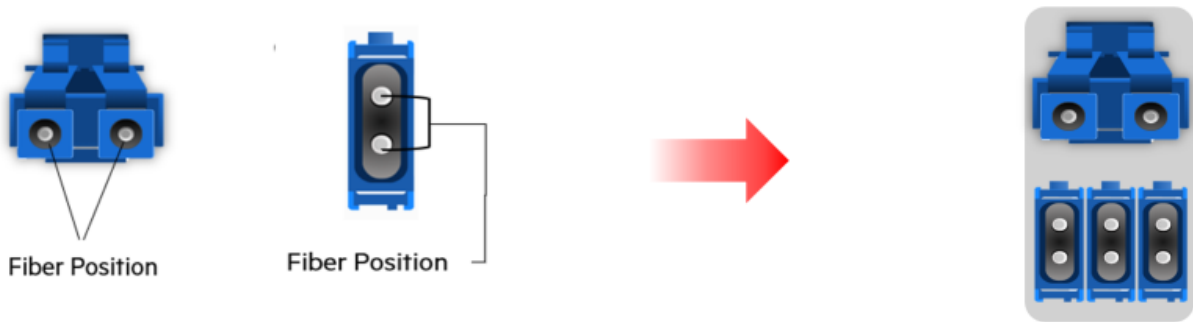


Due to its compact size, a QSFP-DD form factor can accommodate four vertically aligned SN connectors at once when they are stacked next to each other.



400G QSFP-DD transceivers with SN support are designed for next-generation data centers to reduce the space and effort required for cable installation. A 400G physical port can breakout into 4 independent links of 100G using SN connectors when inserted with full capacity in a Q-DD transceiver. Doing so replaces the requirement for breakout cables. Currently these 4x 100G SMF transceivers are compatible with respective 100G xcvr standards which support LC connectors. As a result, an SN to LC SMF patch cable is required to deploy these 100G links.



100G split using MPO to MPO/LC breakout

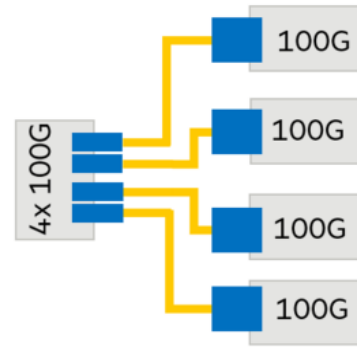


100G split using SN to LC SMF cable

### Proper crossover mapping

Patch cables and structured cabling from endpoint to endpoint must create a proper crossover connection to link transmit to the other ends receive, with attention to each channel selection.



The MPO cable types used by 40G SR4/eSR4 and 100G SR4 and used for "patch" cable connections or direct transceiver to transceiver connection are typically referred to as female "Type B", key-up crossover cables. Type B cables route fibers 1 through 12 to fibers 12 through 1 on the opposite end to create a crossover and matching transmit to receive channels.

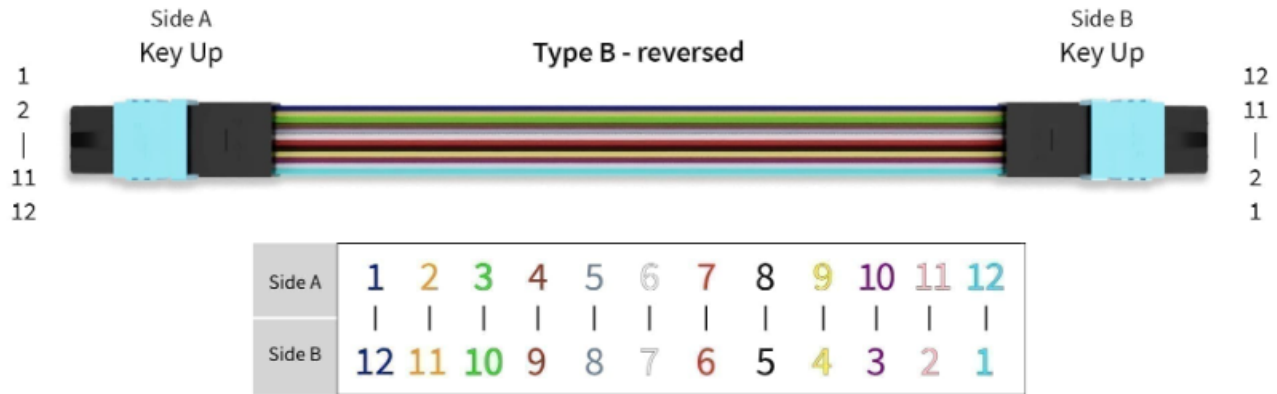


MPO16 type B cables are mapped in a similar fashion with fiber 1 to 16, 2 to 15, and so on. Be aware that using two (an even number of) crossover cables in series cancels this crossover effect and no connection will be established. This can occur if you are unaware of how your cable-plant infrastructure is mapped from patch panel to patch panel. If your fiber plant is already structured with crossover connections, then two more patch cables at both endpoints that are also crossover will create a proper crossover connection (essentially an odd number of crossovers). If your cable-plant is connected as straight-through (i.e. 1-1, 2-2, ..., 12-12) then you will need one crossover cable on one end, and a straight through cable on the other end of the cable run (i.e. an odd number of cross-over points).




Do not use Type A (straight-through) or Type C (paired crossovers) MPO cables for direct transceiver to transceiver connections.

Type C cables are not correct because the Tx for channels 0 and 1 are paired, instead of a pairing of TX0 (1) and RX0(12), etc.

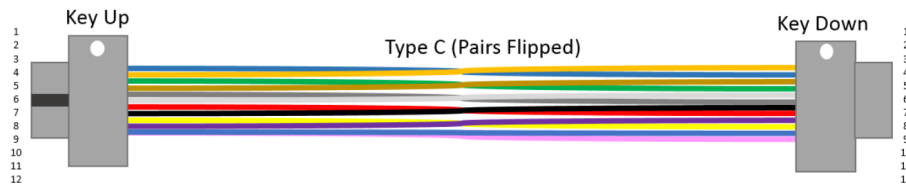


### Optical encoding methods (NRZ vs PAM4)

1G, 10G and 25G use an optical encoding method called Non-Return to Zero (NRZ). NRZ sends data by representing a 1 as a high signal and 0 as a low signal. The optical signal is detected as a pulse for a 1 and no pulse for a 0. At a clock rate close to 10Ghz (10.31Ghz) or 25Ghz (26.56Ghz) you can transmit 10Gbps or 25Gbps using NRZ encoding.

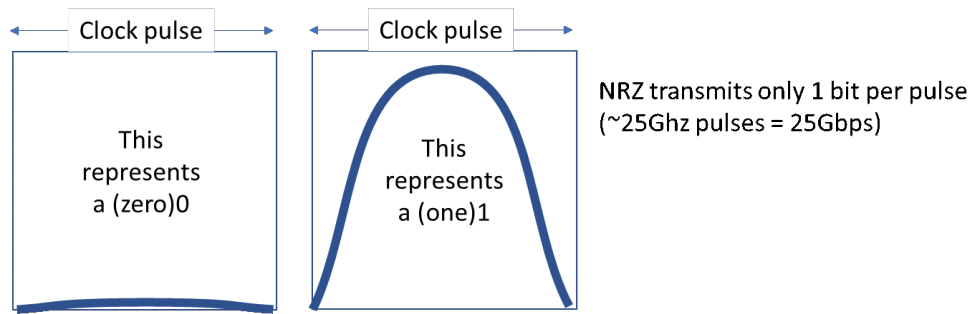

50G optics use another optical encoding method called Pulse Amplitude Modulation, 4 levels (PAM4). The optics still transmit at a 26.56Ghz signalling rate, however each pulse now transmits 2 bits of data. Since each pulse can be interpreted in any of 4 values (00, 01, 10, or 11) it can effectively transmit 50Gbps of data per wavelength. A similar technique can use a ~50Ghz signal and effectively transmit 100Gbps.

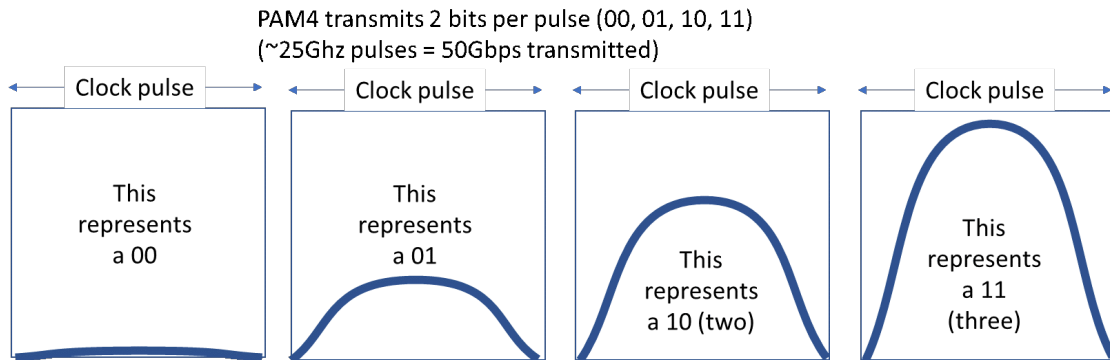

Speed	Form factor	Channels	Speed/Channel & type	Split mode where applicable
40G	QSFP or QSFP+ SR4 or LR4	4	10G NRZ	40G SR4 => 4x 10G SR 40G LR4 (can't be split)
100G	QSFP28 SR4, LR4, ER4L	4	25G NRZ	100G SR4 => 4x 25G SR 100G LR4, ER4L (can't be split)
100G	QSFP56 SR2	2	50G PAM4 (25G signal, 4 levels)	Not applicable
200G	QSFP56 SR4	4	50G PAM4 (25G signal, 4 levels)	200G SR4 => 2x 100G SR4
400G	QSFP-DD or Q-DD SR8, eDR4	8 4	50G PAM4 (25G signal, 4 levels) 100G PAM4 (50G signal, 4 levels)	400G SR8 => 2x 100G SR4 400G eDR4 => 4x 100G FR1 (SMF)

Where 40G is composed of 4 channels of 10G streams, parallel optics (40G SR4) are used with discrete 4 pairs of fibers. Each pair is transmitting at 10G and can connect to 10G SR optics for each channel. 100G SR4 also uses 4 discrete channels (all 8 fibers are required for the 100G link), or split into 4 separate channels of 2 fibers each, transmitting at 25G connecting to 25G SR optics for each channel. With 100G using a QSFP56 form factor port (capable of utilizing PAM4 optics) where the bandwidth is 50G over 2 discrete channels, each paired fiber can now connect to 2 separate 50G SR optics.

## Splitting of QSFP+ and QSFP28 ports

Quad-SFP (QSFP+ and QSFP28) ports allow for four channels of lower-bandwidth communication.

AOS-CX release 10.05 introduced this feature for select switches and modules. Split port is not available for AOS-S products.

- A QSFP+ 40G port can be split into four(4) 10G speed ports
- A QSFP28 100G port can be split into four(4) 25G speed ports

Most QSFP28 ports can be used with either 40G or 100G optics, DAC or AOC cables. Not all QSFP28 port can be split into channels of 10G or 25G: what's required are MACs and PHYs that can support both 10G and 25G speeds. Some designs will allow only splitting into the four (4) channels at 10G because they lack a 25G MAC (for example, the Aruba 8400 Switch Series JL366A 6port 40G/100G module). Some switches/modules also limit only certain ports to be split because of design combinations of PHY/Ports or limitations of the maximum number of MACs in a switching ASIC.

An example CLI configuration for port 1/1/52:

```
switch(config-if)# interface 1/1/52
switch(config-if)# split
This command will disable the specified port, clear its configuration,
and split it into multiple interfaces. The split interfaces will not
be available until the next system or line module reboot.

Continue (y/n)? y

switch(config-if)# show interface brief
-----
Port          Native Mode Type          Enabled Status Reason          Speed Description
          VLAN
-----
1/1/52:1 --   routed QSFP+DA3x4 yes      up           --           10000 Aruba-AP
1/1/52:2 --   routed QSFP+DA3x4 yes      up           --           10000 --
1/1/52:3 --   routed QSFP+DA3x4 yes      down        Waiting for link --           --
1/1/52:4 --   routed QSFP+DA3x4 yes      down        Waiting for link --           --
```



AOS-CX release 10.05 and 10.06 requires the config to be saved and the switch or module to be rebooted to take on the new configuration for the port. This requirement is removed in AOS-CX 10.07 and later releases.

## Split mode on QSFP-DD ports for the 9300 series

QSFP-DD ports on the Aruba 9300 32D switch series are capable of operating with different speeds for the split ends.

Using the CLI command: **split [<COUNT>][<SPEED>][confirm]**

The **<COUNT>** parameter specifies the number of child interfaces to activate upon splitting the port. The **<SPEED>** parameter specifies the speed for the child interfaces. For additional information on the **split** command please refer to the CLI Guide for the Aruba 9300 Switch Series.

When the **split** command is used on a QSFP+ port it always implements 4 links at 10G. On a QSFP28 port 4 links at either 25G or 10G.

Number of child interfaces	Child interface speed	Examples**
4	100G	R9B48A Aruba 400G Q-DD to 4xQSFP56 100G 7m AOC * connect to HPE Server Adapters that are 100G QSFP56 R9B42A Aruba 400G Q-DD MPO12 eDR4 2km SMF xcvr * R9B63A ARUBA 100G QSFP28 LC FR1 2KM SMF xcvr
4	100G (over MMF)	R9B41A Aruba 400G Q-DD MPO16 SR8 100m MMF xcvr using a custom MPO16 split to 4 MPO12 connecting to 4x S1C93A Aruba 100G QSFP28 MPO SR2 100m 12-fiber MPO MMF transceiver. 400G SR8 16 fiber map to 4 sets 100G SR2 optics. SR2 only uses 4 fibers (1-2 and 11-12 of the MPO12). Refer to <a href="#">400G Q-DD optical interoperability</a> for additional details.
2	200G	R9B53A Aruba 400G Q-DD to 2xQSFP56 200G 7m AOC * connect to HPE Server Adapters that are <b>200G QSFP56</b>
2	100G	R9B58A 200G QDD to 2xQSFP28 100G 7m AOC * connect to ports that are 100G QSFP28
2	100G (over MMF)	R9B41A Aruba 400G Q-DD MPO16 SR8 100m MMF xcvr using a custom MPO16 split to 2x MPO12 connecting to 2x JL309A Aruba 100G QSFP28 MPO SR4 100m 12-fiber MPO MMF Transceiver. MPO16 to 2x MPO12 maps fibers 1-4 & 12-16 to MPO(1) and 5-11 to MPO(2).
4	25G	(845420-B21) HPE QSFP28 to 4x25G SFP28 7m AOC {HPE Server product} * connect to ports that are 25G SFP28 JL309A Aruba 100G QSFP28 MPO SR4 MMF xcvr * Connect to 25G SR transceivers
4	10G	For 10G connections, you can only resort to using optical splits of a 40G SR4/eSR4 transceivers (JH231A or JH233A)  JH233A HPE X142 40G QSFP+ MPO eSR4 300M xcvr * J9150D Aruba 10G SFP+ LC SR 300m MMF xcvr

\* Solution on the far end of the link

\*\* For additional information please refer to the product datasheet.




---

400G to 400G products do not require the **split** command.

---

## DAC breakout cables



DAC breakout cables typically have a QSFP-type connector on one end and four (4) SFP-type connectors at the other end.

DAC cables are passive devices and used for short (<5m lengths) distances. 40G breakout and 100G breakout DACs look the same, but they are different parts (different Part Type information encoded on both ends).

40G splits into 4 channels of 10G and the SFP+ ends identify as a 10G DAC part.

100G port may be split in a similar manner:

- The QSFP28 port is configured as a 100G split into 4x 25G channels or
- QSFP28 ports can also support and run at 40G and split into 4x 10G channels
- The cable speed is not configurable and cannot be mixed speeds
  - QSFP28 cables are always encoded as 100G, split ends identify as a 25G DAC part and
  - QSFP+ cables are always encoded as 40G, split ends identify as a 10G DAC part

Refer to the the [QSFP-DD modules](#) chapter for more about split cables at 400G or 200G speeds.

## Breakout optical cables



Parallel optical technologies such as 40G SR4/eSR4 and 100G SR4 optical transceivers can also split into four separate optical streams to connect to 10G SR or 25G SR/eSR optics on the opposite end of the link using fiber breakout cables.

LR4/ER4 technologies use a Singlemode Fiber (SMF) in each direction, and multiplex (combine) 4 different wavelengths over a single fiber in each direction (hence LR4/ER4 use a 2-fiber LC connector). The wavelengths are de-muxed on the receive side. Unlike SR4 technologies, where each channel can be split into separate channels, LR4/ER4 technologies cannot be split into separate 10G or 25G LR technologies. Aruba offers a 400G PLR4 transceiver as of March 2024 (S3N94A 400G PLR4 QDD MPO SMF). This S3N94A xcvr would require an SMF MPO split cable to effect 4x 100G connections to 100G LR connections (not compatible with 100G LR4).

The fiber breakout cable used is an MPO to 4x LC type of cable with Multimode Fiber (MMF) pairs in a specific configuration (see above MPO Fiber channel assignment).

The LC ends can be connected to your fiber patch panel to reach the end of the link to a 10G or 25G SR/eSR transceiver (depending on which speed is being split). Ensure you obtain a female (no pins) MPO 12-fiber connector mapped to only 4 LC connectors of Multimode Fiber of OM3 or better. Fiber breakout cables that have 6 LC connectors are usually mapped for a different type of application and cannot be used with 40G or 100G transceivers.

The distance this optically split link can support is determined by the 40G or 100G transceiver, not the 10G or 25G transceiver on the other end of the link. For example, a 100G SR4 can reach 70m over OM3 or 100m over OM4 -- this is the same distance as a 25G SR on the other end of the links. Using a 25G eSR4 (JL485A) transceiver with a longer reach of 200m over OM3 or 400m over OM4 will not accomplish the longer reach, but it is indeed optically compatible and can link to the 100G SR4 limits of 70m/100m.

The following optical breakout cables can be used with 40G SR4/eSR4 to split into 4x10G SR, or with 100G SR4 to split into 4x25G SR compatible streams.

These cables are ordered from fiber cable vendors or the HPE Compute and Server or Storage business units. They may not be available to Aruba-only resellers.




---

Fiber split cables are readily available from cable vendors. Ensure that any acquired cables are mapped properly and have the proper APC or UPC ends per transceiver requirement.

---

### Fiber breakout cables (from HPE storage products)

The HPE Storage division offers fiber cables for direct and split-cable use cases.

Aruba-only distribution partners and resellers may have difficulty placing orders for these items. Contact your HPE account team for assistance. The following list of MPO style cables will depend on the transceiver type being used to split into lower speed connections. Certain MPO-style transceivers use an MPO12 (also simply called MPO) meaning that the connector only has 12 fibers. In the case of 100G SR4 and 40G SR4/eSR4 only 8 fibers are in use. The 4 center fibers are not used (in some cases described as MPO8). Higher speed transceivers (QSFP-DD 400G SR8) use an MPO16 with 16 fibers, of which all 16 are used and broken out into split groupings of 4xMPO12 to 100G SR2 (SR2 where only 4 fibers are used per 100G SR2 transceiver being different than SR4). Use this table to match the fiber split cable to the transceivers for your use case.

#### ***MPO16 to MPO16 cables - Direct connection between two high speed short reach transceivers***

SKU #	Description	Notes
R4D51A	HPE Premier Flex MPO16/MPO16 OM4 2m Cbl	400G SR8 (R9B41A) to 400G SR8 (R9B41A)
R4D52A	HPE Premier Flex MPO16/MPO16 OM4 5m Cbl	
R4D53A	HPE Premier Flex MPO16/MPO16 OM4 10m Cbl	
R4D54A	HPE Premier Flex MPO16/MPO16 OM4 15m Cbl	
R4D55A	HPE Premier Flex MPO16/MPO16 OM4 30m Cbl	

The above MPO16 cables are all angle physical connector (APC)-appropriate for the 400G SR8 transceiver (R9B41A) to connect to another 400G SR8 directly.

They are not appropriate for SMF type 400G DR4 (S3N93A) or eDR4 (R9B42A).

#### ***MPO16 to 4x MPO8 cables - Higher speed short reach to 4x lower speed transceivers***

SKU #	Description	Notes
S2T36A	HPE Premier Flex MPO16/4xMPO8 OM4 5m Cbl	400G SR8 (R9B41A) to 4x 100G SR2 (S1C92A)
S2T37A	HPE Premier Flex MPO16/4xMPO8 OM4 10m Cbl	

The MPO16 is an APC and the MPO8 is a standard PC type. The above cables are fanned out approximately 2m from the 4xMPO8 end. E.g. S2T37A is 8m to where the cable splits to the the 4xMPO8 ends and provides roughly 2m for each of the MPO8 ends.

### **MPO16 to 2x MPO8 cables - Higher speed short reach to 2x lower speed transceivers**

Product	Description	Notes
S1H57A	HPE Premier Flex MPO16 to 2xMPO8 OM4 5m Cable	400G SR8 (R9B41A) to 2x 200G SR4 (*R5Z83A)
S1H58A	HPE Premier Flex MPO16 to 2xMPO8 OM4 10m Cable	



\*HPE Storage product

The above cables are fanned out approximately 2m from the 2xMPO8 end. E.g. S1H58A is 8m to where the cable splits to the 2xMPO8 ends and provides roughly 2m for each of the MPO8 ends.

### **MPO12 to 4x LC cables - Higher speed Short Reach transceiver to 4x lower speed transceivers**

SKU #	Description	Notes
K2Q46A	HPE Premier Flex MPO to 4xLC 5m Cbl	40G SR4 to 4x 10G SR; 100G SR4 to 4x25G SR
K2Q47A	HPE Premier Flex MPO to 4xLC 15m Cbl	
Q1H68A	HPE Premier Flex MPO to 4xLC 30m Cbl	
Q1H69A	HPE Premier Flex MPO to 4xLC 50m Cbl	

The above cables are fanned out approximately 2m from the 4xLC end. E.g. Q1H68A is 28m to where the cable splits to the 4xLC ends and provides roughly 2m for each of the LC ends.

If you buy cables from other internet sources, ensure that the cables are split in the following manner (for use with 100G SR4, or 40G SR4 transceivers):

MPO connector fiber numbers	LC connector	Logical interface (using port 1/1/52 as an example)
1 and 12	LC #1	1/1/52:1
2 and 11	LC #2	1/1/52:2
3 and 10	LC #3	1/1/52:3
4 and 9	LC #4	1/1/52:4



MPO connector fibers 5 through 8 are unused.

### **Compatible split optical transceivers to lower-speed transceivers**

The following optical transceivers can be split and downstream connect to a lower speed optical transceiver:



Not all QSFP ports can split even when using a "splittable" optic. See details for specific switch models in the QDD, QSFP28 and QSFP+ chapters. See information in the following section "Split capabilities of specific models".

Upstream Hi-speed transceiver	Downstream lower-speed transceiver	Notes
QDD 400G SR8	Multimode fiber, 16 fibers split into 4 groups of 4 to 100G SR2 (70m/OM3; 100m/OM4)	100G SR2 is not the same as 100G SR4. 100G SR2 requires only 4 fibers (1,2 & 11,12), using an MPO12 connector. The 400G SR8 uses an MPO16 broken out into four groups of four fibers for each 100G connection. Refer to <a href="#">400G Q-DD optical interoperability</a> .
QDD 400G eDR4	Single mode fiber, 8 fibers split into 4 groups of 2 fibers to 100G FR1. (2km reach)	Uses SMF MPO12 to 4x LC (2 fibers each) FR1 technology (2km) uses a different wavelength than 100G LR4.
QSFP28 100G SR4	Multimode fiber, 8 fibers split into 4 groups of 2 fibers to 25G SR or eSR (70m/OM3, 100m/OM4)	Uses MMF MPO12 to 4x LC Distance reach is limited by the 100G SR4 optic (OM3/70m; OM4/100m) 25G eSR is compatible, but you may get longer reaches than the above, but not as far as a 25G eSR to 25G eSR.
QSFP+ 40G SR4 or eSR4	Multimode fiber, 8 fibers split into 4 groups of 2 fibers to 10G SR (40G SR4: 70m/OM3, 100m/OM4 40G eSR4: 300m/OM3, 400m/OM4) Not compatible to connect to 10G LRM, nor use over OM1/OM2	Uses MMF MPO12 to 4x LC Distance reach is limited by the 40G SR4 optic (OM3/100m; OM4/150m). 40G eSR4 has longer reach (OM3/300m; OM4/400m) and matches the full potential reach of 10G SR optics.

### Split capabilities of specific models

Starting with AOS-CX 10.05, the following switches and modules are capable of splitting a QSFP+ or QSFP28 port with the noted restrictions. Configure the ports for split mode. 10.05 and 10.06 require the configuration to be saved and the switch to be rebooted to enable the split operation on the ports.

Starting with the 10.07 release, the need to save and reboot is now removed for the 8320, 8325, and 8360 series; the 8400 still requires a save and reboot (no support for split ports on the 6400 series).




---

The Aruba 8400 Switch Series still requires a save and reboot as of AOS-CX 10.10.1000.

---

Part number (PN)	Description/notes	Port info
<b>Aruba 6300 Series</b> S0E91A, S0X44A - models with 4x QSFP28 ports	No support for split ports. This is a Hardware limitation and cannot be enabled by any software update.	Contact product management if split use case is needed.
<b>Aruba 6400 Series</b>	V1 or v2 series: No support for split ports.	Contact product management if split



Part number (PN)	Description/notes	Port info
		use-case is needed.
<b>Aruba 8100 Series</b> R9W94A (R9W86A/R9W87A) - 24XF4C models  R9W95A (R9W88A/R9W89A) - 24XT4XF4C models	48 port models cannot split the QSFP28 ports as there not enough MACs in the system.	24XF4C models: 25-28 (40G or 100G) 24XT4XF4C model: 29-32 (40G or 100G) 48XF and 40XT8XF models cannot split the QSFP28 ports(not enough MACs)
<b>Aruba 8320 Series</b> - JL479A - JL579A - JL581A	Aruba 8320 48 10/6 40 X472 5 2 Bdl Aruba 8320 32 40G X472 5 2 Bdl Aruba 8320 48 T/6 40 X472 5 2 Bdl	49-54 (40G) 5-28 (40G, center 24 ports) 49-54 (40G)
<b>Aruba 8325 48Y8C models</b> JL635A (base system)	Base system SKU displayed by <b>show system</b> JL624A Aruba 8325-48Y8C FB 6 F 2 PS Bdl JL625A Aruba 8325-48Y8C BF 6 F 2 PS Bdl	49-56 (40G or 100G)
<b>Aruba 8325 32C models</b> JL636A (base system)	Base system SKU displayed by <b>show system</b> JL626A Aruba 8325-32C FB 6 F 2 PS Bdl JL627A Aruba 8325-32C BF 6 F 2 PS Bdl	1-32 (40G or 100G)
<b>Aruba 8360 32Y4C models</b> JL717A/JL717C(v2)(base system)	Base system SKU displayed by <b>show system</b> JL700A / JL700C (v2) Aruba 8360-32Y4C Prt2Pwr3F2PS Bdl JL701A / JL701C (v2) Aruba 8360-32Y4C Pwr2Prt3F2PS Bdl	33-36 (40G or 100G)
<b>Aruba 8360 16Y2C models</b> JL718A/JL718C(v2)(base system)	Base system SKU displayed by <b>show system</b> JL702A /JL702C (v2) Aruba 8360-16Y2C Prt2Pwr3F2PS Bdl JL703A /JL703C (v2) Aruba 8360-16Y2C Pwr2Prt3F2PS Bdl	17-18 (40G or 100G)
<b>Aruba 8360 48XT4C models</b> JL720A/JL720C(v2)(base system)	Base system SKU displayed by <b>show system</b> JL706A /JL706C (v2) Aruba 8360-48XT4C Prt2Pwr3F2PS Bdl JL707A /JL707C (v2) Aruba 8360-48XT4C Pwr2Prt3F2PS Bdl	No support for split ports. Limitation of MACs on this ASIC. This model does allow the use of the QSA28 (in ports 50 and 51 only) because it only uses 1 MAC per port.
<b>Aruba 8360-12C models</b> JL721A/JL721C(v2) (base system)	Base system SKU displayed by <b>show system</b> JL708A /JL708C (v2) Aruba 8360-12C Pwr2Prt3F2PS Bdl JL709A /JL709C (v2) Aruba 8360-12C Prt2Pwr3F2PS Bdl	1-12 (40G or 100G)

Part number (PN)	Description/notes	Port info
<p><b>Aruba 8360 24XF2C models</b> JL722A/JL722C(v2)(base system)</p> <p><b>Aruba 8360 48Y6C models</b> JL719C (base system)</p>	<p>Base system SKU displayed by <b>show system</b> JL710A /JL710C (v2) Aruba 8360-24XF2C Prt2Pwr3F2PS Bdl JL711A /JL711C (v2) Aruba 8360-24XF2C Pwr2Pwr3F2PS Bdl</p> <p>Base system SKU displayed by CLI <b>show system</b> JL704C (v2) Aruba 8360-48Y6C v2 FB 5F 2AC Bdl JL705C (v2) Aruba 8360-48Y6C v2 BF 5F 2AC Bdl</p>	<p>25-26 (40G or 100G)</p> <p>49-54 (40G or 100G) MACsec available on ports 53-54 and available to the split 10G or 25G links through ports 53-54</p>
<b>Aruba 8400X modules</b>	<p>JL365A Aruba 8400X 8p 40G QSFP+ Adv Mod JL366A Aruba 8400X 6p 40G/100G QSFP28 Adv Mod</p>	<p>1-8 (40G) 1-6 Only capable of 40G split into 4 x 10G JL366A modules do not have 25G MACs to support split 100G</p>
<b>Aruba 9300 32D models</b> R8Z96A (base system)	<p>Base system SKU displayed by CLI <b>show system</b> R9A29A Aruba 9300 32D 32D2XF FB 6F2AC Bdl R9A30A Aruba 9300 32D 32D2XF BF 6F2AC Bdl</p>	<p>1-32 (40G, 100G, 200G, 400G)</p>
<b>Aruba 9300S 32C8D models</b> S0F95A-TAA Base S0F96A-Base	<p>Base system SKU displayed by CLI <b>show system</b></p> <p>S0F81A HPE ANW9300S 32C 8D FB 6Fs AC TAA Bdl S0F83A HPE ANW 9300S 32C 8D BF 6Fs AC TAA Bdl S0F84A HPE ANW 9300S 32C 8D BF 6Fs AC Bdl</p> <p>S0F87A HPE ANW 9300S 32C 8D BF 6Fs DC TAA Bdl S0F88A HPE ANW 9300S 32C 8D BF 6Fs DC Bdl</p>	<p>Ports 1-8 and 33-48 can not be split but are capable of using the QSA28 adapter.</p> <p>The 9300S uses split profiles: <b>system interface-profile split &lt;NAME&gt;</b> "profile-1" maximizes 100G downstream splits (16 ports: 9-12 &amp; 29-32 can do 2x100G; QDD ports 17-24 can do either 2x or 4x 100G) "profile-2" maximizes 25G downstream splits (10 ports: 13,15-17, 19, 21, 23, 25-27) Refer to the AOS-CX Fundamentals Guide for Aruba 9300 Switch Series for more information about the <b>system interface-profile</b> command.</p>

Part number (PN)	Description/notes	Port info
<b>Aruba 10000 models</b> R8S96A (base system)	Base system SKU displayed by CLI <b>show system</b> R8P13A Aruba CX 10000-48Y6C FB 6F 2PS Bdl R8P14A Aruba CX 10000-48Y6C BF 6F 2PS Bdl	49-54 (40G or 100G)



Aruba 6400 modules with QSFP28 ports do not have Split Mode enabled in AOS-CX as of 10.10 or earlier releases. AOS-Switch products do not allow splitting of QSFP+ ports (5400R, 3810M, 2930M).

Refer to the "Aruba-Corning 400G Cable Reference Guide" on the [Aruba Support Portal](#) for more split optical cables specifically for use with 400G products. 400G split into different lower speeds (200G or 100G) depending on the 400G optic you are using (400G SR8 or eDR4) and the 100G technology you are using (100G SR4, SR2 or FR1) on the far end of the link.

## Optical parameters

This guide provides average transmit and receive power ranges for transceiver modules. Transceivers are manufactured to meet the specifications (usually of the IEEE standards) and ranges represent the values that the part can operate within. The fact that one part can be at the lower end of the range, while another part can be at the upper range means that the part is compliant.

### Transmit power

Transmit power is the power at which the transmitter of an optical transceiver module transmits optical signals in dBm.

### Receive sensitivity

Receive power is the power at which the receiver of an optical transceiver module receives optical signals, in dBm. When the signal received is outside of the range, there is a risk of bit errors and a suboptimal data link.

### Using attenuators (for short test cables)

Transceivers are designed to transmit light pulses at power levels that account for loss in the fiber optic cabling, and meets the receiver input thresholds of the link partner optical transceiver.

If you are using a fiber cable with less light loss than expected (for example, in a test environment and you do not have a 40km spool of SMF available), use attenuators to reduce the transmit level to be within the receive sensitivity of the other transceiver. You will need to condition both fibers (sends in both directions). If not done, you risk overdriving the Receive end, resulting in either a non-operational link or permanently damaging the transceiver. For example, a 40G ER4 transceiver has the following optical specifications:

- Tx range: -2.7 dB to 4.5 dB
- Rx range: -21.2 dB to -4.5 dB

*Attenuation required = (highest transmit power) - (highest receive sensitivity)*

### Allowable link loss on fiber runs

A related topic to attenuation is how much link loss is allowable for a reliable use of transceivers from end-to-end. For runs longer than 10 km a cable installer can run a test to determine what a fiber run has as the loss value (measured in dB). Long single mode fiber runs naturally have attenuation (loss of light power) over the run. Patch panel connections and fiber fusion points add to loss value. While Tx power values are usually strong, and the Rx sensitivity is higher meaning that the lower the Rx values translate to more sensitivity).

Consider a 100G ER4 transceiver that has the following optical specifications:

- Rx range: -20.5 dB to -3.5 dB
- TX range: -2.5 dB to 6.5 dB

*Allowable link loss = (minimum receive sensitivity) - (minimum transmit power)*

-20.5 - (-2.5) is equal to 18 dB which is the loss that can be tolerated. If the link measurement is less than 18 dB over the entire run, you should expect good results from using the 100G ER4 xcvr. Most xcvr vendors can tolerate a bit more, however the results are not guaranteed nor are they compliant with IEEE standards.

## Copper transceiver modules

Copper transceiver modules transmit signals over Category-5, -5e, -6, and -6a unshielded twisted pair (UTP) or shielded twisted pair (STP). UTP transmission cover shorter distances than fiber transmission and can be used in small-sized networks only. 10G over twisted pair requires the use of Category 6a to achieve the full 100m per the 10GBASE-T standard.

1G copper transceivers are supported in 1G SFP and 10G SFP+ (and most SFP28 and SFP56) ports where listed in the compatibility tables. See the specifics for each switch model. 1G optics may not be supported in uplink ports (usually due to support for higher speed MACsec capabilities). 10G Copper transceivers are supported in 10G/25G and 50G SFP ports.

## Transmission distance

Through unshielded or shielded twisted pair (UTP/STP) cables signals can only be transmitted over a distance of 100 m (328.08 feet). This behavior occurs because signals attenuate during transmission through the UTP cables.

Attenuation refers to the dissipation of the power of a transmitted signal as it travels over a cable.

Attenuation occurs because signal transmission suffers certain resistance from the cable, which weakens the signals as they travel over the cable. When signals are transmitted over a long distance, signal strength decreases significantly, causing the signal-to-noise ratio to drop below the accepted level. This decrease makes it impossible to distinguish between signals and noise, which results in data loss.

Patch panel and punch down blocks also affect attenuation; that is, they can be a source of issues resulting in shorter distances or data loss.

10GBASE-T connections require Category 6a as a minimum for proper 10G speeds up to the 100m distance dictated by the IEEE 802.3ae standard for a fixed 10GBASE-T port. The JL563A/JL563B transceiver has a limit of 30m max distance due to limited power available to the transceiver (vs a fixed 10GBASE-T port). Anything less (Cat 6, 5e, 5) will compromise the distance that 10G over copper can achieve.


Shielded Twisted Pair (STP) Cat 6a cable is recommended when using the 10GBase-T transceiver (JL563A/JL563B).

Use of STP prevents EMI events from affecting data traffic carried on the wire - known as Crosstalk or Alien Crosstalk. Large EMI events from electronically noisy environments may be coupled onto

unshielded cabling and cause temporary packet errors. Fixed 10G ports have designs to counteract these types of bit error conditions, that the 10GBASE-T transceiver cannot counteract consistently. Using STP Cat6a cables mitigate the errors significantly. All packet loss errors observed in extensive testing are considered recoverable by the host system with the JL563A/JL563B transceiver.

## Connector

Registered Jack-45 (RJ-45) twisted-pair connectors are used as connectors for copper transceiver modules.

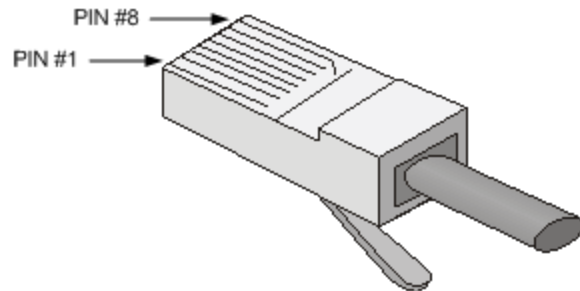

### ***RJ-45 GE connector pin assignment for gigabit connections***

Pin	Signal	Function
1	MX_0+	Data transmit/receive
2	MX_0-	Data transmit/receive
3	MX_1+	Data transmit/receive
4	MX_2+	Data transmit/receive
5	MX_2-	Data transmit/receive
6	MX_1-	Data transmit/receive
7	MX_3+	Data transmit/receive
8	MX_3-	Data transmit/receive

## Identification of 4x4 part numbers

A SKU# (Stock Keeping Unit, also called a Product Number or Part Number) may be fulfilled by one or more vendor parts providing similar functionality. A 4x4 (or "4 by 4") part number is of the form *nnnn-nnnn* and is printed on the transceiver, DAC, or AOC label. For example, J9151E (10G LR) may have 1990-4727 or 1990-4694 as the associated 4x4 part number representing two different vendors.

4x4 part numbers are referenced in the:

- specification tables, to identify parts that support DOM (Digital Optical Monitoring) capabilities. (Some older vendor parts do not support DOM.)
- compatibility tables, where necessary, to identify supported combinations of switch or module with the identified transceiver, along with the minimum software version required.

In December 2017, Aruba introduced Revision D (and, in 2019, a Rev E 10G LR optic) versions of 100M, 1G, and 10G products. Revision D transceivers and DACs eliminated previous alternative vendors, so that you can be assured that only certified vendor parts are supported on AOS-CX Series Switch

products. Earlier Revision A, B, or C product may have alternative vendors that Aruba no longer actively ships, but remain fully supported in specific switches. The specifications for Revision D transceiver products are the same as the specified Revision A, B, and C SKUs. Where support for a Revision A, B, or C transceiver existed on an earlier switch product, Revision D parts are also supported.

Some switch products will specify Revision D (and, in some cases, Rev E 10G LR optic) transceivers for full support, while other products may support earlier (older) revision transceivers – and some with specific 4x4 part numbers.

To cross-reference the Transceiver/DAC product against the switch product to identify the minimum software required for transceiver support, always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers. Refer to the compatibility tables within this document.

To use CLI commands to display data for an installed transceiver, see the following examples.

```
switch# show int 1/10/6 transceiver
```

Port	Type	Product Number	Serial Number	Part Number
1/10/6	QSFP+SR4	JH231A	XX57nnnnnn	1990-5555

```
switch# show interface dom
```

Port	Type	Lane	Temp (C)	Voltage (V)	Tx Bias (mA)	Rx Power (dBm)	Tx Power (dBm)
1/1/1	SFP+SR		47.65	3.31	8.40	-10.96	-2.49
1/1/2	SFP+SR		n/a	n/a	n/a	n/a	n/a
1/1/3	SFP+DAC3		42.10	3.24	n/a	n/a	n/a
1/1/4	unknown		??	??	??	??	??
1/1/5	unknown		??	??	??	??	??
1/1/6	unknown		??	??	??	??	??
1/2/1	QSFP+SR4	1	44.46	3.30	6.12	-10.96	-1.95
		2	44.46	3.30	6.04	-10.96	-2.00
		3	44.46	3.30	6.51	-10.96	-2.16
		4	44.46	3.30	6.19	-10.96	-1.94
1/2/2	unknown		??	??	??	??	??
1/2/3	unknown		??	??	??	??	??
1/2/4	SFP+SR@		47.65	3.31	8.40	-10.96	-2.49

```
switch# show interfaces transceiver f2 detail
```

```
Transceiver in F2
  Interface Index   : 162
  Type              : QSFP+SR4
  Model             : JH231A
  Connector Type    : MPO
  Wavelength        : 850nm
  Transfer Distance : 100m (50um OM3), 150m (50um OM4)
  Diagnostic Support : DOM
  Serial Number     : XX57nnnnnn
```

```
Status
  Temperature : 33.332C
  Voltage      : 3.3208V
```

Channel#	Tx Bias (mA)	Rx Power (mW/dbM)	Tx Power (mW/dbM)

```

-----
1          6.904      0.5622, -2.501 0.5822, -2.349
2          6.706      0.5922, -2.275 0.5856, -2.324
3          6.894      0.6321, -1.992 0.5813, -2.356
4          6.792      0.5111, -2.915 0.5651, -2.479
Current Alarms:
  Channel 1 :
    Tx bias low alarm
    Rx power low warning
  Channel 2 :
    Tx bias low alarm
    Rx power low warning
Current Errors:
  Channel 1 :
    Rx Loss of Signal
  Channel 2 :
    Rx Loss of Signal
  Channel 3 :
    Rx Loss of Signal
  Channel 4 :
    Rx Loss of Signal

```

## Unsupported transceiver mode

The term transceiver applies collectively to optical transceivers, DAC and AOC cables, and port adapters. The **allow-unsupported-transceiver** (UT-mode) command allows usage of non-Aruba/HPE transceiver products. Allowing the use of unsupported products in Aruba switches can assist in the initial installation or validation of switching products while you obtain fully supported products.

The term "third-party transceiver" applies to transceiver parts not specifically identified on data sheets or in this guide. Transceivers sold by Aruba for use on other switches/controllers not listed within this guide (for example, transceivers specified for Comware Switches) or sold by HPE for use on HPE Servers or Storage devices are also considered "third-party". This guide indicates the specific transceiver products and minimum software version required for full support. Older generation transceivers may not be fully supported on newer generations of switch models. For questions, contact your Aruba Account Team who can get clarity from Aruba Product Line management.

Using third-party products present these caveats:

- An unsupported transceiver is used by the customer at their own risk.
- Aruba assumes no liability to ensure the proper operation of a product not designed/designated as supported, even from future revisions of AOS-CX firmware.
- No guarantees are implied that a third-party transceiver will continue to work from release to release.
- Third-party transceiver products are not under the control of Aruba, so Aruba has no knowledge of changes in design or consistency and cannot vouch for the quality of the third-party part, nor any assurance that the parts are the same from time to time.

UT-mode is implemented in the following switch series:

- AOS-S 16.02: 5400R, 3810M, 2930M/2930F, 2930, 2920 2540, and 2530 (1G-40G)  
There may be other products that can also run 16.02 switch code, but UT-mode is not extended to those switch series. UT-mode is NOT enabled by default on AOS-S product. You must issue the CLI command for the capability to be allowed.
- AOS-CX 10.05.0001: all AOS-CX Switch Series (1G- to 10G only)

- AOS-CX 10.09.0002: 8360, 8325, 8320, and 10000 (1G to 100G) enabled by default
- AOS-CX 10.10.0002: 8400, 6xxxx Switch Series (1G to 100G) enabled by default
- AOS-CX 10.10.1000: 8100 Switch Series (up to 100G) enabled by default
- AOS-CX 10.11.0001: 9300 32D (40G to 400G) enabled by default




---

100Mbps may still be limited on some models to only support Aruba 100FX transceivers

---




---

There is no guarantee that an unsupported transceiver WILL be enabled; however, it can be attempted.

---

The UT-mode command (particularly on an AOS-Switch) may require an acknowledgment of the support risk before use. An example CLI session may look like this:

```
switch(config)# allow-unsupported-transceiver
Warning: The use of unsupported transceivers, DACs, and AOCs is at your own risk
and may void support and warranty. Please see HPE Warranty terms and conditions.

Do you agree and do you want to continue (y/n)?
```

## Supported vs unsupported

Simply because a part is enabled for use, does not mean that it is "supported".

- Supported products are listed and covered by the terms found on the [Product Warranty and Support](#) page.
- Supported products warranty can be extended (beyond the typical warranty) with a Support Contract.
- When it is determined that an issue may involve questionable connectivity using an unsupported transceiver (optics/DACs/AOCs), the Technical Assistance Center (TAC) may ask that you replace the third-party transceiver with a product supported for use with Aruba switches before continuing troubleshooting activities. The support call will be paused until this is done, eliminating the suspicion of the third-party transceiver as a possible issue.
- Even if a product displays a part number as one of the "supported" product part numbers, if the TAC discovers that the part is not a bonafide Aruba or HPE part (that is, a counterfeit or a compatible product), they may elect to halt the support call. Damage to the switch or port would not be covered under warranty.
- The CLI command **show interface transceiver detail** may display unreliable information (for example, DOM). The accuracy of the electronic information in third-party products is unknown to and not verified by Aruba. The information is reported on a best-effort basis. AOS-CX software may or may not use any information provided by a third-party/unsupported transceiver.

This guide details products that are supported by a switch model or module. In some cases, a particular switch model or module may not have the proper hardware or software support to allow a transceiver technology to work at all. This guide denotes that limitation with a comment about "or any type of technology" - even with UT-mode that type of transceiver most likely will not work. For example: J9152A/J9152D (or any type of 10G LRM technology) is not supported in any 2930F model.

Transceiver products (including DACs and AOCs) have identification information within the product - this information is read when the transceiver is inserted into the switch. Aruba switches use this information to validate whether the part is a "supported" product. If not, it is officially "unsupported" and usually shown as such.



Some considerations for third-party products:

- Do they follow the guidelines agreed upon by Multi-Source Agreement (MSA) vendors? MSA specifications dictate many physical characteristics, but not necessarily the electrical designs. For that reason, a transceiver may work in one switch/module, but not in another due to design differences not taken into consideration for fully supported products.
- Many low-cost products do not properly code the MSA required fields for type, distance, media type among other fields, or they may incorrectly identify the part, causing the switch to enable them with settings not appropriate for the type of transceiver inserted.
- Does the part work the way the Aruba switches expect them to? Aruba 'tunes' ports according to the characteristics of selected parts.
- Third-party products may substitute a different vendor part from time to time. The third-party product you buy today may work, but the part you buy a month from now could be a different part. There are no guarantees.

Hewlett Packard Enterprise Company consists of different divisions and product families (often times by recent acquisitions). The Aruba division is one of these many divisions. Transceiver products that are designed to work with specific HPE division products, may not work properly on Aruba switches. For this reason, until the Aruba division has done the development work to certify other HPE division products work on Aruba switches, those products may be identified as third-party, and their complete operation and full support is not absolutely certain.

## Glossary of terms

Term	Description
AOC	Active Optical Cable. Similar to a DAC, but uses active components similar to short reach optics, and has an applicable fiber cable permanently attached to both ends. AOCs are typically easier to implement since they mimic a short reach transceiver.
AOS/Aruba-OS	Aruba Operating System. Usually reserved for Wireless LAN products.
AOS-CX	Aruba OS-CX for the CX line of switching product sold by Aruba. First introduced June 2017.
AOS-S or AOS-Switch	Aruba OS-Switch. Operating system name for earlier generation switches sold by Aruba under the former name of HPE Networking (aka "ProCurve Networking").
APC	Angled Physical Contact. Ends of the fiber ferule are at an 8° polished angle. These must mate to a matching APC point. APC reduce reflected light loss and are used for demanding applications such as 400G connections. See UPC and the Overview chapter.
Cat5e, Cat6a	Category 5e, Category 6a ethernet twisted pair cable. 1Gigabit speeds requires at least Cat5e cable (more twists per foot compared to Cat5 or Cat5a cable). 10G speeds over twisted pair requires at least Cat6a to reach 100m (the max distance supported by Ethernet over twisted pair).
CLI	The text-based interface used when one connects to a switch (console, telnet, or SSH).
DAC	Direct Attach Copper- A copper cable assembly, consisting of pluggable connectors on both ends - these resemble transceivers, but they lack the active electronics of an optical transceiver. The nature of DAC cables is that they present a "wire" from one switch transceiver port to the other transceiver port (switch to switch, or switch to server adapter). DAC cables can be more difficult to ensure end-to-end compatibility

Term	Description
	due to the nature of both devices must be able to recognize the part and properly tune electrical characteristics. Switches may have to adjust tunings depending on how far one port is from the main switching ASIC versus another port that is closer. Server adapters don't necessarily have this issue with only 1 to 4 ports to deal with.
DOM/DDM	Digital optical monitoring (DOM) - Used to monitor some parameters of the transceiver in real time which helps to identify the location of the fiber link failure, simplify maintenance, and improve system reliability. DOM allows you to monitor the Tx (transmit) and Rx (receive) power of the module, temperature, and transceiver supply voltage. DOM status is polled when the <b>show interface dom</b> command is issued. Digital diagnostic monitoring (DDM) is an alternate term for the same feature.
LC	Lucent Connector. See Overview chapter - Connector types.
MMF	Multimode Fiber. Usually used for short runs (less than 400m for 10G and higher).
MPO	Multifiber-Push-On/Off connector - Connector types. E.g. MTP is a brand name of a type of MPO connector. Refer to the Overview chapter for additional details.
MPO12 or MPO16	An MPO connector with 12 or 16 fibers. See the Overview chapter for more details.
nm	Nanometer. Used to specify the wavelength used in optical transmissions. A nm is one-billionth of a meter or 1/1000,000,000.
NRZ	Non-Return to Zero - A method of encoding pulses that uses opposite and alternating high and low levels representing a 0 (low) or 1 (high) and there is no return to a zero between encoding pulses. A signal transmitting at ~25Ghz effectively transmits 25G bits of data (see PAM4).
NSP	HPE Aruba Networking Support Portal. ( <a href="https://networkingsupport.hpe.com">https://networkingsupport.hpe.com</a> ). Formerly known as ASP (Aruba Support Portal).
PAM4	Pulse Amplitude Modulation 4 levels - A method of encoding 4 bits of data by using 4 levels of signaling. A signal transmitting at ~25Ghz effectively transmits 50G bits of data since each pulse is now transmitting 2 bits of data in each clock pulse (see NRZ).
Q-DD or QSFP-DD	QSFP Double-Density - Double the density/bandwidth of a QSFP56 or 400G. QSFP-DD is backward compatible to accept QSFP56, QSFP28 or QSFP+ pluggables. Depending on the switch port hardware, QSFP-DD.
QSFP+	Quad Small Formfactor Pluggable (Plus) - Term used for 40G type of ports (see QSFP28 and other QSFP). Depending on the switch port hardware, QSFP+ can be split into 4x 10G links using appropriate hardware (parallel optics, Split-DACs or Split-AOCs).
QSFP28	Quad Small Formfactor Pluggable 28 Gigahertz - Used by ports that use a 25G channels x 4 (quad) resulting in a 100Gb connection. QSFP28 ports are usually backward compatible to accept 40G QSFP+ pluggables. Depending on the switch port hardware, QSFP28 can usually be split into 4x 25G or 4x 10G links using appropriate hardware (parallel optics, Split-DACs or Split-AOCs).
QSFP56	Quad Small Formfactor Pluggable 56 Gigahertz - Used by ports that use a 25G channels using PAM4 encoding, resulting in 4 channels of 50G or a 200Gb connection. QSFP56 ports are usually backward compatible to accept QSFP28 100G and QSFP+ 40G QSFP+ pluggables. Depending on the switch port hardware, QSFP56 may split into 2x100G, 4x50G, 2x50G, or 4x 25G or 4x 10G links using appropriate hardware (parallel optics, Split-DACs or Split-AOCs).
SFP	Small Formfactor Pluggable - Smaller transceiver port, same physical dimensions for

Term	Description
	100Mb, 1G, 10G 25G and 50G parts (optics, DAC cables, AOCs).
SMF	Singlemode Fiber - Usually used for longer runs.
SN	Senko Nano connector - Invented by Senko. SN connectors are vertically oriented duplex fiber connectors allowing for side-to-side stacked into QDD 400G pluggables, providing for a "split" optic without using an MPO to split LC cable assembly.
TAA	Trade Agreement Act - A USA regulation requirement for product to be manufactured/assembled in countries that meet the US Trade Agreement Act of 1979.
TRX	Alternative abbreviation for Transceiver (shortened version of xcvr).
UPC	Ultra Physical Contact - Ends of the fiber ferule ground to a more precise level than "PC" See APC and the Overview chapter.
UTM	UT-mode, or Unsupported Transceiver Mode - See Overview chapter.
UTP/STP	Unshielded Twisted Pair / Shielded Twisted Pair - Copper cables to support ethernet speeds from 10 Megabits (10M), 100 Megabits (100M), 1000 Megabit or 1 Gigabit(1G) to 10 Gigabits (10G). Cables made up of pairs of wires that are twisted (to reject electromagnetic interference) - "twisted pairs".
xcvr	Transceiver - A combination of "X" for Transmitter and Receiver.

Always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers.

400 Gigabit Ethernet in Aruba systems use QSFP-DD ports. Q-DD ports are available on select models within the CX product family.

Quad Small Form-Factor Pluggable Double-Density products provide up to 400 Gb/s of data bandwidth. QSFP-DD builds on the existing QSFP physical form-factor to provide 50Gb/s bandwidth per channel using 4-level Pulse Amplitude Modulation (PAM4) technology. The Double-Density module and connector design increases the number of high-speed data channels from four to eight for an aggregate bandwidth of 400Gb/s (8x50Gb/s). Aruba uses the abbreviation of Q-DD interchangeably for QSFP-DD.

See more information about QSFP-DD, PAM4 vs NRZ along with MPO16, MPO12 connector types in the Overview chapter.

### QSFP-DD, QSFP56, QSFP28, and QSFP+ compatibility

QSFP-DD ports can accommodate QSFP-DD, QSFP56, QSFP28 and QSFP+ products. QSFP-DD products cannot be used in QSFP56, QSFP28, or QSFP+ ports. Although the products may appear to be the same physical size, QSFP-DD products incorporate an extra row of connections for the Double-Density capability that QSFP-based products do not include.

#### **QSFP-DD optical transceiver modules**



## Models, specifications, and compatibility

### Specifications for QSFP-DD optical transceiver module

Product name (SKU)	DOM-Digital Optical Monitoring	Nominal wl (nm)	Fiber mode & connector type	Fiber Diameter	Modal Bandwidth	Distance
Aruba 400G Q-DD MPO16 SR8 100m MMF xcvr (R9B41A)	Yes	Eight lanes: 850 8x50G PAM4	MMF MPO16 (APC)	50/125	2000 (OM3)	70 m (229.6 ft)
					4700 (OM4 & OM5)	100 m (328.0 ft)
HPE Aruba Networking 4x100G DR QSFP-DD SN 500m SMF Transceiver (S3N90A)	Yes	Per SN channel One lane, 1310, 1x 100G PAM4  Connects to 100G DR (S3N88A) (not compatible to 100G SR4)	SMF 4xSN (UPC)	9/125	N/a	500 m (1640.42 ft)
HPE Aruba Networking 400G DR4 QSFP-DD MPO12 500m SMF Transceiver (S3N93A)	Yes	Four lanes, 1310, 4x 100G PAM4	SMF MPO12 (APC)	9/125	N/a	500 m (1640.42 ft)
Aruba 400G Q-DD MPO12 eDR4 2km SMF xcvr (R9B42A)	Yes	Four lanes, 1310, 4x 100G PAM4	SMF MPO12 (APC)	9/125	N/a	2 km (1.24 miles)
HPE Aruba Networking 4x100G FR QSFP-DD SN 2km SMF Transceiver (S3N91A)	Yes	Per SN channel One lane, 1310, 1x 100G PAM4  Connects to 100G FR1 (R9B63A) (not compatible to 100G SR4)	SMF 4xSN (UPC)	9/125	N/a	2 km (1.24 miles)
HPE Aruba Networking	Yes	Per SN channel One	SMF 4xSN (UPC)	9/125	N/a	10 km (6.21 miles)

Product name (SKU)	DOM-Digital Optical Monitoring	Nominal wl (nm)	Fiber mode & connector type	Fiber Diameter	Modal Bandwidth	Distance
4x100G LR QSFP-DD SN 10km SMF Transceiver (S3N92A)		lane, 1310, 1x 100G PAM4  Connects to 100G LR (S3N89A) (not compatible to 100G LR4)				
HPE Aruba Networking 400G PLR4 QSFP-DD MPO12 10km SMF Transceiver (S3N94A)	Yes	Four lanes: 1310, 4x 100 PAM4	SMF MPO12 (APC)	9/125	N/a	10 km (6.21 miles)



400G SR8 are not supported for use over OM1/OM2 multimode fiber.

The IEEE standard did not specify any requirements for use over these lower quality multimode fiber.

The MPO16 and MPO12 connectors must be APC (Angled Physical Connector) when connecting to 200G, 400G transceivers to achieve the distance stated above. See the Overview chapter regarding APC vs UPC.

Please refer to the "Aruba-Corning 400G Cable Reference Guide" on the [HPE Networking Support Portal](#) for more split optical cables specifically for use with 400G products. 400G optics can be split into lower speeds (refer to [400G Q-DD optical interoperability with slower speed optics](#) for additional details).

#### Optical specifications for QSFP-DD optical transceiver modules


Product name (SKU)	Optical parameters (dBm)	
	Transmit power	Receive power
Aruba 400G Q-DD MPO16 SR8 100m MMF xcvr (R9B41A)	-6.5 to +4.0	-8.4 to +4.0
HPE Aruba Networking 4x100G DR QSFP-DD SN 500m SMF Transceiver (S3N90A)	-2.9 to +4.0	-5.9 to +4.0
HPE Aruba Networking 4x100G FR QSFP-DD SN 2km SMF Transceiver (S3N91A)	-3.1 to +4.0	-7.1 to +4.0
HPE Aruba Networking 4x100G LR QSFP-DD SN 10km SMF Transceiver (S3N92A)	-1.9 to 4.8	-8.2 to 4.8
HPE Aruba Networking 400G DR4 QSFP-DD MPO12 500m SMF Transceiver (S3N93A)	-2.9 to +4.0	-5.9 to +4.0
Aruba 400G Q-DD MPO12 eDR4 2km SMF xcvr (R9B42A)	-3.1 to +4.0	-7.1 to +4.0
HPE Aruba Networking 400G PLR4 QSFP-DD MPO12 10km SMF Transceiver(S3N94A)	-1.9 to 4.8	-8.2 to 4.8

### Compatibility for the QSFP-DD transceiver modules

QSFP-DD capable product name	SKU	Minimum software required	Comments
Aruba 9300 Switch Series	-32D models R8Z96A-Base R9A29A FB R9A30A BF	R9B41A, R9B42A: 10.10.1000  S3N90A, S3N91A, S3N92A, S3N93A, S3N94A: 10.13.1010	High-line AC voltage is required to support more than 8 products (200-240 VAC). Bench testing the 9300 32D with low line voltage may not be able to properly power up more than 8 products.  For the 9300 32D model: QSFP-DD(Q-DD) products can not be used in QSFP28(100G) or QSFP+(40G) ports.
Aruba 9300S Switch Series	-32C8D models S0F95A-TAA Base S0F96A-Base S0F81A FB TAA S0F82A FB S0F83A BF TAA S0F84A BF S0F87A BF DC TAA S0F88A BF DC	R9B41A, S3N90A, S3N93A, R9B42A, S3N91A, S3N92A, S3N94A: 10.14.0001	QSFP-DD (Q-DD) products cannot be used in QSFP ports (1-16 and 25 - 40) on the 9300S.


## 400G Q-DD optical interoperability with slower speed optics

QSFP-DD 400G SR8 is eight channels of 50G PAM4 short reach (MMF) and can be configured into 4 groups of 2x50G, compatible with the 100G SR2 optic (not the same as 100G SR4). Use the CLI command: **split 4 100** on the Q-DD port hosting the R9B41A 400G SR8 optic.

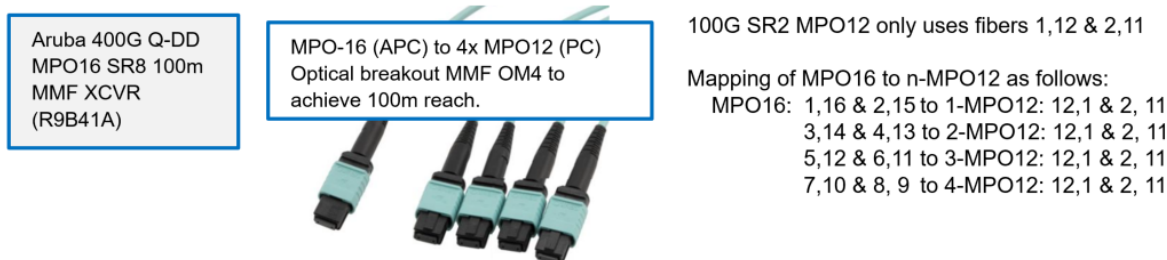

QSFP-DD 400G eDR4 is four channels of 100G PAM4 long reach (2km, SMF) split into four pairs of SMF to 100G FR1 PAM4 QSFP28 optics.

Use the CLI command: **split 4 100** on the Q-DD port.

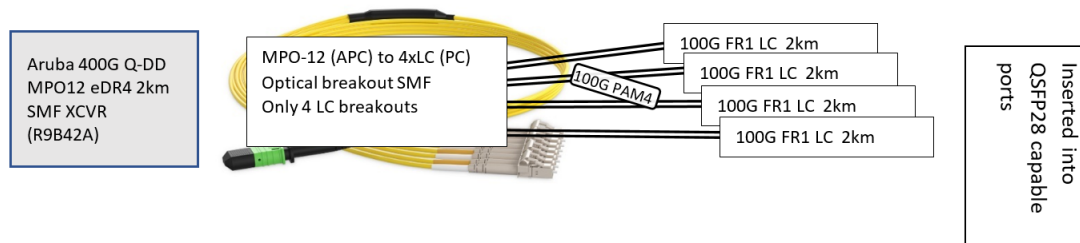



A split 400G eDR4 is compatible with regular QSFP28 100G LR4 (which are 4-channel 25G NRZ).



## 400G Q-DD to Q-DD and Q-DD to split QSFP56 AOC (active optical cables)

Always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers.




QSFP-DD (Q-DD) end can NOT be used in QSFP28 nor QSFP+ ports

Refer to the section later in this guide “HPE Servers and Systems Support” for use cases of 400G and 200G split cables when used with validated HPE Server and HPE Storage adapters.

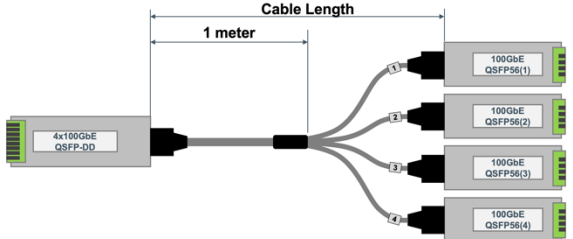Product name (SKU)	Cable length	Data rate
<b>QDD to QDD Active Optical Cables (400G to 400G)</b>		
Aruba 400G Q-DD to Q-DD 3m AOC (R9B45A)	3m	400G to 400G Active Optical Cables.  These cables will only work in a QSFP-DD capable port.
Aruba 400G Q-DD to Q-DD 7m AOC (R9B43A)	7m	
Aruba 400G Q-DD to Q-DD 15m AOC (R9B47A)	15m	
Aruba 400G Q-DD to Q-DD 30m AOC (R9B46A)	30m	
Aruba 400G Q-DD to Q-DD 50m AOC (R9B44A)	50m	
<b>QDD to 4x QSFP56 100G Active Optical Cables</b>  The following cables split 1m from the QSFP DD end.  The 100G split ends only operate in a QSFP56 compatible port (not the same as a 100G QSFP28 port)		
Aruba 400G Q-DD to 4xQSFP56 100G 3m AOC (R9B50A)	3m	A split 400G port into 4x 100G speed ports.  Requires a QSFP56 port on the far end. See list of validated QSFP56 adapters in the " <a href="#">Support for HPE Servers and Systems</a> " section.  These cables will not work in a QSFP28 100G port.
Aruba 400G Q-DD to 4xQSFP56 100G 7m AOC (R9B48A)	7m	
Aruba 400G Q-DD to 4xQSFP56 100G 15m AOC (R9B52A)	15m	
Aruba 400G Q-DD to 4xQSFP56 100G 30m AOC (R9B51A)	30m	
Aruba 400G Q-DD to 4xQSFP56 100G 50m AOC	50m	

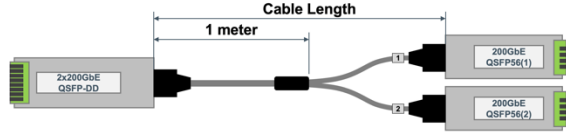

Product name (SKU)	Cable length	Data rate
(R9B49A)		
<p><b>QDD to 2xQSFP56 200G Active Optical Cables</b></p> <p>The following cables split 1m from the Q-DD end.</p> <p>The Q-DD end configures the Q-DD port to run in 2x 200G mode.</p> <p>The split ends only operate in a 200G QSFP56 compatible port.</p>	 <p>Refer to <a href="#">Splitting of QSFP+ and QSFP28 ports</a> for additional information.</p>	
Aruba 400G Q-DD to 2xQSFP56 200G 3m AOC (R9B55A)	3m	Split 400G port into 2x 200G speed ports.
Aruba 400G Q-DD to 2xQSFP56 200G 7m AOC (R9B53A)	7m	Requires a QSFP56 port on the far end.
Aruba 400G Q-DD to 2xQSFP56 200G 15m AOC (R9B57A)	15m	These cables will not work in a QSFP28 100G port.
Aruba 400G Q-DD to 2xQSFP56 200G 30m AOC (R9B56A)	30m	
Aruba 400G Q-DD to 2xQSFP56 200G 50m AOC (R9B54A)	50m	


#### Compatibility for the QSFP-DD transceiver modules

QSFP-DD capable product name (SKU)	Minimum software required	Comments
Aruba 9300 Switch Series -32D models	QDD-QDD and QDD-split QSFP56 cables: 10.10.1000	Either end can be used in the 9300 32D (Q-DD ports support QSFP56 and Q-DD). QSFP-DD (Q-DD) products can not be used in 100G QSFP28 or in 40G QSFP+ ports.
Aruba 9300S Switch Series -32C 8D models	QDD-QDD and QDD-split QSFP56 cables: 10.14.0001	QDD or QSFP56 end can be used in the 9300S Q-DD ports. QSFP56 end can be used in the 9300S QSFP56 or QDD ports.  QSFP-DD (Q-DD) products cannot be used in 100G QSFP28 or in 40G QSFP+ ports.

### 200G Q-DD to split QSFP28 AOC (active optical cables)

Always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers. These 200G Q-DD cables automatically configure a Q-DD port to operate in 4-channel QSFP28 mode. Because of the 2xQSFP28 ends, this limits the Q-DD port to 200G (2 channels of 100G each).

### Specifications for QSFP-DD optical transceiver module

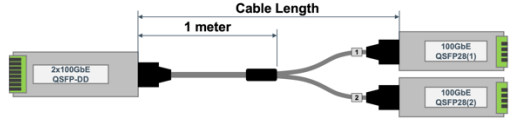Product name (SKU)	Cable length	Data rate
The following cables split 1m from the QSFP-DD end.	 <p>The diagram shows a cable starting with a 2x100GbE QSFP-DD module on the left. A dimension line above the cable indicates a length of 1 meter from this module to the point where the cable splits into two separate cables. Each of these two cables ends with a 100GbE QSFP28 module, labeled (1) and (2) respectively.</p>	
Aruba 200G Q-DD to 2xQSFP28 100G 3m AOC (R9B60A)	3m	200G (Q-DD running in 200G mode) to split 2x 100G (QSFP28).  200G Q-DD end only works in QSFP-DD/Q-DD ports.  QSFP28 end can work in QSFP28, QSFP56, QSFP-DD/Q-DD ports.
Aruba 200G Q-DD to 2xQSFP28 100G 7m AOC (R9B58A)	7m	
Aruba 200G Q-DD to 2xQSFP28 100G 15m AOC (R9B62A)	15m	
Aruba 200G Q-DD to 2xQSFP28 100G 30m AOC (R9B61A)	30m	
Aruba 200G Q-DD to 2xQSFP28 100G 50m AOC (R9B59A)	50m	

### Compatibility for the QSFP28 ends of the above QSFP-DD transceiver modules


QSFP56 or QSFP28 capable product name (SKU)	Minimum software required	Comments
Aruba 6300 Switch Series	Not supported	
Aruba 6400 Switch Series	Not supported	
Aruba 8100 Switch Series	10.12.0000	Only the QSFP28 end is supported
Aruba 8325 Switch Series (QSFP28 ports only)	10.10.1000	Only the QSFP28 end is supported.
Aruba 8360 Switch Series (QSFP28 ports only)	10.10.1000	Only the QSFP28 end is supported.
Aruba 8400 Switch Series	Not supported	
Aruba 9300 Switch Series -32D models	10.10.1000	Either end can be used in the 9300 32D (Q-DD ports support QSFP28 and Q-DD). QSFP-DD (Q-DD) ends of these AOCs can not be used in 100G QSFP28 or in 40G QSFP+ ports.
Aruba 9300S Switch Series -32C 8D models	10.13.1000	QDD or QSFP56 ends can be used in the 9300S Q-DD ports (17-24). QSFP56 ends can be used in the 9300S QSFP56 ports (9-16 or 25-32) configured for <b>speed-group 1</b> in groups of 4. QSFP28 ends can be used in any 9300S QSFP28, QSFP56, or QDD port 1-40 configured for <b>speed-group 1</b> in groups of 4 (except the center QDD ports 17-24 which do not

QSFP56 or QSFP28 capable product name (SKU)	Minimum software required	Comments
		require configuration). QSFP-DD (Q-DD) products cannot be used in 100G QSFP28 or in 40G QSFP+ ports.
Aruba 10000 Switch Series	10.12.000x	QSFP28 ends will list as "unsupported" until a future CX release.

### 100G QSFP28 optical transceiver modules that use MPO connectors

QSFP28 modules are designed to operate with 4 channels of 25G (the "Q" stands for Quad) resulting in a combined bandwidth of 100G links. QSFP28 ports are also compatible to support QSFP+ which are 4 channels of 10G bandwidth resulting in 40G links. QSFP28 transceivers, DACs, and AOCs can be broken into 4 separate links of 25G but are determined by the switch hardware behind the QSFP28 port (See [Splitting of QSFP+ and QSFP28 ports](#) for more information). QSFP28 ports support products that are typically NRZ (Non-Return to Zero) technology, resulting in up to 4x 25G streams of data. See [Overview](#) for information regarding MPO connectors and cable requirements.

#### **QSFP28 optical transceiver module that use MPO connectors**

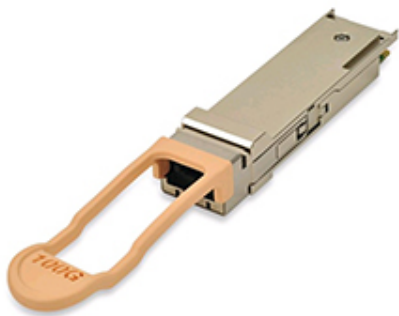

### Models, specifications, and compatibility

QSFP28 optical transceiver modules provide a transmission rate of 100 Gbps.

#### **Specifications for QSFP28 optical transceiver modules that use MPO connectors**

Product name (SKU)	DOM - Digital Optical Monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode & connector type	Fiber diameter (µm)	Modal bandwidth (MHz*km)	Transmission distance
Aruba 100G QSFP28 MPO SR4 100m 12-fiber MPO MMF Transceiver (JL309A)	Yes 1990-4680 1990-4678	4 lanes 850 4x 25G NRZ	MMF (MPO12 - 8 fibers used) (PC)	50/125	2000 (OM3) 4700 (OM4)	70m (229.66 ft) 100m (328.08 ft)

Product name (SKU)	DOM - Digital Optical Monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode & connector type	Fiber diameter (µm)	Modal bandwidth (MHz*km)	Transmission distance
HPE ANW 100G SR2 QSFP28 100m MMF xcvr (S1C93A)	Yes 1990-4871 1990-4890	2 lanes 850 2x 50G PAM4	MMF (MPO12 – only 4 fibers used) (PC)	50u	OM3 OM4 OM5	70m (229.66 ft) 100m (328.08 ft) 100m (328.08 ft)



SR4 is not supported for use over MMF OM1 or OM2 fiber. (The IEEE standard does not state a specification.) Use MPO Female connectors (no pins) with MPO transceivers. See [Connector types](#) for more information about MPO connectors.

Refer to [400G Q-DD optical interoperability with slower speed optics](#) in the QSFP-DD chapter for connecting 100G SR4 or SR2 optics to split 400G SR8 optics. 100G SR4 optics can be used by a QSFP28 port that can be "split" into four channels of 25G (available on select switch models/modules on identified ports). See [Splitting of QSFP+ and QSFP28 ports](#) for more information.

The following optical breakout cables can be used with 100G SR4 to split into 4x 25G SR compatible streams. These cables are ordered from the HPE Compute and Server or Storage business units and may not be available to Aruba-only resellers.

Fiber breakout cables (from HPE Server products):

- (Storage SKU) K2Q46A, HPE MPO to 4 x LC 5m Cable
- (Storage SKU) K2Q47A, HPE MPO to 4 x LC 15m Cable

These are PC (physical connect) style MPO connectors. DO NOT use for optics that require APC (angled physical connect) MPO connectors.



Refer to [Breakout optical cables](#) for APC vs PC vs UPC.

#### **Optical specifications for QSFP28 optical transceiver modules that use MPO connectors**

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
Aruba 100G QSFP28 MPO SR4 100m 12-fiber MPO MMF Transceiver (JL309A)	MPO (PC polished, 12-fiber) do NOT use APC	-8.4 to +2.4	-10.3 to +2.4
HPE ANW 100G SR2 QSFP28 100m MMF xcvr (S1C93A)	MPO (PC polished, 12-Fiber – only 4 used) do NOT use APC	-6.5 to +4.0	-8.4 to +4.0

**Compatibility for the QSFP28 optical transceiver modules that use MPO connectors**

(see [Unsupported transceiver mode](#))

QSFP28 capable product name (SKU)	Minimum software required	Comments
Aruba 6300 48p Smart Rate 10G PoE with 4x100G QSFP (S0E91A/S0X44A)	JL309A: 10.13.000x S1C93A: 10.14.000x	These 6300 models are not capable of Splitting the QSFP ports. S0E91A/S0X44A models require interface group 2 or 3 to configure either 40G or 100G speed operation.
Aruba 6400 12p 40G/100G QSFP28 Module (R0X45A)  12p 40G/100G QSFP28 Module v2 (R0X45C)  HPE ANW 6400 32SFP28 4QSFP28 MACsec v2 Module (S0E48A)	JL309A: 10.04.2000 S1C93A: not supported  JL309A: 10.09.1000 S1C93A: 10.14.000x  JL309A: 10.13.1010 S1C93A: 10.14.000x	Aruba 6400 modules with QSFP28 ports do not have Split Mode enabled in AOS-CX as of the 10.13.1000 release.
<b>Aruba 8100 Switch Series</b>	JL309A: 10.12.1000 S1C93A: 10.14.000x	8100 48port models CANNOT split the QSFP28 port. For the 24p models 100G SR4 can be optically split as of: 10.12.1000
<b>Aruba 8325 32C models</b> JL636A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	JL309A: 10.03.0030  S1C93A: 10.13.100x	100G SR4 can be optically split as of: 10.05.0001
<b>Aruba 8325 48Y8C models</b> JL635A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	JL309A: 10.03.0030  S1C93A: 10.13.100x	100G SR4 can be optically split as of: 10.05.0001
<b>Aruba 8360 32Y4C models**</b> JL717A/JL717C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) - Port-to-Power model (FB)</li> <li>▪ JL701A/JL701C(v2) - Power-to-Port model (BF)</li> </ul>	JL309A: v1 models: 10.05.0001 v2 models: 10.09.1000  S1C93A: 10.13.100x	100G SR4 can be optically split as of: 10.06.0001
<b>Aruba 8360 16Y2C models</b> JL718A/JL718C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) - Port-to-Power model (FB)</li> <li>▪ JL703A/JL703C(v2) - Power-to-Port model (BF)</li> </ul>	JL309A: v1 models: 10.05.0001 v2 models: 10.09.1000  S1C93A: 10.13.100x	100G SR4 can be optically split as of: 10.06.0001
<b>Aruba 8360 48Y6C models**</b>	48Y6C initially released as v2	100G SR4 can be optically

QSFP28 capable product name (SKU)	Minimum software required	Comments
JL719C displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL704C(v2) - Port-to-Power model (FB)</li> <li>JL705C(v2) - Power-to-Port model (BF)</li> </ul>	models: JL309A: 10.09.0002  S1C93A: 10.13.100x	split as of: 10.09.0002 MACsec available on ports 53-54 and via split 10G or 25G on those ports (MACsec not available on ports 49-52)
<b>Aruba 8360 48XT4C models</b> JL720A/JL720C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL706A/JL706C(v2) - Port-to-Power model (FB)</li> <li>JL707A/JL707C(v2) - Power-to-Port model (BF)</li> </ul>	JL309A: v1 models: 10.05.0001 v2 models: 10.09.1000  S1C93A: 10.13.100x	Cannot split the SR4 optics into four channels (lack of enough MAC interfaces)
<b>Aruba 8360 12C models</b> JL721A/JL721C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL708A/JL708C(v2) - Port-to-Power model (FB)</li> <li>JL709A/JL709C(v2) - Power-to-Port model (BF)</li> </ul>	JL309A: v1 models: 10.05.0001 v2 models: 10.09.1000  S1C93A: 10.13.100x	100G SR4 can be optically split as of: 10.06.0001
<b>Aruba 8360 24XF2C models</b> JL722A/JL722C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL710A/JL710C(v2) - Port-to-Power model (FB)</li> <li>JL711A/JL711C(v2) - Power-to-Port model (BF)</li> </ul>	JL309A: v1 models: 10.05.0001 v2 models: 10.09.1000  S1C93A: 10.13.100x	100G SR4 can be optically split as of: 10.06.0001
<b>Aruba 8400X Module</b> 6p 40G/100G QSFP28 Advanced Module (JL366A)	JL309A: 10.00.0005  S1C93A: Not supported	10.00.0005 provided 100G product support. 10.00.0006 provides additional support for 40G on the JL366A. 8400 JL366A QSFP28 module cannot split 100G SR4 into 25G streams (no 25G MAC interfaces).
<b>Aruba 9300 Switch Series</b> -32D models R8Z96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>R9A29A FB airflow</li> <li>R9A30A BF airflow</li> </ul>	JL309A: 10.00.0005  S1C93A: Not supported	100G SR4 can be optically split
<b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>S0F81A FB TAA</li> </ul>	JL309A, S1C93A: 10.14.0001	9300S requires configuration of port-groups to enable 100G speeds. 10G is enabled using <b>speed-group 1</b> for the selected port (organized in groups of 4). The center QDD ports (17-24) do not need a

QSFP28 capable product name (SKU)	Minimum software required	Comments
<ul style="list-style-type: none"> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>		command, and are auto-sensing.
<b>Aruba 10000 48Y6C models</b> R8S96A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JL309A: 10.10.0002  S1C93A: Not supported	100G SR4 can be optically split



\*\*The 48 and 32 x 25G port models of the 8360 switch also support low-density MACsec ports and enable secured connectivity at 10GbE and 25GbE over unsecured domains. The 48 x 25G port model of the 8360 switch also supports MACsec with 2 x 40G/100G ports.

## 100G QSFP28 optical transceiver modules that use LC connectors



### Models, specifications, and compatibility

QSFP28 optical transceiver modules provide a transmission rate of 100 Gbps and use LC connectors.

The 845972-B21 100G BiD transceiver is a Short Reach 100G product, designed to work over Multi-mode Fiber (MMF) only of OM3 or better quality. It is NOT supported for use over OM1/OM2 quality fiber.

The 845972-B21 100G BiDi transceiver is offered by HPE Server. These parts are ordered using the specified part number (transceiver may not be available to order for Aruba-only partners).

Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com to verify compatibility with HPE network adapters.

#### Specifications for QSFP28 optical transceiver modules that use LC connectors

\*HPE Server or HPE Storage product. May not be available to Aruba resellers.

Product name (SKU)	DOM - Digital Optical Monitoring (4x4 part #)	Nominal wl (nm)	Fiber mode	Fiber diameter (µm)	Transmission distance
*HPE 100Gb QSFP28 BiDirectional xcvr (845972-B21) an HPE Server SKU#	YES (part # n/a)	2 lanes on each fiber: 855 and 908 2x PAM4 50G	MMF	50u OM3 50u OM4 50u OM5	70 m (229.6 ft) 100 m (328.1 ft) 150 m (492.1 ft)



Product name (SKU)	DOM - Digital Optical Monitoring (4x4 part #)	Nominal wl (nm)	Fiber mode	Fiber diameter (µm)	Transmission distance
HPE Aruba Networking 100G DR QSFP28 LC 500m SMF Transceiver (S3N88A)	Yes	Single lane, 1310 1x100G PAM4  Connects to 1 link from the 400G 4xDR (S3N90A)	SMF (UPC)	9/125	500 m (1640.42 ft)
Aruba 100G QSFP28 LC CWDM4 2km SMF Transceiver (R0Z30A)	YES (1990-4644, 1990-4643)	Four lanes: 1264.5 to 1277.5 1284.5 to 1297.5 1304.5 to 1317.5 1324.5 to 1337.5	SMF	9/125	2 km (1.24 miles)
Aruba 100G QSFP28 LC FR1 2km SMF Transceiver (R9B63A)	1990-4825 1990-4826	Single lane on each fiber 1310 1x PAM4 100G  Connects to 1 link from the 400G 4xFR (S3N91A)	SMF	9/125	2 km (1.24 miles)
Aruba 100G QSFP28 LC LR4 10km SMF 2-strand Transceiver (JL310A)	YES (1990-4681)	Four lanes: 1294.53 to 1296.59 1299.02 to 1301.09 1303.54 to 1305.63 1308.09 to 1310.19	SMF	9/125	10 km (6.21 miles)
HPE Aruba Networking 100G LR QSFP28 LC 10km SMF Transceiver (S3N89A)	Yes 1990-4929	Single lane, 1310 1x100G PAM4  Connects to 1 link from the 400G 4xLR (S3N92A)	SMF LC (UPC)	9/125	10 km (6.21 miles)
Aruba 100G QSFP28 LC ER4L 40km SMF Transceiver (JL743A)	YES (1254-5112)	Four lanes: 1294.53 to 1296.59 1299.02 to 1301.09 1303.54 to 1305.63 1308.09 to 1310.19	SMF	9/125	40 km (24.86 miles) Requires FEC

**Optical specifications for QSFP28 optical transceiver modules that use LC connectors**

\*HPE Server or Storage product. May not be available to Aruba resellers.

(see [Unsupported transceiver mode](#))

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
*HPE 100Gb QSFP28 BiDirectional xcvr (845972-B21)	LC	-6.0 to 4.0 per lane	-7.9 to +4.0 per lane

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
HPE Aruba Networking 100G DR QSFP28 LC 500m SMF Transceiver (S3N88A)	LC	-2.9 to +4.0 per lane	-5.9 to +4.0 per lane
Aruba 100G QSFP28 LC CWDM4 2km SMF Transceiver (R0Z30A)	LC	-6.5 to 2.5 per lane	-11.5 to +2.5 per lane
Aruba 100 QSFP28 LC FR1 2km SMF Transceiver (R9B63A)	LC	-3.1 to 4.0 per lane	-7.1 to +4.0 per lane
Aruba 100G QSFP28 LC LR4 10km SMF 2-strand Transceiver (JL310A)	LC	-4.3 to +4.5 per lane	-10.6 to +4.5 per lane
HPE Aruba Networking 100G LR QSFP28 LC 10km SMF Transceiver (S3N89A)	LC	-1.9 to +4.8 per lane	-8.2 to +4.8 per lane
Aruba 100G QSFP28 LC ER4L 40km SMF Transceiver (JL743A)	LC	-2.5 to 6.5 per lane	-20.5 to -3.5 per lane (use 10dB attenuator for short SMF cables)

**Compatibility for the QSFP28 optical transceiver modules that use LC connectors**

\*HPE Server or Storage product. May not be available to Aruba resellers.

QSFP28 capable Product name (SKU)	Minimum software required	Comments
Aruba 6300 48p Smart Rate 10G PoE with 4x100G QSFP (S0E91A/S0X44A)	*845972-B21 (100G BiDi), R0Z30A (CWDM4 2km), JL310A (LR4 10km), JL743A (ER4L 40km), R9B63A FR1 2km: 10.13.000x  S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	S0E91A/S0X44A models require "interface group" 2 or 3 to configure either 40G or 100G speed operation.
<b>Aruba 6400 Modules</b>		
12p 40G/100G QSFP28 Module (R0X45A)	*845972-B21 (100G BiDi): 10.08.0010 R0Z30A (CWDM4 2km): 10.07.0005 JL310A (LR4 10km): 10.04.2000 JL743A (ER4L 40km): Not supported R9B63A FR1 2km: 10.13.1000 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	
12p 40G/100G QSFP28 Module (R0X45C)	*845972-B21 (100G BiDi), R0Z30A (CWDM4 2km), JL310A (LR4 10km): 10.09.1000 JL743A (ER4L 40km): Not supported R9B63A FR1 2km: 10.13.00xx S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	The minimum software release for the R0X45C module is 10.09.1000.
HPE ANW 6400 32SFP28 4QSFP28 MACsec v2 Mod (S0E48A)	*845972-B21 (100G BiDi), R0Z30A (CWDM4 2km), JL310A (LR4 10km): 10.13.1010 JL743A (ER4L 40km): Not supported R9B63A FR1 2km: 10.13.1010 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	The minimum software release for the S0E48A module is 10.13.1010

QSFP28 capable Product name (SKU)	Minimum software required	Comments
<b>Aruba 8100 Switch Series</b>	*845972-B21 (100G BiDi): 10.12.0006 R0Z30A (CWDM4 2km): 10.12.0006 JL310A (LR4 10km): 10.12.0006 JL743A (ER4L 40km): Not supported R9B63A (FR1 2km): 10.12.0006 R9B63A: only allowed in lower 2 ports on BF airflow bundles (FB models can have full complement) S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	Use of R9B63A FR1 derates switch to max ambient temp of 35C for both airflow configurations
<b>Aruba 8325 32C models</b> (JL626A/JL627A)	*845972-B21 (100G BiDi): 10.08.0010 R0Z30A (CWDM4 2km): 10.03.0030 JL310A (LR4 10km): 10.03.0030 JL743A (ER4L 40km): 10.04.3000; ports 29-32 only R9B63A FR1 2km: 10.10.1000 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	JL743A (100G ER4L) is limited to quantity 4 and only allowed in ports 29-32 (last 4 ports) to limit possible heat issues.
<b>Aruba 8325 48Y8C models</b> (JL624A/JL625A)	*845972-B21 (100G BiDi): 10.08.0010 R0Z30A (CWDM4 2km): 10.03.0030 JL310A (LR4 10km): 10.03.0030 JL743A (ER4L 40km): 10.04.3000; ports 49, 51, 53 and 55 only R9B63A FR1 2km: 10.10.1000 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	JL743A (100G ER4L) is limited to quantity 4 and only allowed in ports 49, 51, 53, and 55 (top row) to limit possible heat issues.
<b>Aruba 8360 v1 and v2 models</b> (48Y6C noted below)	*845972-B21 (100G BiDi): 10.08.0010 R0Z30A (CWDM4 2km): 10.07.0005 JL310A (LR4 10km): 10.06.0001 JL743A (ER4L 40km): 10.06.0140 and 10.07.0004 v2 models: 10.09.1000 (except 48Y6C noted below) R9B63A FR1 2km: 10.10.1000 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	QSFP28 ports on the various models
<b>Aruba 8360 48Y6C models</b> JL719C displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL704C(v2) - Port-to-Power model (FB)</li> <li>▪ JL705C(v2) - Power-to-Port model (BF)</li> </ul>	*845972-B21(100G BiDi): 10.09.0002 R0Z30A (CWDM4 2km): 10.09.0002 JL310A (LR4 10km): 10.09.0002 JL743A (ER4L 40km): 10.09.0002 R9B63A FR1 2km: 10.10.1000 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	Ports 49-54  Note: MACsec available on ports 53-54
<b>Aruba 8400X Module:</b> 6p 40G/100G QSFP28 Advanced Module (JL366A)	*845972-B21 (100G BiDi): 10.08.0010 R0Z30A (CWDM4 2km): 10.06.0001 JL310A (LR4 10km): 10.00.0005 JL743A (ER4L 40km): 10.04.3000 R9B63A FR1 2km: Not supported S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	10.00.0005 provides support for 100G products. 10.00.0006 provides additional support for 40G on the JL366A.
<b>Aruba 9300 Switch Series</b> -32D models R8Z96A-Base displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R9A29A FB airflow</li> <li>▪ R9A30A BF airflow</li> </ul>	*845972-B21(100G BiDi): 10.14.0001 R0Z30A (CWDM4 2km):10.10.1000 JL310A (LR4 10km):10.10.1000 JL743A (ER4L 40km):10.10.1000 R9B63A FR1: 10.10.1000 S3N88A (500m DR), S3N89A (10km LR): 10.13.1010	

QSFP28 capable Product name (SKU)	Minimum software required	Comments
<p><b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base</p> <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>	<p>*845972-B21(100G BiDi), R0Z30A(CWDM4 2km), JL310A(LR4 10km), JL743A (ER4L 40km), R9B63A FR1 2km, S3N88A, S3N89A: 10.14.0001</p>	<p>9300S requires configuration of port-groups to enable 100G speeds. Groups of 4 - all ports in the group need to be of the same speed set (100G vs 40G). 100G is enabled using speed-group 1 (default) for the selected port group. The center QDD ports (17-24) do not need a command, and are auto-sensing.</p>
<p><b>Aruba 10000 48Y6C models</b> R8S96A displayed by CLI <b>show system</b></p> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	<p>*845972-B21(100G BiDi):10.10.0002 R0Z30A(CWDM4 2km): 10.10.0002 JL310A(LR4 10km): 10.10.0002 JL743A (ER4L 40km): 10.13.000x R9B63A FR1 2km: 10.10.1000 S3N88A (500m DR), S3N89A (10km LR): not supported</p>	<p>See <a href="#">Unsupported transceiver mode</a>.</p>

## 100G QSFP28 DAC and breakout DAC (copper cables)



### Models, specifications, and compatibility

#### Specifications for QSFP28 copper cables

Product name (SKU)	Cable length	Data rate	Description
Aruba 100G QSFP28 to QSFP28 1m Direct Attach Copper Cable (R0Z25A)	1 m (3.28 ft)	100 Gbps	Used for interconnecting 100-Gigabit QSFP28 ports
Aruba 100G QSFP28 to QSFP28 3m Direct Attach Copper Cable (JL307A)	3 m (9.8 ft)	100 Gbps	Used for interconnecting 100-Gigabit QSFP28 ports
Aruba 100G QSFP28 to QSFP28 5m Direct Attach Copper Cable (R0Z26A)	5 m (16.4 ft)	100 Gbps	Used for interconnecting 100-Gigabit QSFP28 ports
HPE Aruba Networking 50G QSFP56 to SFP56 0.65m DAC Cable (S1J07A)	0.65 m (2.13ft)	50 Gbps	Primarily used by 6300 48p SR10 4x100G models to connect to existing 6300M or F models for stacking
HPE Aruba Networking 50G QSFP56 to SFP56 3m DAC Cable (S1J08A)	3 m (9.8 ft)		Not supported for use on any other switch at this time.

The following breakout DAC cable is offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.

AOS-CX releases 10.05 and later support a **split** command configured on 100G QSFP28 ports. Not all QSFP28 ports can be split. See [Splitting of QSFP+ and QSFP28 ports](#) for more information.



10.05 and 10.06 require the configuration to be saved and the switch to be rebooted to enable the split operation on the ports. Starting with the 10.07 release, the need to save and reboot is now removed for the 8320, 8325, and 8360 series. The 8400 still requires a save and reboot.

#### Specifications for HPE QSFP28 breakout DAC cables (from HPE Server products)

Product name (SKU)	Cable length	Data rate
*HPE 100Gb QSFP28 to 4x25Gb SFP28 3m DAC (845416-B21)	3 m (9.84 ft)	100G to 4 x 25G

## Compatibility for the QSFP28 DAC and breakout DAC copper cables

(see [Unsupported transceiver mode](#))

\* HPE Server or Storage product. May not be available to Aruba resellers.

QSFP28 DAC capable Product name (SKU)	Minimum software required	Comments
Aruba 6300M 48G 4SFP56 Swch (JL663A) Aruba 6300M 48G Pwr2Prt 2F 1PS Bdl (JL762A)	*845416-B21: 10.06.0120/10.07.0020 JL663A and JL762A: 10.06.0120/10.07.0020 (SFP28 ends)	The SFP28 ends of 845416-B21 are supported for use in the SFP56 ports of the models specified here (NOT on the other models).
6300M 24G SFP+ 2p50 2p25G (R8S92A)	*845416-B21: 10.10.1000 only in ports 25-28 (only SFP28 ends)	S0E91A/S0X44A models interface group 2 or 3 to configure either 40G or 100G speed operation, this cable works in either mode.
Aruba 6300 48p Smart Rate 10G and 4x100G (S0E91A/S0X44A)	R0Z25A,JL307A, R0Z26A: 10.13.000x S1J07A,S1J08A: 10.13.1020	S1J07A,S1J08A: the SFP56 ends are for connecting to other 6300M or F models (for VSF stacking)
<b>Aruba 6400 Switch Series</b> 12p 40G/100G QSFP28 Module (R0X45A)	JL307A: 10.04.2000 R0Z25A/R0Z26A: 10.08.0001 *845416-B21: Not supported	*845416-B21: 6400 does not yet have split port capability.
12p 40G/100G QSFP28 Module (R0X45C)	JL307A, R0Z25A/R0Z26A: 10.09.1000 *845416-B21: Not supported	
HPE ANW 6400 32SFP28 4QSFP28 MACsec v2 Mod (S0E48A)	JL307A, R0Z25A/R0Z26A: 10.13.1010 *845416-B21: Not supported	
<b>Aruba 8100 Switch Series</b>	R0Z25A,JL307A,R0Z26A:10.12.1000 *845416-B21: 10.12.1000 (requires <b>split</b> command)	48 port models cannot split the QSFP ports
<b>Aruba 8325 32C models</b> JL636A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	JL307A: 10.03.0030 R0Z25A/R0Z26A: 10.04.2000 *845416-B21: 10.05.0001 (requires <b>split</b> command)	All 32 QSFP28 ports can be split 10.05.0001: only the QSFP28 end is supported in the switch. SFP28 end is not supported at this time
<b>Aruba 8325 48Y8C models</b> JL635A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	JL307A: 10.03.0030 R0Z25A/R0Z26A: 10.04.2000 *845416-B21: 10.05.0001 (requires <b>split</b> command)	All 8 QSFP28 ports can be split 10.05.0001: only QSFP28 end is supported in the switch. SFP28 end is not supported at this time
<b>Aruba 8360 32Y4C models</b> JL717A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-</li> </ul>	JL307A, R0Z25A/R0Z26A: 10.06.0001 *845416-B21: 10.06.0001 (Requires <b>split</b> command) v2 models require: 10.09.1000	33-36 (all QSFP28 ports can be split) *845416-B21: 10.06.0001 Only the QSFP28 end is

QSFP28 DAC capable Product name (SKU)	Minimum software required	Comments
Power model <ul style="list-style-type: none"> <li>▪ JL701A/ JL701C(v2) Power-to-Port model</li> </ul>		supported in the switch. SFP28 end is not supported at this time.  *845416-B21: 10.13.1010 added support of 25G ends
8360 16Y2C models JL718A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul>	JL307A, R0Z25A/R0Z26A: 10.06.0001 *845416-B21: 10.06.0001 (requires <b>split</b> command) v2 models require: 10.09.1000	17-18 (all QSFP28 ports can be split) *845416-B21: 10.06.0001 Only the QSFP28 end is supported in the switch. SFP28 end is not supported at this time.  *845416-B21: 10.13.1010 added support of 25G ends
Aruba 8360 48Y6C models JL719C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL704C(v2) - Port-to-Power model (FB)</li> <li>▪ JL705C(v2) - Power-to-Port model (BF)</li> </ul>	(introduced as a v2 model) JL307A, R0Z25A/R0Z26A: 10.09.0002 *845416-B21: 10.09.0002 (requires <b>split</b> command)	Ports 49-54  *845416-B21: 10.06.0001 Only the QSFP28 end is supported in the switch. SFP28 end is not supported at this time.  *845416-B21: 10.13.1010 added support of 25G ends  Note: MACsec available on ports 53-54
8360 48XT4C models JL720A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL706A/JL706C(v2) Port-to-Power model</li> <li>▪ JL707A/JL707C(v2) Power-to-Port model</li> </ul>	JL307A, R0Z25A/R0Z26A: 10.06.0001 *845416-B21: Not supported v2 models require: 10.09.1000	Hardware does not support splitting of any of the QSFP28 ports. There are not enough MACs to support split QSFP28 ports.
Aruba 8360-12C models JL721A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL708A/JL708C(v2) Port-to-Power model</li> <li>▪ JL709A/JL709C(v2) Power-to-Port model</li> </ul>	JL307A, R0Z25A/R0Z26A: 10.06.0001 *845416-B21: 10.06.0001 (requires <b>split</b> command) v2 models require: 10.09.1000	1-12 (all QSFP28 ports can be split) There are no SFP28 ports on this model
8360 24XF2C models JL722A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port</li> </ul>	JL307A, R0Z25A/R0Z26A: 10.06.0001 *845416-B21: 10.06.0001 (requires <b>split</b> command) v2 models require: 10.09.1000	25-26 (all QSFP28 ports can be split) There are no SFP28 ports on this model (24 ports of 1G/10G SFP and 2 ports of QSFP28)

QSFP28 DAC capable Product name (SKU)	Minimum software required	Comments
model		
Aruba 8400X Module: 6p 40G/100G QSFP28 Advanced Module (JL366A)	JL307A: 10.00.0005 R0Z25A/R0Z26A: 10.06.0001 *845416-B21: Not supported nor any type of 100G split cable	*845416-B21: 8400 JL366A 6p QSFP28 module cannot support splitting 100G ports into 4x25G speed (no 25G MAC available on the JL366A module)
<b>Aruba 9300 Switch Series</b> -32D models R8Z96A-Base displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R9A29A FB airflow</li> <li>▪ R9A30A BF airflow</li> </ul>	JL307A, R0Z25A/R0Z26A: Not supported *845416-B21: Not supported	May work in UT-mode See <a href="#">Unsupported transceiver mode</a>
<b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F85A FB DC TAA</li> <li>▪ S0F86A FB DC</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF</li> </ul>	JL307A, R0Z25A/R0Z26A, *845416-B21: 10.14.0001	The two split cables (from HPE Server: *845420-B21, *845424-B21) can only be used in ports 9-13; 15-17; 19; 21; 23; 25-27; 29-32.  The 9300S requires configuration of port-groups to enable 100G speeds. Groups of 4 - all ports in the group need to be of the same speed set (100G vs 40G). 100G is enabled using speed-group 1 (default) for the selected port group.  The center QDD ports (17-24) do not need a command, and are auto-sensing.
Aruba 10000 48Y6C models R8S96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JL307A, R0Z25A/R0Z26A: 10.10.0002 *845416-B21: 10.12.1000	



\* HPE Server or Storage product. May not be available to Aruba resellers.



## 100G QSFP28 AOC and breakout AOC (active optical cables)



### Models, specifications, and compatibility

#### Specifications for QSFP28 100G active optical cables

Product name (SKU)	Cable length	Data rate
Aruba 100G QSFP28 to QSFP28 2m AOC (JL856A)	2 m (6.6 ft)	100 Gbps
Aruba 100G QSFP28 to QSFP28 7m AOC (R0Z27A)	7 m (22.96 ft)	100 Gbps
Aruba 100G QSFP28 to QSFP28 15m AOC (R0Z28A)	15 m (49.21ft)	100 Gbps
Aruba 100G QSFP28 to QSFP28 30m AOC (R0Z29A)	30 m (98.42 ft)	100 Gbps

The following 100G breakout AOC cables are offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.



For the AOS-CX 10.05 and later releases, the configuration requires a save and reboot of the switch or module. See the *Monitoring Guide* for details on the `split` command.

#### Specifications for HPE QSFP28 breakout 100G active optical cables (from HPE Server products)

Product name (SKU)	Cable length	Data rate
*HPE QSFP28 to 4x25G SFP28 7m AOC (845420-B21)	7 m (22.96 ft)	4 x 25Gbps
*HPE QSFP28 to 4x25G SFP28 15m AOC (845424-B21)	15 m (49.21ft)	4 x 25Gbps

## Compatibility for the QSFP28 100G active optical cables

(see [Unsupported transceiver mode](#))

\* HPE Server or Storage product. May not be available to Aruba resellers.


QSFP28 AOC capable product name (SKU)	Minimum software required (JL856A, R0Z27A, R0Z28A, R0Z29A, *845420-B21, *845424-B21)	Comments
<p><b>Aruba 6300 (select models)</b></p> <ul style="list-style-type: none"> <li>▪ JL658A - Aruba 6300M 24SFP+ 4SFP56 Swch</li> <li>▪ JL663A - Aruba 6300M 48G 4SFP56 Swch</li> <li>▪ JL762A - Aruba 6300M 48G Pwr2Prt 2F 1PS Bd</li>   <li>▪ R8S92A - Aruba 6300M 24G SFP+ 2p50 2p25G</li>   <li>▪ S0E91A HPE ANW 6300M 48SRX CL8 PoE 4p100G Sw</li> <li>▪ S0X44A HPE ANW 6300M 48SRX CL8 PoE 4p100G TAA Sw</li> </ul>	<p>JL856A, R0Z27A, R0Z28A, R0Z29A: Not supported (no 100G ports) *845420-B21, *845424-B21: 10.08.0001</p> <p>JL856A, R0Z27A, R0Z28A, R0Z29A: Not supported (no 100G ports) *845420-B21, *845424-B21: 10.10.1000 Only in ports 25-28</p> <p>JL856A, R0Z27A, R0Z28A, R0Z29A: 10.13.000x</p> <p>*845420-B21, *845424-B21: Not supported</p>	<p>Support for the 25G ends of the split AOC from HPE Compute parts</p> <p>Support for the 25G ends of the split AOC from HPE Compute parts</p> <p>S0E91A / S0X44A models require interface group 2 or 3 to configure either 40G or 100G speed operation.</p> <p>S0E91A and S0X44A models cannot split the QSFP28 port, nor connect via a QSA28 adapter for the 25G ends.</p>
<p><b>Aruba 6400 (select modules)</b></p> <ul style="list-style-type: none"> <li>▪ Aruba 6400 Module: 12p 40G/100G QSFP28 Module (R0X45A/R0X45C)</li>   <li>▪ HPE ANW 6400 32Y4C MACsec v2 Module (S0E48A)</li> </ul>	<p>Not supported</p> <p>R0Z27A,R0Z28A,R0Z29A: 10.13.1010 JL856A, *845420-B21, *845424-B21: Not supported on S0E48A</p>	<p>No split port support on S0E48A</p>
<p><b>Aruba 8100 Switch Series</b></p>	<p>R0Z27A,R0Z28A,R0Z29A, *845420-B21, *845424-B21: 10.13.100x</p>	
<p><b>Aruba 8325 48Y8C models</b> JL635A displayed by CLI <b>show system</b></p> <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	<p>JL856A: 10.08.0001 R0Z27A, R0Z28A, R0Z29A: 10.06.0001 *845420-B21, 845424-B21: 10.06.0001 (Requires <b>split</b> command)</p>	<p>845420-B21, 845424-B21: either QSFP28 or SFP28 ends are supported for use The 8325 requires configuration of <b>interface groups</b> (groups of 12 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.</p>

QSFP28 AOC capable product name (SKU)	Minimum software required (JL856A, R0Z27A, R0Z28A, R0Z29A, *845420-B21, *845424-B21)	Comments
Aruba 8325 32C models JL636A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	JL856A: 10.08.0001 R0Z27A, R0Z28A, R0Z29A: 10.06.0001 *845420-B21, 845424-B21: 10.06.0001 (Requires <b>split</b> command)	845420-B21, 845424-B21: only QSFP28 supported for use in this 8325 model
<b>Aruba 8360 Switch Series</b>	JL856A: 10.08.0001 R0Z27A, R0Z28A, R0Z29A: 10.07.0005 *845420-B21, 845424-B21: 10.07.0005 (Requires <b>split</b> command)	*845420-B21, *845424-B21: QSFP28 end of split cables not supported on 8360 48XT4C models (v1 or v2) no support for splitting ports; not enough MACs available.  Both ends of the split DACs are supported/recognized for use on other models, in appropriate ports
Aruba 8360 48Y6C models	JL856A,R0Z27A, R0Z28A, R0Z29A: 10.09.0002 *845420-B21, 845424-B21:10.09.0002	*845420-B21, *845424-B21: both ends are recognized in this 8360 model.
Aruba 8400X Module: 6p 40G/100G QSFP28 Advanced Module (JL366A)  32p 1/10/25G SFP/SFP+/SFP28 Module (JL687A)	JL856A: Not supported R0Z27A, R0Z28A, R0Z29A: 10.06.0001  JL366A module: *845420-B21, 845424-B21: QSFP28 end not supported  JL687A module: Only the 25G ends of these 4x25G AOC are supported with 10.16.0001	JL687A module: *845420-B21, *845424-B21  Only the SFP28 ends are supported for use with 10.06.0001
<b>Aruba 9300 Switch Series</b> -32D models R8Z96A-Base displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R9A29A FB airflow</li> <li>▪ R9A30A BF airflow</li> </ul>	JL856A, R0Z27A, R0Z28A, R0Z29A: 10.11.1000 *845420-B21, 845424-B21: not supported	
<b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: DF95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ 0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F85A FB DC TAA</li> <li>▪ S0F86A FB DC</li> </ul>	JL856A, R0Z27A, R0Z28A, R0Z29A, *845420-B21, *845424-B21: 10.14.0001	The two split cables (from HPE Server: *845420-B21, *845424-B21) can only be used in ports 9-13; 15-17; 19; 21; 23; 25-27; 29-32.  9300S requires configuration of port-groups to enable 100G speeds. Groups of 4 - all ports in the group need to be of the same speed set (100G vs 40G). 100G is enabled using speed-group 1 (default) for the selected

QSFP28 AOC capable product name (SKU)	Minimum software required (JL856A, R0Z27A, R0Z28A, R0Z29A, *845420-B21, *845424-B21)	Comments
<ul style="list-style-type: none"> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF</li> </ul>		port group.  The center QDD ports (17-24) do not need a command, and are auto-sensing.
Aruba 10000 48Y6C models R8S96A displayed by CLI <b>(show system)</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JL856A, R0Z27A, R0Z28A, R0Z29A: 10.10.0002 *845420-B21, *845424-B21: 10.09.0010 (Requires <b>split</b> command)	

## QSFP28 to SFP28 adapter support

Figure 1 QSFP28 to SFP28 adapter

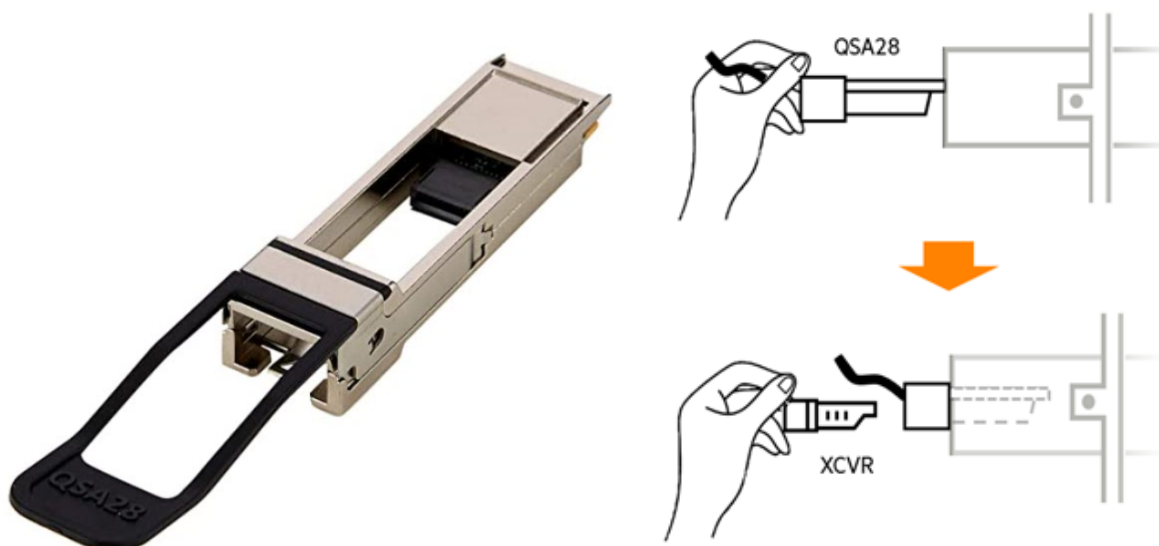

## Models, specifications, and compatibility

The following QSA28 to SFP28 adapter is offered by HPE Servers and Systems and ordered using the specified part number (this product may not be available to order by Aruba-only partners).

*HPE QSFP28 to SFP28 Adapter (845970-B21)	When used in a QSFP28 port allows for use of 25G or 10G optics When used in a QSFP+ port only use of 10G optics
---	--



The 845970-B21 is not the same as the 655874-B21 which is a 40G-only adapter (cannot work in QSFP28 ports). AOCs, DACs and 10GBASE-T transceivers are NOT supported through the QSA28 adapter; 3rd party transceivers - may work, but remain listed as unsupported.



The 845970-B21 is not supported to enable 50G SFP56 products. The part was not designed nor tested to enable 50G products.

Using the QSA28 adapter in a supported port does not require the **split** CLI command as this product presents a single interface to the port. Other non-HPE QSA28 adapters are not recognized (the internal EEPROM has this part number presented to the switch). Whether or not a particular transceiver is supported for use depends on the port type:

- QSFP-DD and QSFP28 ports (40G,100G,200-400G): 10G SR, 10G LR, 10G ER; 25G SR, 25G eSR, 25G LR (no support for 25G ER, 10GBASE-T DACs or AOCs unless specified)
- QSFP+ (40G-only) ports: 10G SR, 10G LR, 10G ER; (no support for 10GBASE-T nor DACs or AOC)

### Compatibility for the QSA28 adapter

\* HPE Server product - may not be available to Aruba resellers

QSFP28 Adapter capable product (SKU shown by <i>show system command</i> )	Minimum software required: Limited to port information	Comments
Aruba 6300M <ul style="list-style-type: none"> <li>■ 48p SRX 4x100G (S0E91A,S0X44A)</li> </ul>	10.13.000x	Use of 10G or 25G optic will automatically be detected. No configuration of the port is needed. No DAC support (10G or 25G) JL563A or B not supported. UT-mode optics may work (unsupported). The 6300 4x100G models support use of the 25G AOCs through the QSA28.
Aruba 6400 Module: <ul style="list-style-type: none"> <li>■ 12p 40G/100G QSFP28 Module (R0X45A/(R0X45C)</li> <li>■ HPE ANW 6400 32SFP28 4QSFP28 MACsec v2 Module (S0E48A)</li> </ul>	Not supported	
Aruba 8100 series <ul style="list-style-type: none"> <li>■ 24XF4C (R9W94A: R9W86A/87A)</li> <li>■ 24XT4XF4C (R9W95A: R9W88A/89A)</li> <li>■ 48XF4C (R9W96A: R9W90A/91A)</li> <li>■ 40XT8XF4C (R9W97A: R9W92A/93A)</li> </ul>	Min Software: 10.12.0001 <ul style="list-style-type: none"> <li>■ 25-28</li> <li>■ 29-32</li> <li>■ 49-52</li> <li>■ 49-52</li> </ul>	Use of 10G or 25G optic will automatically be detected. No configuration of the port is needed. No DAC nor AOC support; JL563A or B NOT supported. UT-mode optics may work (unsupported)
Aruba 8320 series <ul style="list-style-type: none"> <li>■ 48p SFP &amp; 6p QSFP+: JL479A</li> <li>■ 32p QSFP+: JL597A</li> <li>■ 48p 10GBT &amp; 6p QSFP+: JL581A</li> </ul>	Min Software: 10.07.0004 <ul style="list-style-type: none"> <li>■ 49-54</li> <li>■ 1-32</li> <li>■ 49-54</li> </ul>	Only 10G optics supported No DAC or AOC support, JL563A or B (10GBASE-T) not supported. UT-mode optics may work (unsupported)
Aruba 8325 series <ul style="list-style-type: none"> <li>■ 48Y8C models: JL635A (bundles: JL624A/JL625A)</li> <li>■ 32C models: JL636A</li> </ul>	Min Software: 10.07.0010 <ul style="list-style-type: none"> <li>■ 49-56</li> <li>■ 1-32</li> </ul>	Use of 10G or 25G optic will automatically be detected. No DAC or AOC support, JL563A or B (10GBASE-T) not supported. UT-mode optics may work

QSFP28 Adapter capable product (SKU shown by <i>show system</i> command)	Minimum software required: Limited to port information	Comments
(bundles: JL626A/JL627A)		(unsupported)
<b>Aruba 8360 Switch Series</b> (note v1 vs v2 Min Software required) <ul style="list-style-type: none"> <li>▪ 32Y4C models: JL717A/JL717C(v2)</li> <li>▪ 16Y2C models: JL718A/JL718C(v2)</li> <li>▪ 48XT4C models: JL720A/JL720C(v2)</li> <li>▪ 12C models: JL721A/JL721C(v2)</li> <li>▪ 24XF2C models: JL722A/JL722C(v2)</li> <li>▪ 48Y6C models: JL719C(v2)</li> </ul>	Min Software as noted below: v1:10.07.0004 v2:10.09.1000 <ul style="list-style-type: none"> <li>▪ 34-35</li> <li>▪ 17</li> <li>▪ 50-51</li> <li>▪ 7-12</li> <li>▪ 25</li> <li>▪ 49-50, 52-53 (10.09.0002)</li> </ul> (JL719C only introduced as a v2 model)	The QSA28 is not supported for use in ports not listed (hardware or ASIC limitations). Use of 10G or 25G optic will automatically be detected. No configuration of the port is needed. No DAC or AOC support, JL563A or B (10GBASE-T) not supported. UT-mode optics may work (unsupported)
Aruba 8400 Module: <ul style="list-style-type: none"> <li>▪ Aruba 8400X 8p 40G QSFP+ Adv Module (JL365A)</li> <li>▪ Aruba 8400X 6p 40G/100G QSFP28 Adv Module (JL366A)</li> </ul>	Not supported	
Aruba 9300 32D series	Not supported	
Aruba 9300S 32C8D models	10.14.100x QSA28 allowed in all ports	Ports 1-8 & 33-40 These ports cannot split, but do allow the use of the QSA28 adapter.  9300S requires configuration of port-groups to enable 25G speeds.  25G thru a QSA28 is enabled using <b>speed-group 1</b> for the selected port (organized in groups of 4).  10G thru a QSA28 is enabled using <b>speed-group 2</b> for the selected port.
Aruba 10000 48Y6C models <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	Min Software: 10.09.0001 <ul style="list-style-type: none"> <li>▪ 49-54</li> <li>▪ 49-54</li> </ul>	Use of 10G or 25G optic will automatically be detected. No DAC or AOC support, JL563A or B (10GBASE-T) not supported. UT-mode optics may work (unsupported)

### 40G QSFP+ optical transceiver modules that use MPO connectors



#### Models, specifications, and compatibility

QSFP+ optical transceiver modules provide a transmission rate of 40 Gbps and use multifiber push on (MPO) connectors.



40G SR4 and eSR4 are not supported for use over MMF OM1 or OM2 quality fiber. (The IEEE standard does not state a specification). Use MPO female connectors for use with the MPO transceivers. See [Overview](#) for information regarding MPO connectors and cable requirements.

#### Specifications for QSFP+ optical transceiver modules that use MPO connectors

Product name (SKU)	DOM - Digital Optical Monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter (µm)	Modal bandwidth (MHz*km)	Transmission distance
HPE X142 40G QSFP+ MPO SR4 Transceiver (JH231A)	YES (1990-4554 1990-4557 1990-4737)	4 lanes, 850 4x10G NRZ	MMF	50/125	2000 (OM3) 4700 (OM4)	100 m (328.08 ft) 150 m (492.12 ft)
HPE X142 40G QSFP+ MPO eSR4 300M xcvr (JH233A)	YES (1990-4555)	4 lanes, 850 4x10G NRZ	MMF	50/125	2000 (OM3) 4700 (OM4)	300 m (984.25 ft) 400 m (1312.34 ft)

40G SR4/eSR4 optics can be used by a QSFP28/QSFP+ port that can be "split" into four channels of 10G (available on select switch models/modules on identified ports). See *Split capabilities of specific models* in the [Breakout optical cables](#) section.

40G SR4/eSR4 are not supported for use over MMF OM1/OM2 quality fiber.

The IEEE standard did not specify any requirements for use over these types.

The following optical breakout cables can be used with 40G SR4/eSR4 to split into 4x 10G SR compatible streams. These cables are ordered from the HPE Compute and Server or Storage business units and may not be available to Aruba-only resellers.

Fiber breakout cables (from HPE Server products):

- (Storage SKU) K2Q46A, HPE MPO to 4 x LC 5m Cable
- (Storage SKU) K2Q47A, HPE MPO to 4 x LC 15m Cable

These are physical connect (PC) style MPO connectors. Do not use for optics that require angled physical connect (APC) MPO connectors. Refer to [Splitting of QSFP+ and QSFP28 ports](#) for a comparison of APC, PC, and UPC connectors.

AOS-CX release 10.05 and later supports a `split` command configured on 100G QSFP28 or 40G QSFP+ ports. See [Splitting of QSFP+ and QSFP28 ports](#).

**Optical specifications for QSFP+ optical transceiver modules that use MPO connectors**

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
HPE X142 40G QSFP+ MPO SR4 Transceiver (JH231A)	MPO (PC polished, 12-fiber)	-7.6 to 0	-9.5 to +2.4
HPE X142 40G QSFP+ MPO eSR4 300M xcvr (JH233A)	MPO (PC polished, 12-fiber)	-7.6 to 0	-9.9 to +2.4

**Compatibility for the QSFP+ optical transceiver modules that use MPO connectors**

(see [Unsupported transceiver mode](#))

QSFP+ (40G) capable Product name (SKU)	Minimum software required	Comments
Aruba 3810M/2930M 1QSFP+ 40GbE Module (JL078A)	All	No optical split capability on AOS-Switch series: 3810M, 2930M, 5400R
Aruba 3810M 24G 1-slot Switch 2QSFP+ 40GbE Module (JL079A)	All	
Aruba 20p PoE+ / 1p 40GbE QSFP+ v3 zl2 Module (J9992A)	KB.15.17	
Aruba 2p 40GbE QSFP+ v3 zl2 Module (J9996A)	KB.15.17	
Aruba 6300 with QSFP ports (S0E91A, S0X44A)	10.13.000x	S0E91A/S0X44A models require interface group 2 or 3 to configure either 40G or 100G speed operation. No support for splitting of SR4 optics
Aruba 6400 12p 40G/100G QSFP28 Module R0X45A Module R0X45C	10.04.2000 10.09.1000	No support for splitting of SR4 optics. Aruba 6400 modules with QSFP28 ports do not have split mode enabled in AOS-CX as of the 10.13.1000 release.
HPE ANW 6400 32SFP28 4QSFP28 MACsec v2 Mod (S0E48A)	10.13.1010	



QSFP+ (40G) capable Product name (SKU)	Minimum software required	Comments
Aruba 8100: All models	JH231A/JH233A: 10.12.1000	8100 48 port models cannot split a 40G SR4 optic. (not enough MACs in the system)
Aruba 8320 48p SFP/SFP+ & 6p 40G QSFP+ Switch (JL479A)	JH231A/JH233A: 10.00.0006	40G SR4/eSR4 can be optically split as of: 10.05.0001
Aruba 8320 32p 40G QSFP+ Switch (JL579A)	JH231A/JH233A: 10.00.0012	JL579A limits to only ports 5-28 See <a href="#">Splitting of QSFP+ and QSFP28 ports.</a>
Aruba 8320 48p G /6p 40G QSFP+ Switch (JL581A)	JH231A/JH233A: 10.00.0012	
Aruba 8325 32C models JL636A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	JH231A/JH233A: 10.03.0030	40G SR4/eSR4 can be optically split: 10.05.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports.</a>
Aruba 8325 48Y8C models JL635A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	10.03.0030	40G SR4/eSR4 can be optically split: 10.05.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports.</a>
8360 32Y4C models JL717A/JL717C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL700A/JL701C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C Power-to-Port model</li> </ul>	JH231A, JH233A: 10.06.0001	40G SR4/eSR4 can be optically split as of: 10.06.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports.</a>
8360 16Y2C models JL718A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul>	JH231A, JH233A: 10.06.0001	40G SR4/eSR4 can be optically split as of: 10.06.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports.</a>
8360 48XT4C model JL720A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL706A/JL706C(v2) Port-to-Power model</li> <li>▪ JL707A/JL707C(v2) Power-to-Port model</li> </ul>	JH231A, JH233A: 10.06.0001	8360 48XT4C does not support split ports
8360 12C models JL721A displayed by CLI <b>show system</b>	JH231A, JH233A: 10.06.0001	40G SR4/eSR4 can be optically split as of: 10.06.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports.</a>

QSFP+ (40G) capable Product name (SKU)	Minimum software required	Comments
<ul style="list-style-type: none"> <li>▪ JL708A/JL708C(v2) Port-to-Power model</li> <li>▪ JL709A/JL709C(v2) Power-to-Port model</li> </ul>		
8360 24XF2C models JL722A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port model</li> </ul>	JH231A, JH233A: 10.06.0001	40G SR4/eSR4 can be optically split as of: 10.06.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports</a> .
8360 48Y6C models JL719C displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul>	JH231A, JH233A: 10.09.0002	40G SR4/eSR4 can be optically split See <a href="#">Splitting of QSFP+ and QSFP28 ports</a> . MACsec available on ports 53-54 and via split 10G on these ports (MACsec not available on ports 49-52)
Aruba 8400X Modules: 8p 40G QSFP+ Advanced Module (JL365A)	JH231A, JH233A:10.00.0006	40G SR4/eSR4 can be optically split: 10.05.0001
Aruba 8400X Modules: 6p 40G/100G QSFP28 Advanced Module (JL366A)	JH231A, JH233A:10.00.0006	10.00.0005 supports 100G products. 10.00.0006 provides additional support for 40G on the JL366A. JL366A module: 40G SR4/eSR4 can be optically split: 10.05.0001 See <a href="#">Splitting of QSFP+ and QSFP28 ports</a> .
Aruba 9300 32D series	JH231A, JH233A: 10.11.1000	
Aruba 9300S Switch Series -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ US0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>	JH231A, JH233A: 10.13.1000	9300S requires configuration of port-groups to enable 40G speeds. 40G is enabled using speed-group 2 for the selected port (in groups of 4). The center QDD ports (17-24) do not need a command, and are auto-sensing.  40G SR4/eSR4 can only be optically split when the switch is configured for split profile.
Aruba 10000 48Y6C models R8S96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JH231A, JH233A: 10.10.0002	

## 40G QSFP+ optical transceiver modules that use LC connectors



### Models, specifications, and compatibility

QSFP+ optical transceiver modules provide a transmission rate of 40 Gbps and use LC connectors.

#### Specifications for QSFP+ transceiver modules that use LC connectors

QSFP+ (40G) capable Product name (SKU)	DOM - Digital Optical Monitoring (4x4)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter (μm)	Modal bandwidth (MHz*km)	Transmission distance
Aruba 40G QSFP+ LC BiDi 150m MMF xcvr (JL308A)	YES (1990-4679)	Dual 20Gb/s: <ul style="list-style-type: none"> <li>850</li> <li>900</li> </ul>	MMF	50/125	2000 (OM3) 4700 (OM4)	100m (328.08 ft) 150m (492.12 ft) Not supported on OM1/OM2.
HPE X142 40G QSFP+ LC LR4 SM Transceiver (JH232A)	YES (1990-4556)	Four lanes: <ul style="list-style-type: none"> <li>1271</li> <li>1291</li> <li>1311</li> <li>1331</li> </ul> 4x10G NRZ	SMF	9/125	N/A	10km (6.21 miles)
Aruba 40G QSFP+ LC ER4 40km SMF Transceiver (Q9G82A)	YES (1990-4734)	Four lanes: <ul style="list-style-type: none"> <li>1271</li> <li>1291</li> <li>1311</li> <li>1331</li> </ul> 4x10G NRZ	SMF	9/125	N/A	30km (18.6 miles) over SMF for No-FEC 40km (24.86 miles) requires FEC (Forward Error Correction) on both ends of the engineered link using this optic to achieve this maximum distance

**Optical specifications for QSFP+ transceiver modules that use LC connectors**

Product name (SKU)	Optical parameters (dBm)	
	Transmit power	Receive power
Aruba 40G QSFP+ LC BiDi 150m MMF Transceiver (JL308A)	-4 to +5	-6 to +5
HPE X142 40G QSFP+ LC LR4 SM Transceiver (JH232A)	-7 to +2.3 per lane	-13.7 to +2.3 per lane
Aruba 40G QSFP+ LC ER4 40km SMF xcvr (Q9G82A)	-2.7 to 4.5 dBm	-21.2 to -4.5 dBm (Use 9dB attenuator for short SMF cables)

**Compatibility for the QSFP+ optical transceiver modules that use LC connectors**

(see [Unsupported transceiver mode](#))

Product name (SKU)	Minimum software required	Comments
Aruba 3810M/2930M 1QSFP+ 40GbE Module (JL078A)	JH232A: all JL308A: KB.16.04.0008 or WC.16.04.0008 Q9G82A: Not supported	
Aruba 3810M 2QSFP+ 40GbE Module (JL079A)	JH232A: all JL308A: KB.16.04.0008 Q9G82A: Not supported	The JL079A 2p 40G module is not supported in the 2930M series nor on the 3810M 16SFP+ 2-slot switch (JL075A).
Aruba 20p PoE+ / 1p 40GbE QSFP+ v3 zl2 Module (J9992A)	JH232A: KB.15.17 JL308A: KB.16.04.0008 Q9G82A: Not supported	
Aruba 2p 40GbE QSFP+ v3 zl2 Module (J9996A)	JH232A: KB.15.17 JL308A: KB.16.04.0008 Q9G82A: Not supported	
Aruba 6300 with QSFP28 ports (S0E91A/S0X44A)	JH232A, JL308A, Q9G82A: 10.13.1000	S0E91A/S0X44A models requires the <b>system interface-group</b> command to configure either 40G or 100G speed operation.
Aruba 6400 12p 40G/100G QSFP28 Module (R0X45A/R0X45C)	JH232A/JL308A/Q9G82A: 10.04.2000	The minimum software release for the R0X45C is 10.09.1000.
Aruba 8100: All models	JH232A/JL308A/Q9G82A: 10.12.0001	
Aruba 8320 48p SFP/SFP+ & 6p 40G QSFP+ Switch (JL479A)	JH232A: 10.00.0006 JL308A: 10.00.0006 Q9G82A: 10.00.0018	
Aruba 8320 32p 40G QSFP+ Switch (JL579A)	JH232A: 10.00.0012 JL308A: 10.00.0012	

Product name (SKU)	Minimum software required	Comments
	Q9G82A: 10.00.0018	
Aruba 8320 48p G /6p 40G Q SFP+ Switch (JL581A)	JH232A: 10.00.0012 JL308A: 10.00.0012 Q9G82A: 10.00.0018	
Aruba 8325 32C models JL636A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	JH232A, JL308A, Q9G82A: 10.03.0030	
Aruba 8325 48Y8C models JL635A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	JH232A, JL308A, Q9G82A: 10.03.0030	
Aruba 8360 series	JH232A, JL308A, Q9G82A: 10.06.0001	
Aruba 8360 48Y6C models: JL719C	JH232A, JL308A, Q9G82A: 10.09.0002	
Aruba 8400X Modules: 8p 40G QSFP+ Advanced Module (JL365A)	JH232A: all JL308A: all Q9G82A: 10.00.0018	
Aruba 8400X Modules: 6p 40G/100G QSFP28 Advanced Module (JL366A)	JH232A: 10.00.0006 JL308A: 10.00.0006 Q9G82A: 10.00.0018	10.00.0005 provides support for 100G products. 10.00.0006 provides additional support for 40G on the JL366A.
Aruba 9300 32D series	JH232A, JL308A, Q9G82A: 10.11.1000	
<b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>	JH232A, JL308A, Q9G82A: 10.13.1000	9300S requires configuration of port-groups to enable 40G speeds. 40G is enabled <b>using speed-group 2</b> for the selected port (in groups of 4). The center QDD ports (17-24) do not need a command, and are auto-sensing.
<b>Aruba 10000 48Y6C models</b> R8S96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JH232A(LR4): 10.10.0002 JL308A(BiDi): 10.09.0010 Q8G82A(ER4): 10.10.0002	

## 40G QSFP+ DAC and breakout DAC (copper cables)



Direct Attach over Copper (DAC) cables have a minimum bend radius of typically 10x the diameter of the cable (approximately 2.75" [70mm] bend radius). Handle DAC cables carefully to ensure that you do not crimp or bend the cable; otherwise, you risk damaging the cable.

### Models, specifications, and compatibility

#### Specifications for QSFP+ copper cables

Product name (SKU)	Cable length	Data rate
HPE X242 40G QSFP+ to QSFP+ 1m DAC Cable (JH234A)	1 m (3.28 ft)	40 Gbps
HPE X242 40G QSFP+ to QSFP+ 3m DAC Cable (JH235A)	3 m (9.84 ft)	
HPE X242 40G QSFP+ to QSFP+ 5m DAC Cable (JH236A)	5 m (16.40 ft)	

The following DAC breakout cable is offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.

AOS-CX releases 10.05 and later support a `split` command configured on 100G QSFP28 ports.



As of the AOS-CX 10.05 and 10.06 releases, the configuration requires a save and reboot of the switch or module. See the *Monitoring Guide* for details on the `split` command.

See [Splitting of QSFP+ and QSFP28 ports](#) for more information.

#### Specifications for HPE QSFP+ breakout DAC cables (from HPE Server products)

Product name (SKU)	Cable length	Data rate
*HPE BLc 40G QSFP+ 4x10G SFP+ 3m DAC Cbl (721064-B21)	3m (9.84ft)	40G to 4 x 10G

**Compatibility for the QSFP+ DAC and breakout DAC copper cables**

(see [Unsupported transceiver mode](#))

\* HPE Server product - may not be available to Aruba resellers

QSFP+ (40G) DAC capable product name (SKU)	Minimum software required	Comments
Aruba 3810M/2930M 1QSFP+ 40GbE Module (JL078A)	JH234A, JH235A, JH236A: All *721064-B21: Not supported	
Aruba 3810M 2QSFP+ 40GbE Module (JL079A)	JH234A, JH235A, JH236A: All *721064-B21: Not supported	The JL079A module is not supported in the 2930M series nor on the 3810M 16SFP+ 2-slot Switch (JL075A)
Aruba 20p PoE+ / 1p 40GbE QSFP+ v3 zl2 Module (J9992A)	JH234A, JH235A, JH236A: KB 15.17 *721064-B21: Not supported	
Aruba 2p 40GbE QSFP+ v3 zl2 Module (J9996A)	JH234A, JH235A, JH236A: KB 15.17 *721064-B21: Not supported	
Aruba 6300 (select models) JL658A Aruba 6300M 24SFP+ 4SFP56 Swch JL663A Aruba 6300M 48G 4SFP56 Swch JL762A Aruba 6300M 48G Pwr2Prt 2F 1PS Bdl R8S92A Aruba 6300M 24G 2SFP56 2p25G Swch  Aruba 6300 with QSFP28 ports (S0E91A/S0X44A)	*721064-B21: 10.10.1000  JH234A, JH235A, JH236A: 10.13.1000 *721064-B21: Not supported	721064-B21: SFP+ ends only of the split cable from HPE Compute parts  S0E91A/S0X44A models require interface group 2 or 3 to configure either 40G or 100G speed operation.
Aruba 6400 12p 40G/100G QSFP28 Module (R0X45A/R0X45C)	JH234A, JH235A, JH236A: 10.04.2000 *721064-B21: Not supported	The minimum software release for the R0X45C is 10.09.1000. 721064-B21 not supported on either R0X45A/R0X45C
Aruba 8100 switch series	JH234A, JH235A, JH236A: 10.12.0006 *721064-B21: Not supported	
Aruba 8320 48p 10G SFP/SFP+ and 6p 40G QSFP+ Switch (JL479A)	JH234A, JH235A, JH236A: 10.00.0012 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxxx" are supported by 10.10.1060

QSFP+ (40G) DAC capable product name (SKU)	Minimum software required	Comments
		code (nothing available to 10.06 or 10.07). 10.08 release added support for the 10G ends of the 721064-B21 split DAC
Aruba 8320 32p 40G QSFP+ Switch (JL579A)	JH234A, JH235A, JH236A: 10.00.0012  *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	8320 JL579A only allows splitting of ports 5-28 (center 24 ports) 721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). Only the QSFP end is supported The 10G ends are NOT supported thru the use of the QSA28 used in any QSFP+ port on this model.
Aruba 8320 48p 10GBT 6p 40G QSFP+ Switch (JL581A)	JH234A, JH235A, JH236A: 10.03.0030 *721064-B21: : Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). 10.08 release added support for the 10G ends of the 721064-B21 split DAC
<b>Aruba 8325 32C models</b> JL636A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	JH234A, JH235A, JH236A: 10.00.0012 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	8325 JL636A allows splitting of all 32 ports. 721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in



QSFP+ (40G) DAC capable product name (SKU)	Minimum software required	Comments
		10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). Only the QSFP end is supported. The 10G ends are NOT supported thru the use of the QSA28 used in any QSFP+ port on this model.
<b>Aruba 8325 48Y8C models</b> JL635A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	JH234A, JH235A, JH236A: 10.03.0030 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	8325 JL635A allows splitting of all 8 ports 721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). 10.08 release added support for the 10G ends of the 721064-B21 split DAC
<b>Aruba 8360 32Y4C models</b> JL717A/JL717C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C(v2) Power-to-Port model</li> </ul>	JH234A, JH235A, JH236A: 10.06.0001 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). 10.08 release added support for the 10G ends of the 721064-B21 split DAC
<b>Aruba 8360 16Y2C models</b> JL718A/JL718C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul>	JH234A, JH235A, JH236A: 10.06.0001 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n

QSFP+ (40G) DAC capable product name (SKU)	Minimum software required	Comments
		support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). 10.08 release added support for the 10G ends of the 721064-B21 split DAC
<b>Aruba 8360 48Y6C models</b> JL719C displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul>	JH234A, JH235A, JH236A: 10.09.0002 *721064-B21: 10.09.0002 (Requires <code>split</code> command)	MACsec available on ports 53-54.
<b>Aruba 8360 48XT4C models</b> JL720A/JL720C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL706A/JL706C(v2) Port-to-Power model</li> <li>▪ JL707A/JL707C(v2) Power-to-Port model</li> </ul>	JH234A, JH235A, JH236A: 10.06.0001 *721064-B21: Can NEVER be supported	8360 48XT4C model QSFP28 ports <b>do not</b> support split-mode (hardware is not capable)
<b>Aruba 8360 12C models</b> JL721A/JL721C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL708A/JL708C(v2) Port-to-Power model</li> <li>▪ JL709A/JL709C(v2) Power-to-Port model</li> </ul>	JH234A, JH235A, JH236A: 10.06.0001 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). Only the QSFP end is supported The 10G ends are NOT supported thru the use of the QSA28 used in any QSFP+ port on this model.
<b>Aruba 8360 24XF2C models</b> JL722A/JL722C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port model</li> </ul>	JH234A, JH235A, JH236A: 10.06.0001 *721064-B21: Refer to the comments column for 8- or 9-digit serial number versions (Requires <code>split</code> command)	721064-B21: This HPE Compute SKU has two vendors: 9-digit serial numbers were first supported by 10.05.0001 BUT only for s/n starting with "1xxxxx"; 8-digit s/n support was added in 10.06.0140 & 10.07.0021. 9-digit serial number starting with "2xxxx" are supported by 10.10.1060 code (nothing available to 10.06 or 10.07). Only the

QSFP+ (40G) DAC capable product name (SKU)	Minimum software required	Comments
		QSFP end is supported The 10G ends are NOT supported thru the use of the QSA28 used in any QSFP+ port on this model.
Aruba 8400X Module: 8p 40G QSFP+ Adv Module (JL365A)	JH234A, JH235A, JH236A: 10.00.0002 *721064-B21: Not supported	8400 JL365A 8p QSFP+ module allows splitting of all 8 ports
Aruba 8400X Module: 6p 40G/100G QSFP28 Adv Module (JL366A)	JH234A, JH235A, JH236A: 10.00.0006 *721064-B21: Not supported	JL366A 6p QSFP28 module no support for breakout 40G DACs
Aruba 9300 32D series	JH234A, JH235A, JH236A, *721064-B21: 10.13.1000	
<b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>	JH234A, JH235A, JH236A, *721064-B21: 10.13.1000	9300S requires configuration of port-groups to enable 40G speeds.  40G is enabled using <b>speed-group 2</b> for the selected port (in groups of 4) ports 1-16, 25-40.  The center QDD ports (17-24) do not need a command, and are auto-sensing.  The HPE Server split DAC, *721064-B21, requires a <b>split profile 2</b> configuration to be able to use in ports 13, 15-17, 19, 21, 23, 25-27 as 40G => 4x10G split port.
<b>Aruba 10000 48Y6C models</b> R8S96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JH234A, JH235A, JH236A: 10.10.0002 *721064-B21: 10.10.0002	721064-B21: The 10G ends are NOT supported through the use of the QSA28 used in any QSFP+ port on this model.

## 40G QSFP+ AOC and breakout AOC (active optical cables)



### Models, specifications, and compatibility

#### Specifications for QSFP+ 40G active optical cables

Product name (SKU)	Cable length	Data rate
Aruba 40G QSFP+ to QSFP+ 7m AOC (R0Z22A)	7 m (22.96 ft)	40 Gbps
Aruba 40G QSFP+ to QSFP+ 15m AOC (R0Z23A)	15 m (49.2 ft)	
Aruba 40G QSFP+ to QSFP+ 30m AOC (R0Z24A)	30 m (98.42 ft)	

The following 40G breakout AOC cable is offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.

AOS-CX release 10.05 and later supports a `split` command configured on 100G QSFP28 ports.



As of the AOS-CX 10.05 and 10.06 releases, the configuration requires a save and reboot of the switch or module. See the *Monitoring Guide* for details on the `split` command.

#### Specifications for HPE QSFP+ breakout 40G active optical cables (from HPE Server products)

Product name (SKU)	Cable length	Data rate
*HPE BLC QSFP+ to 4x10G SFP+ AOC 15m Opt (721076-B21)	15m (49.21 ft)	4 x 10G

#### Compatibility for QSFP+ 40G active optical cables

\* HPE Server product - may not be available to Aruba resellers

QSFP+ (40G) AOC capable product name (SKU)	Minimum software required	Comments
Aruba 6300 (select models) JL658A Aruba 6300M 24SFP+ 4SFP56 Swch JL663A Aruba 6300M 48G 4SFP56 Swch	*721076-B21: 10.08.0001	721076-B21: SFP+ ends only of the split cable from HPE Compute parts

QSFP+ (40G) AOC capable product name (SKU)	Minimum software required	Comments
JL762A Aruba 6300M 48G Pwr2Prt 2F 1PS Bdl R8S92A Aruba 6300M 24G 2SFP56 2p25G Swch  S0E91A HPE ANW 6300M 48SRX CL8 PoE 4p100G Sw S0X44A HPE ANW 6300M 48SRX CL8 4p100G TAA Sw	*721076-B21: 10.10.1000  R0Z22A,R0Z23A,R0Z24A:10.13.1000 *721076-B21: not supported	
All 8100 models	R0Z22A,R0Z23A,R0Z24A:10.12.1001 *721076-B21:10.12.1001	
Aruba 8320 48p 10G SFP/SFP+ and 6p 40G QSFP+ Switch (JL479A)	R0Z22A,R0Z23A,R0Z24A: Not supported *721076-B21: 10.06.0001 (Requires <b>split</b> command)	721076-B21: 10G ends are not supported through the use of the QSA28 adapter in any QSFP port
Aruba 8320 32p 40G QSFP+ Switch (JL579A)	R0Z22A,R0Z23A,R0Z24A: Not supported *721076-B21: 10.06.0001 (Requires <b>split</b> command)	8320 JL579A only allows splitting of ports 5-28 (center 24 ports). 721076-B21: Only the QSFP end is supported
Aruba 8320 48p 10GBT 6p 40G QSFP+ Switch (JL581A)	R0Z22A,R0Z23A,R0Z24A: Not supported *721076-B21: 10.06.0001 (Requires <b>split</b> command)	721076-B21: 10G ends are NOT supported thru the use of the QSA28 adapter in any QSFP port
<b>Aruba 8325 32C models</b> JL636A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL626A - Port-to-Power model (FB)</li> <li>▪ JL627A - Power-to-Port model (BF)</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.03.0040 *721076-B21: 10.06.0001 (Requires <b>split</b> command)	721076-B21: Only the QSFP end is supported. 10G ends are NOT supported thru the use of the QSA28 adapter in any QSFP port
<b>Aruba 8325 48Y8C models</b> JL635A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL624A -Port-to-Powermodel(FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.03.0040 *721076-B21: 10.06.0001 (Requires <b>split</b> command)	721076-B21: Both QSFP+ and SFP+ ends are supported The 8325 requires configuration of <b>interface groups</b> (groups of 12 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.
<b>Aruba 8360 32Y4C models</b> JL717A/JL717C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C(v2) Power-to-Port</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.07.0005 *721076-B21: 10.07.0005 (Requires <b>split</b> command)	721076-B21: Both QSFP+ and 10G SFP+ ends are supported (on the models with SFP28 ports). The 8360 32Y4C model requires configuration of

QSFP+ (40G) AOC capable product name (SKU)	Minimum software required	Comments
model		<b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). All other ports can individually auto-detect the speed of the inserted transceiver.
<b>Aruba 8360 16Y2C models</b> JL718A/JL718C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL702APoC(v2) -to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.07.0005 *721076-B21: 10.07.0005 (Requires <b>split</b> command)	Not applicable to the 24XF (1G/10G) model See the Hardware Guides for details.
<b>Aruba 8360 48XT4C models</b> JL720A/JL720C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL706A/JL706C(v2) Port-to-Power model</li> <li>▪ JL707A/JL707C(v2) Power-to-Port model</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.07.0005 *721076-B21: Not supported (No <b>split</b> support on the QSFP28 ports on the 48XT4C models)	
<b>Aruba 8360 12C models</b> JL721A/JL721C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL708A/JL708C(v2) Port-to-Power model</li> <li>▪ JL709A/JL709C(v2) Power-to-Port model</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.07.0005 *721076-B21: 10.07.0005 (Requires <b>split</b> command)	
<b>Aruba 8360 24XF2C models</b> JL722A/JL722C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port model</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.07.0005 *721076-B21: 10.07.0005 (only the QSFP end is supported in ports 25 and 26)	
Aruba 8360 48Y6C models JL719C displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.09.0002 *721076-B21: 10.09.0002 (Requires <b>split</b> command)	MACsec available on ports 53-54.
<b>Aruba 8400X modules</b> Aruba 8400X 32p SFP/SFP+ 10G MACsec Module (JL363A)	*721076-B21: (10G SFP+ ends) 10.06.0001 R0Z22A, R0Z23A, R0Z24A: 10.12.0001	721076-B21: 10G SFP+ end supported by 10.06.0001
Aruba 8400X 8p 40G QSFP+ Adv Module (JL365A)	*721076-B21: 10.06.0001 (Requires <b>split</b> command) R0Z22A, R0Z23A, R0Z24A: 10.12.0001	721076-B21: QSFP+ end supported in this module
Aruba 8400X 6p 40G/100G QSFP28 AdvModule (JL366A)	*721076-B21: 10.05.0001 (Requires <b>split</b> command)	721076-B21: QSFP+ end supported in this module
Aruba 8400X 32p 25G SFP28 Module (JL687A)	*721076-B21: (10G SFP+ ends) 10.06.0001	721076-B21: 10G SFP+ end supported by 10.06.0001

QSFP+ (40G) AOC capable product name (SKU)	Minimum software required	Comments
		JL687A 32p 25G module requires configuration of <b>interface groups</b> (groups of four ports) to enable use of 1G or 10G transceivers or DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.
Aruba 9300 32D series	JH234A, JH235A, JH236A: 10.11.1000 *721076-B21: not supported	
<b>Aruba 9300S Switch Series</b> -32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>	JH234A, JH235A, JH236A: 10.13.1000	9300S requires configuration of port-groups to enable 40G speeds.  40G is enabled using speed-group 2 for the selected port (in groups of 4).  Only supported in ports 1-8 & 33-40.  The center QDD ports (17-24) do not need a command, and are auto-sensing.
<b>Aruba 10000 48Y6C models</b> R8S96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	R0Z22A, R0Z23A, R0Z24A: 10.10.0002 *721076-B21: 10.10.0002 (Requires <b>split</b> command)	721076-B21: The 10G ends are NOT supported thru the use of the QSA28 used in any QSFP+ port on this model.

## 40G QSFP+ to SFP+ Adapter

See [QSFP28 to SFP28 adapter support](#) for 40G support within QSFP28 or QSFP+ ports.

### SFP56 optical transceiver modules

Always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers.

50G technology, implemented through an SFP56 port, is available on select models within the CX product family. Although 50G SFP transceivers (and 50G DACs) are the same physical size as a 1G, 10G, or 25G technology, the 50G products only work at the 50G speed and only in ports that are 50G-capable; usually marked as SFP56. There are a small number of exceptions such as the tri-speed transceivers which are specifically identified as multispeed.



### Models, specifications, and compatibility

SFP56 optical transceiver modules are a single-lane, serial 4-level Pulse Amplitude Modulation (PAM4) technology providing a transmission rate of 50 Gbps and use LC connectors. Note that 50G SFP56 technology can not be split into two 25G flows - it is a single-lane, single-wavelength technology.

#### Specifications for SFP56 optical transceiver module

Product name (SKU)	DOM-Digital Optical Monitoring	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter	Modal bandwidth (MHz*km)	Transmission distance
Aruba 50G SFP56 LC SR 100m MMF xcvr (ROM48A) Tri-speed capable	Yes 1990-4803	Single lane, 850 1x 50G PAM4	MMF	50/125	OM3	70m (229.66 ft)
					OM4 and OM5	100m (328.08 ft)



Product name (SKU)	DOM-Digital Optical Monitoring	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter	Modal bandwidth (MHz*km)	Transmission distance
HPE ANW 50G eSR 300m MMF xcvr (S0V64A) Tri-speed capable	Yes 1990-4901 1990-4900	Single lane, 850 1x 50G PAM4	MMF (duplex LC)	50/125	OM3	200m (656.16 ft)
					OM4 and OM5	300m (984.25 ft)
HPE ANW 50G LR 10km SMF xcvr (S0V65A) Tri-speed capable	Yes 1990-4857 1990-4859	Single lane, 1310 1x 50G PAM4	SMF (duplex LC)	9/125	N/A	10km (6.21 miles)
HPE ANW 50G BR10-D 1330/1270 xcvr (S1C92A)	Yes 1990-4870 1990-4866	TX: 1330 RX: 1270 1x50G PAM4	SMF (simplex LC)	9/125	N/A	10km (6.21 miles)
HPE ANW 50G BR10-U 1270/1330 xcvr (S1C94A)	Yes 1990-4869 1990-4865	TX: 1270 RX: 1330 1x50G PAM4	SMF (simplex LC)	9/125	N/A	10km (6.21 miles)
HPE ANW 50G ER 40km SMF xcvr (S0V66A)	Yes 1990-4902 1990-4888	Single lane, 1310 1x50G PAM4	SMF (duplex LC)	9/125	N/A	40km (24.86 miles)



50G SR transceivers are not supported for use over MMF OM1/OM2 quality fiber. The IEEE standard did not specify any requirements for use over these types of multimode fiber.

### Tri-speed capable 50G

AOS-CX release 10.12.0001 added the **interface speed** command. This command allows 50G SR, eSR and LR transceivers to be able to connect to remote 10G or 25G SR or LR transceivers. Distances may be limited to the 50G SR, eSR and LR capabilities.

50G transceivers can only be inserted into ports capable of 50G speeds (SFP56) or ports configured for 50G capability (e.g. 8360v2, 6300, 6400 R0X44C/S0348A module).



Despite the tri-speed capability, 50G transceivers cannot be used in a 10G or 25G only port. They identify as a 50G part, so inserting into a port not capable of 50G will result in an incompatible transceiver error message.

The 50G SR, eSR and LR transceivers do not auto-detect the remote speed. The speed must be set on the interface hosting the 50G transceiver product (SR, eSR or LR) end and it will connect to a 10G or 25G SR or LR link.



The distance that the 50G transceivers can reach are limited by the 50G xcvr (see specifications above). A 10G SR over OM4 can reach 400m, but a 50G SR or eSR can only reach the distances (70m - 300m) depending on the MMF type.

Refer to the Fundamentals Guide for the **speed** command.

### Optical specifications for SFP56 optical transceiver modules

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
Aruba 50G SFP56 LC SR 100m MMF xcvr (R0M48A) Tri-speed capable(10G, 25G, 50G)	Duplex LC (PC or UPC)	-6 to +4	-8.4 to +4.0
HPE ANW 50G eSR 300m MMF xcvr (S0V64A) Tri-speed capable(10G,25G,50G)	Duplex LC (PC or UPC)	-6.5 to +4.0	-8.4 to +4.0
HPE ANW 50G LR 10km SMF xcvr (S0V65A) Tri-speed capable(10G,25G,50G)	Duplex LC (PC or UPC)	-7.0 to +2.0	-13.3 to +2.0
HPE ANW 50G BR10-D 1330/1270 xcvr (S1C92A)	Simplex LC (PC or UPC)	-4.5 to +4.2	-10.8 to +4.2
HPE ANW 50G BR10-U 1270/1330 xcvr (S1C94A)	Simplex LC (PC or UPC)	-4.5 to +4.2	-10.8 to +4.2
HPE ANW 50G ER 40km SMF xcvr (S0V66A)	Duplex LC (PC or UPC)	0.4 to +6.6	-17.6 to -3.4 (use a 10dB attenuator for short SMF cables)

### Compatibility for the SFP56 transceiver module

SFP56 (50G) capable product name	SKU	Minimum Software required	Comments
Aruba 6300 Switch Series	All Models M/F and JL762A (F-B airflow model)	R0M48A: 10.09.1010	6300M R8S91A: ports 51-52 do not support 50G nor 25G speeds.
	R8S89A, R8S90A, R8S91A, R8S92A	R0M48A: 10.10.0002	Tri-speed capability on 50G SR, eSR, LR Optics (BiDi are single speed).


SFP56 (50G) capable product name	SKU	Minimum Software required	Comments
	S0E91A, S0X44A: 50G not supported	S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1000 (Except 6300 100G models)	6300 R8S89A, R8S90A, R8S91A, R8S92A models require <b>interface group &lt;speed&gt;</b> to enable different speed products.  6300M R8S92A: ports 26-27 do not support 50G (only 10G and 25G).
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	R0M48A, S0V64A, S0V65A, S0V66A, S1C92A, S1C94A: 10.14.0001	Supported in SFP56 ports: S3L75A: Ports 25-26 S3L76A: Ports 49-50 S3L77A: Ports 49-50
Aruba 6400 Modules	R0X39B/R0X39C, R0X40B/R0X40C, R0X41A/R0X41C, R0X42A/R0X42C, R0X43A/R0X43C	R0M48A: 10.09.1000  S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1000  Only supported in SFP56 ports	R0X43A/R0X43C: 50G optics are not supported in 10G SFP+ ports.  R0X44A does not support 50G speeds.  R0X44C enables 50G on the ports, but requires configuration of interface groups must be enabled. 50G capability (DACs or optics) is only allowed on the lower ports (even numbers) of the group and disables the use of any other connection in the upper ports (odd numbers).
	R0X44C (not supported in R0X44A)	R0M48A: 10.09.1000  S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1000  Only supported in configured bottom SFP28 ports.	R0X44C port groups are as follows: Group 1 = 1-12 Groups 2 through 7 = (13-16; 17-20; 21-24; 25- 28; 29-32; 33-36); Group 8 = 37-48.
	S1T83A/S0E48A	R0M48A, S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1010	S1T83A module SFP56 ports are auto-sensing for the supported interconnects.  S0E48A port groups are as follows: Group 1 = 1-8 Group 2 = 9-16 Group 3 = 17-24

SFP56 (50G) capable product name	SKU	Minimum Software required	Comments
			Group 4 = 25-32
Aruba 8100 Switch Series	50G not supported		The 8100 does not have any ports that can support 50G speeds
Aruba 8360 32Y4C models	JL717C(v2) displayed by CLI <b>show system</b> JL700C(v2) Port-to-Power model JL701C(v2) Power-to-Port model	ROM48A: 10.09.1000  S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1000  Only supported on even # ports 6-32	8360 v1 models (ending in "A") do not support the use of 50G transceivers. The 8360 32Y4C model requires configuration of <b>interface groups</b> (groups of four ports) to select a speed of 50G. When selected, the upper two ports in a group are disabled and both bottom ports only support the 50G speed. Ports 1-4 on the 8360 32Y4C model do not support 50G speed due to the MACsec capability limiting these ports to a maximum speed of 25G. See the Hardware Guides for details.
Aruba 8360 16Y2C models	JL718C(v2) displayed by CLI <b>show system</b> JL702C(v2) Port-to-Power model JL703C(v2) Power-to-Port model	10.09.1000  S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1000  Only supported on even # ports 2-16	8360 v1 models (ending in "A") do not support the use of 50G transceivers. The 8360 16Y2C model requires configuration of <b>interface groups</b> (groups of four ports) to select a speed of 50G. When selected, the upper two ports in a group are disabled and both bottom ports only support the 50G speed. See the Hardware Guides for details.
Aruba 8360 48Y6C models	JL719C displayed by CLI <b>show system</b> JL704C(v2) Port-to-Power model (FB) JL705C(v2) Power-to-Port model (BF)	10.09.1000  S0V64A, S0V65A, S1C92A, S1C94A, S0V66A: 10.13.1000  Only supported on even # ports 6-48	The 8360 48Y6C model requires configuration of <b>interface groups</b> (groups of four ports) to select a 50G speed. When selected, the upper two ports in a group are disabled and both bottom ports only support the 50G speed. Ports 1-4 on the 8360 48Y6C model do not support 50G speeds due to the MACsec capability limiting these ports to a maximum speed of 25G. See the Hardware Guides for details.
<b>Aruba 9300 Switch Series</b> 9300 32D 9300S 32C8D	Not supported		50G products (xcvrs, DACs and AOCs) are not supported for use through a QSA28 adapter. The QSA28 is not supported on the 9300 32D model.

SFP56 (50G) capable product name	SKU	Minimum Software required	Comments
Aruba 10000 Switch Series	50G not supported		The 10000 does not have any ports that can support 50G speeds.

## SFP56 direct attach over copper (DAC) cables

Always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers.

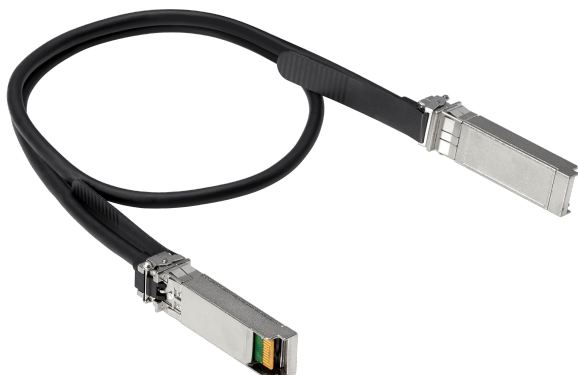

Direct Attach over Copper (DAC) cables have a minimum bend radius of typically 4x the diameter of the cable (approximately a 1" bend radius). Handle DAC cables carefully to ensure that you do not crimp or bend the cable beyond a 1" radius; otherwise, you risk damaging the cable.

## Models, specifications, and compatibility

### Specifications for SFP56 copper cables

Product name (SKU)	Cable length	Data rate
Aruba 50G SFP56 to SFP56 0.65m DAC Cable (R0M46A)	0.65m (2.13 ft)	50Gbps
Aruba 50G SFP56 to SFP56 3m DAC Cable (R0M47A)	3m (9.84 ft)	

### Compatibility for the SFP56 DAC copper cables

SFP56 (50G) DAC capable product name	SKU	Minimum software required	Comments
<b>Aruba 6300 Switch Series</b>	All models M and F	R0M46A, R0M47A: 10.04.0001	Used for stacking or switch-to-switch interconnectivity (non-stack). Only in SFP56 ports.

SFP56 (50G) DAC capable product name	SKU	Minimum software required	Comments
	R8S89A, R8S90A, R8S91A R8S92A	10.10.0002	6300 R8S89A, R8S90A, R8S91A, R8S92A models require <b>interface group &lt;speed&gt;</b> to enable different speed products.
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	R0M46A, R0M47A: 10.04.0001	Supported in SFP56 ports: S3L75A: Ports 25-26 S3L76A: Ports 49-50 S3L77A: Ports 49-50
<b>Aruba 6400 Switch Series</b>	All modules with SFP56 ports  S1T83A  S0E48A	R0M46A, R0M47A: 10.09.0002  R0M46A, R0M47A: 10.13.1000  Unsupported	S0E48A: 50G is unsupported on this module at this time
<b>Aruba 8360 Switch Series</b>	Aruba 8360 48Y6C models JL719C displayed by CLI (show system) <ul style="list-style-type: none"> <li>JL704C(v2) - Port-to-Power model (FB)</li> <li>JL705C(v2) - Power-to-Port model (BF)</li> </ul> Aruba 8360 32Y4C models JL717C (v2) displayed by CLI (show system) <ul style="list-style-type: none"> <li>JL700C(v2) Port-to-Power model</li> <li>JL701C(v2) Power-to-Port model</li> </ul> Aruba 8360 16Y2C models JL718C (v2) displayed by CLI (show system) <ul style="list-style-type: none"> <li>JL702C(v2) Port-to-Power model</li> <li>JL703C(v2) Power-to-Port model</li> </ul>	R0M46A, R0M47A: 10.09.0002	8360 v1 models (ending in "A") do not support the use of 50G transceivers. 8360 32Y4C and 48Y6C ports 2 and 4 do not support the use of 50G speeds because of the MACsec capability for ports 1-4 at 10G/25G speeds. 8360 16Y2C does not have MACsec capability. To enable 50G capability, configure <b>interface groups</b> only for applicable ports (in groups of four ports) to enable the use of 50G transceivers / DACs in the <i>lower</i> SFP28 ports. (Interface Groups default to 1G, 10G or 25G speeds.) When configured for 50G, only the bottom ports in each group are enabled, and the upper ports are disabled for any use. (The 50G bandwidth reconfigures two ports).
<b>Aruba 9300 Switch Series</b> 32D or 32C8D	Not supported		50G products (xcvrs, DACs and AOCs) are not supported for use through a QSA28 adapter. The QSA28 is not supported on the 9300 32D model.

SFP56 (50G) DAC capable product name	SKU	Minimum software required	Comments
models			
<b>Aruba 10000 Switch Series</b>	50G not supported		The 10000 does not have any ports that can support 50G speeds.

### SFP28 optical transceiver modules

SFP28 ports are 25G speed ports and similar in size to a 10G SFP+ or 1G SFP port. They have supporting circuitry to enable 25G speed transceiver, DAC, and AOC components.

Although 10G and 1G transceiver products may 'fit' into an SFP28 port, the particular switch model or module may be limited in supporting lower speeds.

See [Types of transceiver modules and network cables](#) for information regarding the type of connectors used by SFP28 port products.

25G as a standard does not specify any distance over MMF OM1 or OM2 fiber. There is no guarantee for distance. Always refer to the Datasheet or QuickSpecs for the switch product to see the current list of supported transceivers.



### Models, specifications, and compatibility

SFP28 optical transceiver modules provide a transmission rate of 25 Gbps and use LC connectors. 25G BiDi transceivers always require paired sets: a -U must pair to a -D on the opposite end of the BiDi link, using a single fiber strand and a simplex LC connector.



**Specifications for SFP28 optical transceiver modules**

Product name (SKU)	DOM-digital optical monitoring (4x4 part number)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter	Modal bandwidth (MHz*km)	Transmission distance
Aruba 25G SFP28 LC SR 100m MMF xcvr (JL484A)	Yes (partial)	Single lane, 850 1x25G NRZ	MMF	50/125	2000 (OM3)	70m (229.66 ft)
HPE ANW 25G SR SFP28 LC 100m MMF C-xcvr (S2P33A)					4700 (OM4)	100m (328.08 ft)
Aruba 25G SFP28 LC eSR 400m MMF xcvr (JL485A)	Yes (partial)	Single lane, 850 1x25G NRZ	MMF	50/125	2000 (OM3)	200m (656.16 ft)
					4700 (OM4)	400m (1,312.34 ft)
Aruba 25G SFP28 LC LR 10km SMF Transceiver (JL486A) HPE ANW 25G LR SFP28 LC 10km SMF C-xcvr(S2P34A)  HPE ANW 25G SFP LC LR 10km SMF TAA xcvr (S2N63A)	Yes (partial)	Single lane, 1310 1x25G NRZ	SMF	9/125	N/A	10km (6.21 miles)
HPE ANW 25G BR10-D 1330/1270 xcvr (S1C96A)	Yes 1990-4868 1990-4864	TX: 1330 RX: 1270 1x25G NRZ	SMF (simplex LC)	9/125	N/A	10km (6.21 miles)
HPE ANW 25G BR10-U 1270/1330 xcvr (S1C98A)	Yes 1990-4867 1990-4863	TX: 1270 RX: 1330 1x25G NRZ	SMF (simplex LC)	9/125	N/A	10km (6.21 miles)
HPE ANW 25G ER	Yes 1990-4856	Single lane, 1550 1x25G	SMF	9/125	N/A	40km (24.86 miles)

Product name (SKU)	DOM-digital optical monitoring (4x4 part number)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter	Modal bandwidth (MHz*km)	Transmission distance
40km SMF xcvr (SOV69A)	1990-4858	NRZ				



25G SR/eSR are not supported for use over MMF OM1/OM2 quality fiber.

The IEEE standard did not specify any requirements for use over these types of multimode fiber.

### Optical specifications for SFP28 optical transceiver modules

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
Aruba 25G SFP28 LC SR 100m MMF xcvr (JL484A)  HPE ANW 25G SR SFP28 LC 100m MMF C-xcvr (S2P33A)	Duplex LC (PC or UPC)	-8.4 to +2.4	-10.3 to +2.4
Aruba 25G SFP28 LC eSR 400m MMF xcvr (JL485A)	Duplex LC (PC or UPC)	-8.4 to +2.4	-10.3 to +2.4
Aruba 25G SFP28 LC LR 10km SMF xcvr (JL486A)  HPE ANW 25G LR SFP28 LC 10km SMF C-xcvr(S2P34A)  HPE ANW 25G SFP LC LR 10km SMF TAA xcvr (S2N63A)	Duplex LC (PC or UPC)	-7.0 to +2.0	-13.3 to +2.0
HPE ANW 25G BR10-D 1330/1270 xcvr (S1C96A)	Simplex LC (PC or UPC)	-7.0 to +2.0	-13.3 to +2.0
HPE ANW 25G BR10-U 1270/1330 xcvr (S1C98A)	Simplex LC (PC or UPC)	-7.0 to +2.0	-13.3 to +2.0
HPE ANW 25G ER 40km SMF xcvr (SOV69A)	Duplex LC (PC or UPC)	-3.0 to +6.0	-21.0 to -4.0 (use a 10dB attenuator for short SMF cables)

**Compatibility for the SFP28 transceiver modules**

SFP28 (25G) capable product name	SKU	Minimum software required	Comments
<p><b>Aruba 6300 Switch Series</b></p>	<p>All models M and F</p> <p>JL762A (F-B airflow model)</p> <p>R8S89A, R8S90A, R8S91A, R8S92A</p> <p>S0E91A,S0X44A (4x100G models)</p> <p>QSFP28 ports can support these optical products through a QSA28</p>	<p>JL484A (SR) JL485A (eSR) JL486A (LR): 10.04.0001 S2P33A, S2P34A (25G C-Class): 10.13.1010</p> <p>JL484A (SR) JL485A (eSR) JL486A (LR): 10.04.3000 S2P33A, S2P34A (25G C-Class): 10.13.1010</p> <p>JL484A (SR) JL485A (eSR) JL486A (LR): 10.10.0002 S2P33A, S2P34A (25G C-Class): 10.13.1010</p> <p>JL484A (SR) JL485A (eSR) JL486A (LR): 10.13.000x S1C96A/S1C98A(25G 10km BiDi), S0V69A(25G ER): 10.13.100x</p> <p>S2N63A (25G LR TAA): 10.13.1000 see comments</p> <p>S2P33A, S2P34A(25G C-Class): 10.13.1010</p>	<p>S2N63A 25G LR TAA only enabled on R8S92A 6300 model</p> <p>R8S89A, R8S90A and R8S92A require <b>interface-group {n} speed 10</b> applicable to the last 2 ports to use 10G (the ports default to 25G use-case). This is different than other 6300 models that auto-detect the inserted transceiver.</p> <p>This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. (ZTP is OK on these models if 25G optics are used, 25G is the default). R8S91A last 2 ports are 10G (LRM capable) and can use 10G optics without issue for ZTP(10G is the default for ports 51 &amp; 52).</p>
<p><b>Aruba 6300L Switch Series</b></p>	<p>S3L75A, S3L76A, S3L77A</p>	<p>JL484A (SR), S2P33A (SR C-class), JL485A (eSR), JL486A (LR), S2P34A (LR C-class), S2N63A (LR TAA), S1C96A/S1C98A (10km BiDi), S0V69A (ER): 10.14.0001</p>	<p>Supported in SFP56 and SFP28 ports: S3L75A: ports 25-28 S3L76A: ports 49-52 S3L77A: ports 49-50 (not 51-52)</p>
<p><b>Aruba 6400 Modules</b></p>	<p>R0X39B, R0X40B, R0X41A, R0X42A, R0X43A</p>	<p>JL484A (SR) JL485A (eSR) JL486A (LR): 10.04.1000 Only supported in modules with SFP56 or SFP28 ports (not the SFP+ on R0X43A/R0X43C</p>	<p>R0X39A/R0X40A (revision A) are no longer supported for use in the 6400 series.</p> <p>R0X43A/R0X43C: 25G optics are not supported in 10G SFP+ ports.</p>

SFP28 (25G) capable product name	SKU	Minimum software required	Comments
		modules) S1C96A/S1C98A (25G BiDi), S0V69A (25G ER): 10.13.100x	R0X44A/R0X44C auto-detects the inserted type of transceiver. It does not require any interface groups like the 8325.
	R0X44A	JL484A (SR) JL485A (eSR) JL486A (LR):10.04.2000 S2P33A, S2P34A (25G C-Class): 10.13.1010 Supported in all SFP28 ports  S1C96A/S1C98A (25G BiDi), S0V69A (25G ER): 10.13.100x	S0E48A 25G module defaults to use 25G products.  Interface groups must be enabled to change to 10G capability (DACs or Optics). When set, only 10G optics can be used in the selected port group.  S0E48A port groups are as follows: Group 1 = 1-8 Group 2 = 9-16 Group 3 = 17-24 Group 4 = 25-32
	R0X39C, R0X40C, R0X41C, R0X42C, R0X43C, R0X44C	JL484A (SR) JL485A (eSR) JL486A (LR):10.09.1000 S2P33A, S2P34A (25G C-Class): 10.13.1010 S1C96A/S1C98A (25G BiDi), S0V69A (25G ER): 10.13.100x	
	S1T83A/S0E48A	JL484A (SR) JL485A (eSR) JL486A (LR) S1C96A/S1C98A, S0V69A: 10.13.100x S2P33A, S2P34A (25G C-Class): 10.13.1010	
	All modules above:	JL484A (SR) S2P33A (SR C-class) JL485A (eSR) JL486A (LR) S2P34A (LR C-class) S2P33A, S2P34A (25G C-Class): 10.13.1010	
Aruba 8100 Switch Series all models	QSFP28 ports can support these through a QSA28	25G SR, eSR, LR: 10.12.000x  S1C96A/S1C98A(25G 10km BiDi), S0V69A(25G ER): 10.13.100x  S2P33A, S2P34A (25G C-Class): 10.13.1010	25G transceivers on the 8100 only in the QSFP28 ports using a QSA28 adapter
Aruba 8325 48Y8C models	JL635A displayed by CLI <b>show system</b>	10.02.0001	The 8325 requires configuration of <b>interface groups</b> (groups of 12 ports)

SFP28 (25G) capable product name	SKU	Minimum software required	Comments
	<ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul> QSFP28 ports can support these optical products through a <a href="#">QSA28</a>	S1C96A/S1C98A (25G 10km BiDi), S0V69A(25G ER): 10.13.100x  S2P33A, S2P34A (25G C-Class): 10.13.1010	to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed).  See the Hardware Guides for details.
Aruba 8360 32Y4C models	JL717A/JL717C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C(v2) Power-to-Port model</li> </ul> QSFP28 ports can support these optical products through a <a href="#">QSA28</a>	10.06.0001  S1C96A/S1C98A(25G 10km BiDi), S0V69A(25G ER): 10.13.100x	The 8360 32Y4C model requires configuration of interface groups only for ports 1-4 (as group number 1) to enable the use of 10G transceivers / DACs in the SFP28 ports (interface groups default to 25G speed). Ports 1-4 on the 8360 32Y4C model do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted transceiver. Not applicable to the 24XF (1G/10G) model 10G LRR TAA only enabled on 8360/48Y6C (JL719C-JL704C/JL705C). See the Hardware Guides for details.
Aruba 8360 16Y2C models	JL718A/JL718C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul> QSFP28 ports can support these optical products through a <a href="#">QSA28</a>	10.06.0001  S1C96A/S1C98A(25G 10km BiDi), S0V69A(25G ER): 10.13.100x	
Aruba 8360 48Y6C models	JL719C displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul> QSFP28 ports can support these optical products through a <a href="#">QSA28</a>	10.09.0002  S2P33A, S2P34A (25G C-Class): 10.13.1010	MACsec available on ports 1-4 10G or 25G speeds
Aruba 8400X Modules	JL687A	10.04.2000  S1C96A/S1C98A, S0V69A: not supported	JL687A 32p 25G module requires configuration of interface groups (groups of four ports) to enable use of 1G or 10G transceivers or DACs in the

SFP28 (25G) capable product name	SKU	Minimum software required	Comments
		S2P33A, S2P34A (25G C-Class): 10.13.1010	SFP28 ports (Interface Groups default to 25G speed). See the <i>Hardware Guides</i> for details.
9300 Series	Not supported		25G products (xcvrs, DACs and AOCs) are not supported for use on the 9300-32D model. There is no support for the QSA28 adapter.
<b>Aruba 9300S Switch Series</b>	-32C 8D models displayed by CLI <b>show system</b> Base models: S0F95A-TAA Base, S0F96A-Base <ul style="list-style-type: none"> <li>▪ S0F81A FB TAA</li> <li>▪ S0F82A FB</li> <li>▪ S0F83A BF TAA</li> <li>▪ S0F84A BF</li> <li>▪ S0F87A BF DC TAA</li> <li>▪ S0F88A BF DC</li> </ul>	Requires QSA28: JL448A, JL485A, JL486A, S0V69A: 10.14.0001  S1C96A/S1C98A (25G 10km BiDi), S2P33A, S2P34A (25G C-Class): not supported	Ports 1-8 and 33-48 can not be split, but are capable of using the QSA28 adapter. QSA28 can be used in all ports (1-40).  25G xcvrs: The 9300S uses split profiles with the <b>system interface-profile split &lt;NAME&gt;</b> command. Use <b>profile-2</b> to enable 25G downstream splits (10 ports: 13,15-17, 19, 21, 23, 25-27) . See the AOS-CX Fundamentals Guide for 9300 switches for more information about the <b>system interface-profile</b> command.
Aruba 10000 48Y6C models	R8S96A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JL484A(SR), JL485A(eSR): 10.10.0002 JL486A(LR): 10.10.0002  S1C96A/S1C98A(25G 10km BiDi), S0V69A(25G ER): not supported  S2P33A, S2P34A (25G C-Class): 10.13.1010	The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (set speed back to 25G for default). See the <i>Hardware Guides</i> for details.

## 25G SFP28 Direct Attach over Copper (DAC) cables

Always refer to the Datasheet or QuickSpecs for the Switch product to see the current list of supported transceivers.





Direct Attach over Copper (DAC) cables have a minimum bend radius of typically 4x the diameter of the cable (approximately a 1" bend radius). Handle DAC cables carefully to ensure that you do not crimp or bend the cable beyond a 1" radius; otherwise, you risk damaging the cable.

## Models, specifications, and compatibility

### Specifications for SFP28 DACs

Product name (SKU)	Cable length	Data rate
Aruba 25G SFP28 to SFP28 0.65m DAC Cable (JL487A)	0.65m (2.13 ft)	25 Gbps
Aruba 25G SFP28 to SFP28 3m DAC Cable (JL488A)	3m (9.8ft)	
Aruba 25G SFP28 to SFP28 5m DAC Cable (JL489A)	5m (16.40 ft)	

The following DAC cables are offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.

### Specifications for HPE SFP28 DACs (from HPE Server Products)

Product name (SKU)	Cable length	Data rate
*HPE 25Gb SFP28 to SFP28 3m DAC (844477-B21)	3m (9.84 ft)	25 Gbps
*HPE 25Gb SFP28 to SFP28 5m DAC (844480-B21)	5m (16.40 ft)	

### Compatibility for the SFP28 DACs

\* HPE Server product. May not be available to Aruba resellers

SFP28 (25G) DAC capable product name	SKU	Minimum software required	Comments
Aruba 6300 Switch Series	All models M and F	JL487A, JL488A, JL489A: 10.04.0001 *844477-B21 and *844480 B21: 10.08.0001 (see note)	844477-B21 and 844480-B21: only supported on uplink ports on these 6300 models: JL658A, JL663A and JL762A. Intermittent issues seen with HPE Servers NICs. See details in <a href="#">HPE Servers and Systems Support</a>
	R8S89A, R8S90A, R8S91A R8S92A	JL487A, JL488A, JL489A: 10.10.0002 *844477-B21 and *844480 B21: 10.10.0002 (see note)	6300 R8S89A, R8S90A, R8S91A, R8S92A models require <b>interface group &lt;speed&gt;</b> to enable different speed products.
	S0E91A, S0X44A (100G models)	25G DACs not supported	DACs are not allowed through QSA28 adapters.

SFP28 (25G) DAC capable product name	SKU	Minimum software required	Comments
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	JL487A, JL488A, JL489A: 10.14.0001 *844477-B21, *844480 B21: Not supported	Supported in SFP56 & SFP28 ports: S3L75A: ports 25-28 S3L76A: ports 49-52 S3L77A: ports 49-50 (not 51-52)
Aruba 6400 modules with SFP56 ports	R0X39B, R0X40B R0X41A, R0X42A, R0X43A	JL487A, JL488A, JL489A: 10.04.1000 Only supported in SFP56 ports *844477-B21 and *844480-B21: 10.08.0001	R0X39A/R0X40A (revision A) are no longer supported for use in the 6400 series.  R0X43A/R0X43C: 25G DACs are not supported in 10G SFP+ ports.  R0X44A/R0X44C auto-detects the inserted type of transceiver; it does NOT require any interface groups like the 8325.  Intermittent issues seen with HPE Servers NICs. See details in <a href="#">HPE Servers and Systems Support</a>
	R0X39C, R0X40C R0X41C, R0X42C, R0X43C R0X43A	10.09.1000	
	R0X44A	JL487A, JL488A, JL489A: 10.04.1000 Only supported in SFP56 ports *844477-B21 and *844480-B21: 10.08.0001	
	R0X44C	JL487A, JL488A, JL489A, *844477-B21 and *844480-B21: 10.09.1000	
	S1T83A	JL487A, JL488A, JL489A, *844477-B21 and *844480-B21:10.13.1000	
Aruba 8325 48Y8C models	JL635A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	JL487A, JL488A, JL489A: 10.03.0030 *844477-B21 and *844480-B21: 10.04.1000	The 8325 requires configuration of interface groups (groups of 12 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports interface groups default to 25G speed). See the Hardware Guides for details.  844477-B21 and 844480-B21: verified against HPE interconnects listed in <a href="#">HPE</a>



SFP28 (25G) DAC capable product name	SKU	Minimum software required	Comments
			<a href="#">Servers and Systems Support</a>
8360 32Y4C models	JL717A/JL717C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL700A/JL700C(v2) Port-to-Power model</li> <li>JL701A/JL701C(v2) Power-to-Port model</li> </ul>	JL487A, JL488A, JL489A: 10.06.0001 *844477-B21 and *844480-B21: 10.06.0001	The 8360 32Y4C model requires configuration of interface group only for ports 1-4 (as group number one) to enable the use of 10G transceivers/DACs in the SFP28 ports (interface groups default to 25G speeds). Ports 1-4 on the 8360 32Y4C model do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted transceiver. Not applicable to the 24XF (1G/10G) model. See the Hardware Guides for details. Intermittent issues seen with HPE Server NICs. See details in <a href="#">HPE Servers and Systems Support</a> .
8360 16Y2C models	JL718A/JL718C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL702A/JL702C(v2) Port-to-Power model</li> <li>JL703A/JL703C(v2) Power-to-Port model</li> </ul>	JL487A, JL488A, JL489A: 10.06.0001 *844477-B21 and *844480-B21: 10.06.0001	Intermittent issues seen with HPE Server NICs. See details in <a href="#">HPE Servers and Systems Support</a> .
8360 48Y6C models	JL719C displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>JL704C(v2) Port-to-Power model (FB)</li> <li>JL705C(v2) Power-to-Port model (BF)</li> </ul>	JL487A, JL488A, JL489A: 10.09.0002 Supported in all SFP28 ports *844477-B21 and *844480-B21: 10.09.0002	MACsec available on ports 1-4 10G or 25G speeds. The 8360 48Y6C model requires configuration of <b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 10G transceivers/DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 48Y6C model do not support 1G transceivers. All other ports can individually autodetect the speed of the inserted transceiver. Intermittent issues seen with HPE Server NICs. See details in <a href="#">HPE Servers and Systems Support</a> .
Aruba 8400X Modules	JL687A	JL487A: Not Supported JL488A, JL489A:	JL487A 0.65m DAC not supported. The JL687A module requires

SFP28 (25G) DAC capable product name	SKU	Minimum software required	Comments
		10.04.2000 *844477-B21, *844480-B21: 10.06.0001	configuration of <b>interface groups</b> (groups of four ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.
Aruba 9300 Switch Series	Not supported		SFP28 DACs and AOCs are not supported for use through a QSA28 adapter. The QSA28 adapter is not supported for use on the 9300 32D model.
Aruba 9300S Switch Series	Not supported		9300S supports the QSA28 adapter, but 25G DACs are not supported thru the QSA28
Aruba 10000 48Y6C models	R8S96A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	JL487A, JL488A, JL489A, *844477-B21 and *844480-B21: 10.10.0002	The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (set speed back to 25G for the default). See the Hardware Guides for details.

## 25G SFP28 AOC (Active Optical Cable)



### Models, specifications, and compatibility

**Specifications for SFP28 25G active optical cables**

Product name (SKU)	Cable length	Data rate
Aruba 25G SFP28 to SFP28 3m AOC (R0M44A)	3 m (9.84 ft)	25 Gbps
Aruba 25G SFP28 to SFP28 7m AOC (R0M45A)	7 m (22.96 ft)	
Aruba 25G SFP28 to SFP28 15m AOC (R0Z21A)	15 m (49.21 ft)	

The following Active Optical Cable (AOC) products are offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.

**Specifications for HPE SFP28 split AOCs (from HPE server products)**

Product name (SKU)	Cable length	Data rate
HPE QSFP28 to 4x25G SFP28 7 m AOC (845420-B21) 25G ends support	7 m (22.9 ft)	100G port split to 4x 25 Gbps
HPE QSFP28 to 4x25G SFP28 15 m AOC (845424-B21) 25G ends support	15 m (49.2 ft)	

**Specifications for HPE SFP28 AOCs (from HPE Storage Products)**

Product name (SKU)	Cable length	Data rate
HPE 25GbE SFP28 to SFP28 3 m Smart AOC(Q9S67A) HPE 25GbE SFP28 to SFP28 5 m Smart AOC(Q9S68A) HPE 25GbE SFP28 to SFP28 10 m Smart AOC(Q9S69A) HPE 25GbE SFP28 to SFP28 15 m Smart AOC(Q9S70A)	See length in descriptions.	25 Gbps

**Compatibility for the SFP28 25G active optical cables**

\* HPE Server or Storage product. May not be available to Aruba resellers

SFP28 (25G) AOC capable product name	SKU	Minimum software required R0M44A, R0M45A, R0Z21A	Comments
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	R0M44A, R0M45A, R0Z21A: 10.14.0001  *845420-B21, *845424-B21: Not supported (both ends) (HPE Server part)	Supported in SFP56 and SFP28 ports: S3L75A: ports 25-28 S3L76A: ports 49-52 S3L77A: ports 49-50 (not 51-52)
<b>Aruba 6300M Switch Series</b>		R0M44A, R0M45A, R0Z21A: 10.13.000x *845420-B21, *845424-B21: Not supported (both ends) (HPE Server part)	For use in SFP56 or SFP28 uplink ports.  6300 R8S89A, R8S90A, R8S91A, R8S92A

SFP28 (25G) AOC capable product name	SKU	Minimum software required R0M44A, R0M45A, R0Z21A	Comments
			models require the <b>interface group &lt;speed&gt;</b> command to enable different speed products.
	S0E91A,S0X44A (4x100G models)	R0M44A, R0M45A, R0Z21A: 10.13,100x *845420-B21, *845424-B21: Not supported	S0E91 & S0X44A models: Only supported through a QSA28 adapter
<b>Aruba 8325 Switch Series</b>	JL635A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	R0M44A, R0M45A, R0Z21A: 10.03.0040 *845420-B21 (7 m split), *845424-B21 (15 m split): 10.10.0002 (HPE Server part)  *Q9S67A,*Q9S68A,*Q9S69A,*Q9S70A: 10.12.000x (HPE Storage part)	The 8325 requires configuration of <b>interface groups</b> (groups of 12 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). 845420-B21, 845424-B21 supported in 6300 select SKUs JL658A (uplink ports only), JL663A, JL762A for 10.08.0001 See the Hardware Guides for details.
8360 32Y4C models	JL717A/JL717C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C(v2) Power-to-Port model</li> </ul>	R0M44A, R0M45A, R0Z21A: 10.06.0001 *845420-B21 (7 m split), *845424-B21 (15 m split): 10.10.0002 (HPE Server part)  *Q9S67A,*Q9S68A,*Q9S69A,*Q9S70A: not supported (HPE Storage part)	The 8360 32Y4C model requires configuration of <b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 32Y4C model do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted transceiver. Not applicable to the 24XF (1G/10G) model. 845420-B21, 845424-B21 supported in 6300

SFP28 (25G) AOC capable product name	SKU	Minimum software required R0M44A, R0M45A, R0Z21A	Comments
			select SKUs JL658A (uplink ports only), JL663A, JL762A for 10.08.0001. See the Hardware Guides for details.
8360 16Y2C models	JL718A/JL718C(v2) displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul>	R0M44A, R0M45A, R0Z21A: 10.06.0001 *845420-B21(7 m split), *845424-B21(15 m split): 10.10.0002 (HPE Server part)  *Q9S67A,*Q9S68A,*Q9S69A,*Q9S70A: not supported (HPE Storage part)	
8360 48Y6C models	JL719C displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul>	R0M44A, R0M45A, R0Z21A: 10.09.0002 *845420-B21 (7 m split), *845424-B21 (15 m split): 10.10.0002 (HPE Server part)  *Q9S67A,*Q9S68A,*Q9S69A,*Q9S70A: not supported (HPE Storage part)	MACsec available on ports 1-4 10G or 25G speeds. The 8360 48Y6C model requires configuration of <b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 10G transceivers /DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 48Y6C model do not support 1G transceivers. All other ports can individually autodetect the speed of the inserted transceiver.
Aruba 8400X Modules	JL687A	R0M44A, R0M45A, R0Z21A, *845420-B21 (7 m split), *845424-B21 (15 m split): 10.10.0002 (HPE Server part)  *Q9S67A,*Q9S68A,*Q9S69A,*Q9S70A: not supported (HPE Storage part)	The JL687A module requires configuration of <b>interface groups</b> (groups of four ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). 845420-B21, 845424-B21 supported in 6300 select SKUs JL658A

SFP28 (25G) AOC capable product name	SKU	Minimum software required R0M44A, R0M45A, R0Z21A	Comments
			(uplink ports only), JL663A, JL762A for 10.08.0001 See the Hardware Guides for details.
<b>Aruba 9300 Switch Series</b>	Not supported		SFP28 DACs and AOCs are not supported for use through a QSA28 adapter. The QSA28 adapter is not supported for use on the 9300 32D model.
<b>9300S Switch Series</b>	Not supported		9300S supports the QSA28 adapter, but 25G AOCs are not supported through the QSA28.
Aruba 10000 48Y6C models	R8S96A displayed by CLI ( <b>show system</b> ) <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	R0M44A, R0M45A, R0Z21A: 10.10.0002 *845420-B21(7m Split), *845424-B21(15m Split): 10.10.0002 (HPE Server part)  *Q9S67A,*Q9S68A,*Q9S69A,*Q9S70A: not supported (HPE Storage part)	The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (set speed back to 25G for the default). See the Hardware Guides for details.

### SFP+ optical transceiver modules

In December 2017, Aruba introduced Revision D versions of 100M, 1G, and 10G transceivers. Revision D products are structured to be specific alternate vendors as sources for the SKU#. Earlier Revision A, B, or C product may have alternate vendors that we no longer actively ship, but remain as fully supported in earlier and current products.

Some switch products will be specifying Revision D or Revision E (as is the case for the 8325 requiring J9151E or later) transceivers for full support, while other products may support earlier (older) revision transceivers – and some with specific 4x4 part numbers (see [Identification of 4x4 part numbers](#) for information).

Refer to the Datasheet or QuickSpecs for the switch product for the current list of supported transceivers.



- Although a 10G SFP+ transceiver module is the same physical dimensions of a 1G SFP transceiver, a 10G transceiver will NOT operate in a 1G-only SFP port.
- Many, although not all, 10G SFP+ ports have support to use a 1G SFP transceiver (or even a 100Mbps FX SFP transceiver).  
See the QuickSpec for the Switch product and verify if the 1G or 100Mbps SFP transceiver is supported in the 10G SFP+ port.

### Models, specifications, and compatibility

SFP+ optical transceiver modules provide a transmission rate of 10.31 Gbps and use LC connectors. 10G BiDi transceivers always require paired sets: a -U must pair to a -D on the opposite end of the BiDi link, using a single fiber strand and a simplex LC connector.

The specifications for Revision D and E transceiver products are the same as the specified Revision A, B, C SKUs. Where support for a Revision A, B, or C transceiver existed, Revision D or E parts are also supported. Not all earlier revisions can be re-used on newer products: Check the tables below and compare the 4x4 number of the part to the list of supported 4x4 numbers. See [Identification of 4x4 part numbers](#) for more information.

**Specifications for SFP+ optical transceiver modules**

Product Name (SKU)	DOM - digital optical monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter (µm)	Bandwidth (MHz*km)	Transmission distance
HPE X132 10G SFP+ LC SR Transceiver (J9150A)  Aruba 10G SFP+ LC SR 300m MMF xcvr (J9150D)	Yes  J9150A/J9150D: (1990-4391, 1990-4635, 1990-4634, 1990-4175)	Single lane, 850 1x10G NRZ	MMF	50/125	4700 (OM4) 2000 (OM3) 500 (OM2) 400	400m (1312.34 ft) 300m (984.25 ft) 82m (269.03 ft) 66m (216.54 ft)
HPE ANW 10G SR SFP+ LC 400m OM4 C-xcvr (S2P30A)	S2P30A: (1990-4918, 1990-4916)			62.5/125	200 (OM1) 160	33m (108.27 ft) 26m (85.30 ft)
Aruba 10G I-Tmp SFP+ LC SR 300m MMF xcvr (JL782A)	JL782A: (1990-4767, 1990-4770)					
Aruba 10G SFP+ LC SR 300m MMF TAA xcvr (JL748A)	JL748A: (1990-4175, 1990-4776)					
HPE X132 10G SFP+ LC LRM Transceiver (J9152A)  Aruba 10G SFP+ LC LRM 220m MMF xcvr (J9152D)	Yes (1990-4485 1990-4801) See note below regarding MCP.	Single lane, 1310 1x10G NRZ	MMF	50/125	1500 500 (OM2) 400	220m (721.78 ft) 220m (721.78 ft) 100m (328.08 ft)
				62.5/125	200 (OM1) 160	220m (721.78 ft) 220m (721.78 ft)
			SMF	9/125	N/A	300m (987.25 ft)
HPE X132 10G SFP+ LC LR Transceiver (J9151A)  Aruba 10G SFP+ LC LR 10km SMF xcvr (J9151D)	Yes  J9151A/J9151D: (1990-4657, 1990-4694)	Single lane, 1310 1x10G NRZ	SMF	9/125	N/A	10km (6.21 miles)



Product Name (SKU)	DOM - digital optical monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter (µm)	Bandwidth (MHz*km)	Transmission distance
and J9151E)  HPE ANW 10G LR SFP+ LC 10km SMF C-xcvr (S2P31A)  Aruba 10G SFP+ LC LR 10km SMF TAA xcvr (JL749A)  Aruba 10G I-Tmp SFP+ LC LR 10km SMF xcvr (JL783A)	S2P31A: (1990-4919)  JL749A: (1990-4751, 1990-4752)  JL783A: (1990-4768, 1990-4769)					
Aruba 10G LC BiDi 40km-D 1330/1270 xcvr (R9X54A)	Yes (1990-4843)	TX:1330 RX:1270 1x10G NR	SMF (simplex LC)	9/125	N/A	40km (24.86 miles)
Aruba 10G LC BiDi 40km-U 1270/1330 xcvr (R9X55A)	Yes (1990-4842)	TX:1270 RX:1330 1x10G NRZ	SMF (simplex LC)	9/125	N/A	40km (24.86 miles)
HPE X132 10G SFP+ LC ER Transceiver (J9153A)  Aruba 10G SFP+ LC ER 40km SMF xcvr (J9153D)  HPE ANW 10G ER SFP+ LC 40km SMF C-xcvr (S2P32A)	Yes (1990-4365, 1990-4656)	Single lane, 1550 1x10G NRZ	SMF	9/125	N/A	40km (24.86 miles) on engineered link (less than 11.1dBm loss over the entire link). 30km on standard SMF links.



MCP note: J9152D 10G LRM (long leach multimode) with 4x4 numbers 1990-4485 or 1990-4801 are tuned so that they do not require a Mode Conditioning Patch (MCP) cable. Older J9152A with 4x4 numbers other than 1990-4485 or 1990-4801 may require an MCP when you use OM1 or OM2 fiber cables. Never use mode conditioning patch cables for OM3 or OM4 fiber types. For more information about mode conditioning patch cables, see related sections in the IEEE 802.3 standard.



10G LRM transceivers require an Electronic Dispersion Compensation (EDC) behind the SFP+ port to support 10G LRM technology. Switches with note "(or any type of 10G LRM technology)" cannot support any type of 10G LRM transceiver (even under Unsupported Transceiver mode).

Aruba high-temperature industrial transceivers (I-Tmp) will work in Aruba switches other than the 4100i, but they will be listed as unsupported in **show interface brief** outputs.

#### Optical specifications for SFP+ optical transceiver modules

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
HPE X132 10G SFP+ LC SR Transceiver (J9150A) Aruba 10G SFP+ LC SR 300m MMF xcvr (J9150D) HPE ANW 10G SR SFP+ LC 400m OM4 C-xcvr (S2P30A) Aruba 10G SFP+ LC SR 300m MMF TAA xcvr (JL748A) Aruba 10G I-Tmp SFP+ LC SR 300m MMF xcvr (JL782A)	Duplex LC (PC or UPC)	-7.3 to -1	-9.9 to +0.5
HPE X132 10G SFP+ LC LRM Transceiver (J9152A) Aruba 10G SFP+ LC LRM 220m MMF xcvr (J9152D)	Duplex LC (PC or UPC)	-6.5 to +0.5	-6.5 to +1.5
HPE X132 10G SFP+ LC LR Transceiver (J9151A) Aruba 10G SFP+ LC LR 10km SMF xcvr (J9151D/J9151E) HPE ANW 10G LR SFP+ LC 10km SMF C-xcvr (S2P31A) Aruba 10G SFP+ LC LR 10km SMF TAA xcvr (JL749A) Aruba 10G I-Tmp SFP+ LC LR 10km SMF xcvr (JL783A)	Duplex LC (PC or UPC)	-8.2 to +0.5	-14.4 to +0.5
Aruba 10G LC BiDi 40km-D 1330/1270 xcvr (R9X54A)	Simplex LC (PC or UPC)	0 to +5	-19 to -7 (use a 12dB attenuator for

Product name (SKU)	Connector	Optical parameters (dBm)	
		Transmit power	Receive power
Aruba 10G LC BiDi 40km-U 1270/1330 xcvr (R9X55A)			short SMF cables)
HPE X132 10G SFP+ LC ER Transceiver (J9153A) Aruba 10G SFP+ LC ER 40km SMF xcvr (J9153D) HPE ANW 10G ER SFP+ LC 40km SMF C-xcvr (S2P32A)	Duplex LC (PC or UPC)	-4.7 to +4	-15.8 to -1 (use 5dB attenuator for short SMF cables)

### Compatibility for the SFP+ optical transceiver module

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
2530 Switch Series	J9853A, J9854A, J9855A, J9856A	All	All	Unlisted models do not have SFP+ ports
2540 Switch Series	JL354A, JL355A, JL356A, JL357A	All (J9150A/J9150D and J9151A/J9151D/J9151E only) J9152A/J9152D (LRM) is not supported in any 2540 model	All	J9152A/J9152D (or any type of 10G LRM technology) is not supported in any 2540 model even under UT-mode
2910a Switch Series	J9008A	All	W.15.07.0002	Unlisted models do not have SFP+ ports
2920 Switch Series	J9726A, J9727A, J9728A, J9729A, J9836A	All		For use in an installed J9731A Aruba 2920 2-port 10GbE SFP+ Module
2930F Switch Series	JL253A, JL254A, JL255A, JL256A, JL258A, JL263A, JL264A, JL558A, JL559A	J9150A/J9150D and J9151A/J9151D/J9151E: All versions JL748A/JL749A (TAA xcvs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018 J9152A/J9152D (or any type of 10G LRM technology) is not supported in any 2930F model	All	Unlisted models do not have SFP+ ports. J9152A/J9152D (or any type of 10G LRM technology) is not supported in any 2930F model.
2930M Switch	JL319A, JL320A, JL321A, JL322A,	J9150A/J9150D, J9151A/J9151D/J9151E,	All	For use in an installed JL083A Aruba

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
Series	JL323A, JL324A	J9152A/J9152D:All versions JL748A/JL749A (TAA xcvs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018		3810M/2930M 4SFP+ MACsec Module
	R0M67A, R0M68A	J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D: WC.16.05.xxxx JL748A/JL749A (TAA xcvs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018	WC.16.05	
3500yl Switch Series	J8692A, J8693A, J9310A, J9311A	K.14.50 and later	K.15.02.0004 and later	For use in an installed J9312A 10GbE 2-port SFP+/2-port CX4 yl Module.
3800 Switch Series	J9575A, J9576A, J9573A, J9574A, J9584A	All	All	Unlisted models do not have SFP+ ports.
3810M Switch Series	JL071A, JL072A, JL073A, JL074A, JL076A	J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D:All versions JL748A/JL749A (TAA xcvs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018	All	For use in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module
	JL075A	J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D:All versions JL748A/JL749A (TAA xcvs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018	All	For use in the JL075A SFP+ ports or in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module
4100i Switch Series	JL817A, JL818A	J9150D, J9151D, J9153D: 10.08 (Commercial Temp) JL748A/JL749A (TAA xcvs): 10.08 (Commercial Temp)	J9153D: 10.08.0001 (Commercial Temp) No Aruba 10G ER	Temp warnings will trigger at lower temperatures (~50C) if Commercial Temp vs

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
		JL782A, JL783A: 10.08.0001(Industrial Temp)  S2P30A, S2P31A, S2P32A (C-Class): 10.13.1000  J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series (even under UT-mode)	Ind Temp xcvr available	Industrial Temp transceivers (~70C) are used. Commercial temp transceivers listed are enabled by 10.08.0001 but will be marked as "unsupported" because of non-compliant temp rating. All Third Party transceivers are treated as Commercial Temp, regardless of capability.
5400zl Switch Series	J9309A	K.14.39	K.15.02.0004	The J9309A 4-port SFP+ module supports only 10G transceivers. 10G ER (J9153A/D) transceivers are limited to a maximum of two transceivers per J9309A or J9538A modules when used in a 5400zl or 8200zl chassis.
	J9538A, J9548A, J9536A	K.15.02.0004	K.15.02.0004	
5400R Switch Series	J9538A, J9548A, J9536A	J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D:All versions JL748A/JL749A (TAA xcvrs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018	All	
	J9990A, J9993A	J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D:KB.15.17 JL748A/JL749A (TAA xcvrs): 16.08.0021 and 16.10.0007 S2P30A, S2P31A, S2P32A (C-Class): 16.11.0018	KB.15.17	
Aruba 6100 Switch Series	All models	10.06.0001 JL748A/JL749A (TAA transceivers): 10.06.0130 /10.07.0010	J9153D 10G ER not supported on the 6100 series	Only the listed 4x4 parts are fully supported J9150A/J9150D <ul style="list-style-type: none"> <li>▪ 1990-4391</li> </ul>

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
		<p>S2P30A, S2P31A, S2P32A (C-Class): 10.13.1000</p> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported in the 6100 series</p> <p>S2P30A, S2P31A(C-Class): 10.13.1010</p>	<p>S2P32A(C-Class): 10.13.1010</p>	<ul style="list-style-type: none"> <li>▪ 1990-4175</li> <li>▪ 1990-4635</li> <li>▪ 1990-4634</li> </ul> <p>J9151A/J9151D</p> <ul style="list-style-type: none"> <li>▪ 1990-4657</li> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>J9151E</p> <ul style="list-style-type: none"> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported on the 6100 Series</p>
6120 Blade Switch Series	516733-B21 (6120XG)	All	Not supported	498358-B21 (6120G/XG) has 1GB SFP and 10G XFP or CX4 ports and does not support these SFP+ transceivers.
6200yl Blade Switch Series	J8992A	K.14.50	K.15.02.0004	<p>J8992A fixed SFP ports are 1GB and do not support these SFP+ transceivers.</p> <p>For use in an installed J9312A 10GbE 2-port SFP+/2-port CX4 yl Module.</p>
<b>Aruba 6200F Switch Series</b>	<p>6200F models except 12p models R8Q72A/R8V13A (TAA)</p> <p>6200F 12p models R8Q72A/R8V13A (TAA)</p>	<p>J9150A/J9150D and J9151A/J9151D/J9151E: 10.04.1000</p> <p>JL748A/JL749A (TAA xcvs): 10.06.0130 / 10.07.0010</p> <p>S2P30A, S2P31A, S2P32A (C-Class): 10.13.1000</p> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series</p> <p>J9150A/J9150D and J9151A/J9151D/J9151E, JL748A/JL749A (TAA xcvs):</p>	<p>10.04.1000</p> <p>Only the listed 4x4 parts are fully supported</p> <p>J9153A/J9153D</p> <ul style="list-style-type: none"> <li>▪ 1990-4365</li> <li>▪ 1990-4656</li> </ul> <p>10.11.1005</p> <p>Same for the 10G</p>	<p>Only the listed 4x4 parts are fully supported</p> <p>J9150A/J9150D</p> <ul style="list-style-type: none"> <li>▪ 1990-4391</li> <li>▪ 1990-4175</li> <li>▪ 1990-4635</li> <li>▪ 1990-4634</li> </ul> <p>J9151A/J9151D</p> <ul style="list-style-type: none"> <li>▪ 1990-4657</li> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>J9151E</p> <ul style="list-style-type: none"> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>J9152A/J9152D (or any type of 10G LRM</p>

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
<b>6200F Switch Series (Rev B)</b>	JL724B through JL728B, S0M81A through S0M90A	10.11.1005	ER optic	technology) is not supported on the 6200F revision A and B Series
		J9150A/J9150D and J9151A/J9151D/J9151E, JL748A/JL749A (TAA xcvs): 10.13.000x	Same for the 10G ER optic	
		J9150A/J9150D and J9151A/J9151D/J9151E, JL748A/JL749A (TAA xcvs) , R9X54A/R9X55A(40km BiDi): 10.13.000x	Same for the 10G ER optic	
		S2P30A, S2P31A, (C-Class): 10.13.1010	S2P32A (C-Class): 10.13.1010	
<b>Aruba 6200M Switch Series</b>	All 6200M models	10.11.1005 (support for 10G LRM on uplinks)  R9X54A/R9X55A (40km BiDi): 10.12.1000  S2P30A, S2P31A (C-Class): 10.13.1010	10.11.1005   S2P32A (C-Class): 10.13.1010	6200M models support all of the above 10G products in addition to: J9152D 10G LRM <ul style="list-style-type: none"> <li>1990-4485</li> <li>1990-4801</li> </ul>
<b>Aruba 6300 Switch Series</b>	All models (M and F) except JL762A	J9150A/J9150D and J9151A/J9151D/J9151E: 10.04.1000 Except JL762A: 10.04.3000	10.04.0001 J9153A/J9153D <ul style="list-style-type: none"> <li>1990-4365</li> <li>1990-4656</li> </ul>	J9150A/J9150D <ul style="list-style-type: none"> <li>1990-4391</li> <li>1990-4175</li> <li>1990-4635</li> <li>1990-4634</li> </ul> JL748A <ul style="list-style-type: none"> <li>1990-4175</li> <li>1990-4776</li> </ul> J9151A/J9151D <ul style="list-style-type: none"> <li>1990-4657</li> <li>1990-4727</li> <li>1990-4694</li> </ul> J9151E <ul style="list-style-type: none"> <li>1990-4727</li> <li>1990-4694</li> </ul> JL749A 4x4: <ul style="list-style-type: none"> <li>1990-4751</li> <li>1990-4752</li> </ul> J9152D (LRM)
		JL748A/JL749A (TAA xcvs): 10.06.0130 / 10.07.0005		
	S2P30A, S2P31A, S2P32A (C-Class): 10.13.1000			
R8S89A, R8S90A, R8S91A, R8S92A	J9150A/J9150D, J9151A/J9151D, J9151E, JL748A/JL749A (TAA xcvs): 10.10.0002			
	S2P30A, S2P31A, S2P32A (C-Class): 10.13.1000			
S0E91A/S0X44A	J9150A/J9150D,		S2P32A (C-Class):	

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
		<p>J9151A/J9151D, J9151E, JL748A/JL749A (TAA xcvsrs), S2P30A, S2P31A, S2P32A C-Class): 10.13.1000</p> <p>J9152D are only supported in select ports on 6300M models R8S91A and R8S92A. (Other models in this series do NOT support LRM technology, even in UT-mode).</p>	10.13.1010	<ul style="list-style-type: none"> <li>■ 1990-4485</li> <li>■ 1990-4801</li> </ul> <p>6300M models (R8S91A supports LRM in ports 51 &amp; 52) and (R8S92A supports LRM in ports 1-24) and only J9152D (earlier J9152A are not supported). Other 6300M models not noted above do NOT support J9152A/J9152D (or any type of 10G LRM technology) even in UT-mode.</p> <p>R8S89A, R8S90A and R8S92A require interface-group {n} speed 10 applicable to the last 2 ports to use 10G (the ports default to 25G use-case). This is different than other 6300 models that auto-detect the inserted transceiver. This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. ZTP is OK on these models if 25G optics are used. R8S91A last 2 ports are 10G (LRM capable) and can use 10G optics without issue for ZTP.</p>
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	<p>J9150A/J9150D and J9151A/J9151D/J9151E, JL748A/JL749A (TAA xcvsrs), S2P30A, S2P31A(C - Class): 10.14.0001</p> <p>J9152D: 10.14.0001(only S3L77A 6300L model)</p> <p>R9X54A/R9X55A (40km BiDi): Not supported</p>	<p>All models, all ports</p> <p>J9153D: 10.14.0001</p>	<p>S3L75A: Ports 25-28 S3L76A: Ports 49-52 S3L77A: Ports 49-50 (not 51-52)</p> <p>S3L77A: Ports 51-52 add support for J9152D (10G LRM)</p> <ul style="list-style-type: none"> <li>■ 1990-4485</li> <li>■ 1990-4801</li> </ul>
Aruba	R0X39B, R0X40B	J9150A/J9150D and	10.04.1000	R0X38A/R0X39A/R0X40A



SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
6400 Modules	R0X41A, R0X42A, R0X43A	J9151A/J9151D/J9151E: 10.04.1000 JL748A/JL749A (TAA xcvrs): 10.06.0140 and 10.07.0005  J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series.		(revision A) are no longer supported for use in the 6400 modules.  J9150A/J9150D <ul style="list-style-type: none"> <li>1990-4391</li> <li>1990-4175</li> <li>1990-4635</li> <li>1990-4634</li> </ul> JL748A <ul style="list-style-type: none"> <li>1990-4175</li> <li>1990-4776</li> </ul> J9151A/J9151D <ul style="list-style-type: none"> <li>1990-4657</li> <li>1990-4727</li> <li>1990-4694</li> </ul> J9151E <ul style="list-style-type: none"> <li>1990-4727</li> <li>1990-4694</li> </ul>
	R0X39C/R0X40C R0X41C, R0X42C, R0X43C	10.09.1000	10.09.1000	JL749A <ul style="list-style-type: none"> <li>1990-4751</li> <li>1990-4752</li> </ul>
	R0X44A (48p 25G v1)	J9150A/J9150D and J9151A/J9151D/J9151E: 10.04.2000 JL748A/JL749A (TAA xcvrs): 10.06.0140 and 10.07.0005  J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series	10.04.2000 J9153A/J9153D <ul style="list-style-type: none"> <li>1990-4365</li> <li>1990-4656</li> </ul>	J9152A/J9152D (or any type of 10G LRM technology) is not supported in any of the 6400 modules.  R0X44A auto-detects the inserted type of transceiver; it does NOT require any interface groups like the 8325.
	R0X44C (48p 25G v2)	10.09.1000 No support for LRM technology R9X54A/R9X55A (10G 40km BiDi): 10.11.0001	S2P30A, S2P31A (C-Class): 10.13.1010	S2P32A (C-Class): 10.13.1010
	S1T83A S0E48A (32p 25G)	10.13.1000 No support for LRM technology R9X54A/R9X55A (10G 40km BiDi): 10.13.1000	10.13.1000	Interface groups must be enabled to change to 10G or 1G capability

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
	4p 100G)	S2P30A, S2P31A(C-Class): 10.13.1010	S2P32A(C-Class): 10.13.1010	(DACs or Optics). When set, only 10G optics can be used in the selected port group.  S0E48A port groups are as follows: Group 1 = 1-8 Group 2 = 9-16 Group 3 = 17-24 Group 4 = 25-32
6600 Switch Series	J9264A, J9265A	K.14.03	K.15.02.0004	
	J9452A	K.14.24	K.15.02.0004	
8100 Switch Series	All models	J9150D, J9151E, (SR/LR) JL748A, JL749A (TAA xcvrs): 10.12.000x  S2P30A, S2P31A(C-Class): 10.13.1010  J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series  QSFP28 ports can support 10G SR and LR optical products through a QSA28	J9153E (ER): Not supported  S2P32A (C-Class ER): Not supported	J9152A/J9152D (or any type of 10G LRM technology) is not supported on this series (even under UT-mode)
8200zl Switch Series	J9309A	K.14.39	K.15.02.0004	The J9309A four-port SFP+ module only supports 10G transceivers.
	J9538A, J9548A, J9536A	K.15.02.0004	K.15.02.0004	10G ER (J9153A/D) transceivers are limited to a maximum of two transceivers per J9309A or J9538A modules when used in a 5400zl or 8200zl chassis.
Aruba 8320 48p 10G SFP/SFP+ and 6p	JL479A	J9150A/J9150D and J9151A/J9151D/J9151E: 10.03.0001 JL748A/JL749A (TAA xcvrs): 10.06.0140 and	All	Only the listed 4x4 parts are fully supported. J9150A/J9150D <ul style="list-style-type: none"> <li>■ 1990-4391</li> </ul>

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
40G QSFP+ Switch		<p>10.07.0005</p> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series</p> <p>S2P30A, S2P31A (C-Class): 10.13.1010</p> <p>QSFP28 ports can support these optical products through a QSA28</p>	<p>S2P32A (C-Class): 10.13.1010</p>	<ul style="list-style-type: none"> <li>▪ 1990-4175</li> <li>▪ 1990-4635</li> <li>▪ 1990-4634</li> </ul> <p>JL748A</p> <ul style="list-style-type: none"> <li>▪ 1990-4175</li> <li>▪ 1990-4776</li> </ul> <p>J9151A/J9151D</p> <ul style="list-style-type: none"> <li>▪ 1990-4657</li> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>J9151E</p> <ul style="list-style-type: none"> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>JL749A</p> <ul style="list-style-type: none"> <li>▪ 1990-4751</li> <li>▪ 1990-4752</li> </ul> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported on the 8320 Series.</p>
Aruba 8325 48Y8C Switch	<p>JL635A displayed by CLI (show system)</p> <p>JL624A - Portto-Power model (FB)</p> <p>JL625A - Power-to-Port model (BF)</p>	<p>J9150A/J9150D and J9151A/J9151D/J9151E: 10.03.0030 JL748A/JL749A (TAA xcvs): 10.06.0140 and 10.07.0005</p> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series</p> <p>QSFP28 ports can support these optical products through a QSA28</p> <p>S2P30A, S2P31A(C-Class): 10.13.1010</p>	<p>10.03.0030</p> <p>Only the listed 4x4 parts are fully supported</p> <p>J9153A/J9153D</p> <ul style="list-style-type: none"> <li>▪ 1990-4365</li> <li>▪ 1990-4656</li> </ul> <p>S2P32A(C-Class): 10.13.1010</p>	<p>Only the listed 4x4 parts are fully supported.</p> <p>J9150A/J9150D</p> <ul style="list-style-type: none"> <li>▪ 1990-4391</li> <li>▪ 1990-4175</li> <li>▪ 1990-4635</li> <li>▪ 1990-4634</li> </ul> <p>JL748A 4x4:</p> <ul style="list-style-type: none"> <li>▪ 1990-4175</li> <li>▪ 1990-4776</li> </ul> <p>8325 is only compatible with J9151E or later. Do not attempt to use J9151D or earlier.</p> <p>J9151E</p> <ul style="list-style-type: none"> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>JL749A 4x4:</p> <ul style="list-style-type: none"> <li>▪ 1990-4751</li> <li>▪ 1990-4752</li> </ul> <p>J9152A/J9152D (or any type of 10G LRM technology) is not</p>

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
				supported in the 8325 switches even under UT-mode. The 8325 requires configuration of <b>interface groups</b> (groups of 12 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed).  See the <a href="#">Hardware Guides</a> for details.
Aruba 8360 Switch Series	<p>8360 32Y4C models JL717A/JL717C(v2) displayed by CLI (<code>show system</code>)</p> <ul style="list-style-type: none"> <li>▪ JL700A/JL700C (v2) Port-to-Power model</li> <li>▪ JL701A/JL701C (v2) Power-to-Port model</li> </ul> <p>8360 16Y2C models JL718A/JL718C(v2) displayed by CLI (<code>show system</code>)</p> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C (v2) Port-to-Power model</li> <li>▪ JL703A/JL703C (v2) Power-to-Port model</li> </ul> <p>8360 24XF2C models JL722A displayed by CLI (<code>show system</code>)</p> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C (v2) Port-to-Power model</li> <li>▪ JL711A/JL711C</li> </ul>	<p>10.06.0001 JL748A/JL749A (TAA xcvr): 10.06.0140 and 10.07.0005</p> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series</p> <p>48Y6C models: 10.09.0002</p> <p>QSFP28 ports can support these optical products through a QSA28</p> <p>S2P30A, S2P31A(C-Class): 10.13.1010</p>	<p>10.06.0001 Only the listed 4x4 parts are fully supported J9153A/J9153D</p> <ul style="list-style-type: none"> <li>▪ 1990-4365</li> <li>▪ 1990-4656</li> </ul> <p>48Y6C models: 10.09.0002</p> <p>S2P32A(C-Class): 10.13.1010</p>	<p>Only the listed 4x4 parts are fully supported J9150A/J9150D</p> <ul style="list-style-type: none"> <li>▪ 1990-4391</li> <li>▪ 1990-4175</li> <li>▪ 1990-4635</li> <li>▪ 1990-4634</li> </ul> <p>JL748A</p> <ul style="list-style-type: none"> <li>▪ 1990-4175</li> <li>▪ 1990-4776</li> </ul> <p>J9151A/J9151D</p> <ul style="list-style-type: none"> <li>▪ 1990-4657</li> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>J9151E</p> <ul style="list-style-type: none"> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> <p>JL749A</p> <ul style="list-style-type: none"> <li>▪ 1990-4751</li> <li>▪ 1990-4752</li> </ul> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported on this series. The 8360 32Y4C model requires configuration of <b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 10G transceivers / DACs in the SFP28 ports</p>


SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
	(v2) Power-to-Port model 8360 48Y6C models L719C displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>■ JL704C(v2) - Port-to-Power model (FB)</li> <li>■ JL705C(v2) - Power-to-Port model (BF)</li> </ul>			(Interface Groups default to 25G speed). Ports 1-4 on the 8360 32Y4C models do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted xcvr. Not applicable to the 24XF (1G/10G) model. See the <a href="#">Hardware Guides</a> for details.
Aruba 8400X modules	JL363A JL687A	<p>For JL363A 10G module: J9150A/J9150D and J9151A/J9151D/J9151E, J9152A/J9152D: 10.00.0001</p> <p>JL748A/JL749A (TAA xcvrs): 10.06.0140 and 10.07.0005</p> <p>10G LRM technology is supported only on the JL363A module</p> <p>For JL687A 25G module: J9150A/J9150D and J9151A/J9151D/J9151E: 10.04.2000</p> <p>JL748A/JL749A (TAA xcvrs): 10.07.0005</p> <p>J9152A/J9152D (or any type of 10G LRM technology) is not supported in the JL687A module.</p> <p>S2P30A, S2P31A (C-Class): 10.13.1010</p>	JL363A: All JL687A: 10.04.2000  S2P32A (C-Class): 10.13.1010	<p>Only the listed 4x4 parts are fully supported.</p> <p>J9150A/J9150D</p> <ul style="list-style-type: none"> <li>■ 1990-4391</li> <li>■ 1990-4175</li> <li>■ 1990-4635</li> <li>■ 1990-4634</li> </ul> <p>JL748A</p> <ul style="list-style-type: none"> <li>■ 1990-4175</li> <li>■ 1990-4776</li> </ul> <p>J9151E</p> <ul style="list-style-type: none"> <li>■ 1990-4727</li> <li>■ 1990-4694</li> </ul> <p>JL749A</p> <ul style="list-style-type: none"> <li>■ 1990-4751</li> <li>■ 1990-4752</li> </ul> <p>JL363A module supports J9152A/J9152D</p> <ul style="list-style-type: none"> <li>■ 1990-4485</li> <li>■ 1990-4801</li> </ul> <p>JL687A module does NOT support J9152A/J9152D (or any type of 10G LRM technology). The JL687A module requires configuration of <b>interface groups</b> (groups of four ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups</p>

SFP+ (10G) capable product name	SKU	Minimum software required		Comments
		10G-SR, LR, LRM (J9150A/J9150D, J9151A/J9151D/J9151E, J9152A/J9152D)	10G-ER (J9153A/J9153D)	
				default to 25G speed). See the <a href="#">Hardware Guides</a> for details.
Aruba 9300 Switch Series	Not supported			10G xcvs and DACs are not supported for use through a QSA28 adapter. The QSA28 adapter is not supported at this time for use on the 9300 32D model.
Aruba 10000 48Y6C models	R8S96A displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	All 10000 models: J9150D: 10.10.0002 J9151E, JL748A(TAA): 10.10.0002  J9152A/J9152D (or any type of 10G LRM technology) is not supported in this series  S2P30A, S2P31A(C-Class): 10.13.1010	J9153D:10.10.0002    S2P32A(C-Class): 10.13.1010	Only the listed 4x4 parts are fully supported J9150A/J9150D <ul style="list-style-type: none"> <li>▪ 1990-4391</li> <li>▪ 1990-4175</li> <li>▪ 1990-4635</li> <li>▪ 1990-4634</li> </ul> J9151D is not supported: J9151E: <ul style="list-style-type: none"> <li>▪ 1990-4727</li> <li>▪ 1990-4694</li> </ul> The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (set speed to 25G for the default). See the <a href="#">Hardware Guides</a> for details.

\*J9152D 10G LRM with part numbers 1990-4485 and 1990-4801 are tuned so that it does not require the use of a mode conditioning patch (MCP) cable. Using an MCP with a J9152D will reduce the light levels and may trigger an "Rx power low" alarm. Older J9152A with part numbers other than 1990-4485 or 1990-4801 may require an MCP when you use OM1 or OM2 fiber cables. Never use mode-conditioning patch cables for OM3 or OM4 fiber types. For more information about mode conditioning patch cables, see related parts in the IEEE 802.3 standard.



# 10G SFP+ copper transceiver modules

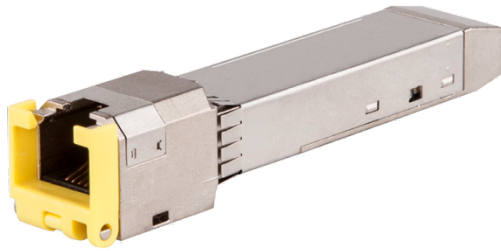

## Models, specifications, and compatibility



The 10GBASE-T Transceiver (JL563A/JL563B) are NOT supported for use through a QSA28 adapter (see [QSFP28 to SFP28 adapter support](#))



JL563A/JL563B only operates at 10G speed (does not auto-negotiate to 1G).

### Specifications for SFP+ copper transceiver modules

Product name (SKU)	Transmission distance	Data rate	Cable type	Connector type
Aruba 10GBASE-T SFP+ RJ45 30m Cat6A xcvr (JL563A/JL563B)	30 m (98.43 ft)	10G	STP Cat6A**	RJ-45

\*\*See [Transmission distance](#)

### Compatibility for SFP+ copper transceiver modules

SFP+ (10G) copper capable product name	SKU	Minimum software required (JL563A/JL563B)	Comments
Aruba 4100i Switch Series	JL817A, JL818A	Not supported	Not supported
Aruba 6100 Switch Series	All models	Not supported	Not supported
Aruba 6200 Switch Series	All models	10.04.1000	JL563A/JL563B does not support flow control and only operates at 10G speed (does not auto-negotiate to 1G)

SFP+ (10G) copper capable product name	SKU	Minimum software required (JL563A/ JL563B)	Comments
Aruba 6300 Switch Series	All models M and F	10.04.0001	JL563A/JL563B can be used in all SFP+ or SFP56 ports; no quantity limit.  JL563A/JL563B does not support flow control and only operates at 10G speed (does not auto-negotiate to 1G).
	R8S89A, R8S90A, R8S91A, R8S92A	10.10.0002	R8S89A, R8S90A and R8S92A require <b>interface-group {n} speed 10</b> applicable to the last 2 ports to use 10G (the ports default to 25G use-case). This is different than other 6300 models that auto-detect the inserted transceiver. This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. (ZTP is OK on these models if 25G optics are used, 25G is the default). R8S91A last 2 ports are 10G (LRM capable) and can use 10G optics without issue for ZTP (10G is the default for ports 51 & 52).
	S0E91A/S0X44A (100G models)	JL563B is not supported for use through a QSA28adapter	
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	10.14.0001	S3L75A, S3L76A require the <b>interface-group {n} speed 10</b> command applicable to the last 2 ports to use 10G (the ports default to 25G usecase). This is different than other 6300 models that auto-detect the inserted transceiver. This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. (ZTP is OK on these models if 25G optics are used, 25G is the default).  S3L77A last 2 ports are 10G (LRM capable) and can use 10G optics without issue for ZTP (10G is the default for ports 51 & 52).
Aruba 6400 Modules	R0X39B, R0X40B, R0X41A, R0X42A, R0X43A	10.04.1000	R0X39A/R0X40A (revision A) are no longer supported for use in the 6400 series JL563A/JL563B can be used in all SFP+, SFP28, or SFP56 ports; no quantity limit.
	R0X39C, R0X40C, R0X41C, R0X42C, R0X43C	10.09.1000	JL563A/JL563B does not support flow control and only operates at 10G speed (does not auto-negotiate to 1G).



SFP+ (10G) copper capable product name	SKU	Minimum software required (JL563A/ JL563B)	Comments
	R0X44A R0X44C	10.04.2000 10.09.1000	R0X44A auto-detects the inserted type of transceiver; it does not require any interface groups.  R0X44C requires interface groups to select speed.
	S1T83A/S0E48A	10.13.1000	S0E48A 25G module defaults to use 25G products. Interface groups must be enabled to change to 10G or 1G capability (DACs or Optics). When set, only 10G optics can be used in the selected port group.  S0E48A port groups are as follows: Group 1 = 1-8 Group 2 = 9-16 Group 3 = 17-24 Group 4 = 25-32
8100 Switch Series	All models	10.12.000x	JL563B is not supported for use through a QSA28 adapter
Aruba 8320 48p 10G SFP/SFP+ and 6p 40G QSFP+ Switch	JL479A	10.01.0011	JL563A/JL563B does not support flow control and only operates at 10G speed (does not auto-negotiate to 1G).
	In QSFP+ ports	JL563B is not supported for use through a QSA28 adapter	It is only supported in ports 1–12. Use in any other port generates an incompatible interface error (meaning the port does not support the use of this transceiver); move to a supported port. A maximum of 12 JL563A/JL563B transceivers can be used in a switch.
Aruba 8325 48Y8C	JL635A displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul> In QSFP+ ports	10.03.0030  JL563B is not supported for use through a QSA28 adapter	JL563A/JL563B does not support flow control and only operates at 10G speed (does not auto-negotiate to 1G). A maximum of 12 JL563A/JL563B transceivers can be used in a switch. It is only supported in the top two rows, ports 1 - 17. It is disallowed in ports 3, 6, 9, 12, and 15. Use in any other port generates an incompatible interface error (meaning the port does not support the use of this transceiver); move to a supported port. The 8325 requires configuration of

SFP+ (10G) copper capable product name	SKU	Minimum software required (JL563A/ JL563B)	Comments
			interface groups (groups of 12 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (Interface groups default to 25G speed). Open ports can use other optics (1G/10G or 25G depending on the Interface group setting). See the Hardware Guides for details.
Aruba 8360 Switch Series	<p>8360 32Y4C models JL717A/JL717C(v2) displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C(v2) Power-to-Port model</li> </ul> <p>8360 16Y2C models JL718A/JL718C(v2) displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) 3A Power-to-Port model</li> </ul> <p>8360 24XF2C models JL722A/JL722C(v2) displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711Power-to-Port model</li> </ul> <p>8360 48Y6C models JL719C displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul> <p>In QSFP+ ports</p>	<p>JL7117A/JL717C (v2) , JL718A/JL718C(v2) , JL722A/JL722C(v2) : 10.06.0001 JL719C: 10.09.0002</p> <p>JL563B is not supported for use through a QSA28 adapter</p>	<p>JL563A/JL563B does not support flow control and only operates at 10G speed (does not auto-negotiate to 1G). JL563A/JL563B transceivers can be used in all SFP or SFP28 ports in the 8360 switch (unlike the 8320 &amp; 8325). The 8360 32Y4C and 48Y6C models require configuration of "interface groups" only for ports 1-4 (as group #1) to enable the use of 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 32Y4C and 48Y6C models do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted xcvr. Not applicable to the 24XF (1G/10G) model. See the Hardware Guides for details.</p>
Aruba 8400X Modules	JL363A JL687A	10.00.0018 10.04.2000	JL563A/JL563B does not support 1G operation; only 10G. It is only supported in ports 1 - 12. A maximum of 12 JL563A/JL563B transceivers can be used in the JL363A module. The JL687A 32p 25G module can support the use of the JL563A/JL563B transceiver in all 32 ports. The JL687A module requires

SFP+ (10G) copper capable product name	SKU	Minimum software required (JL563A/ JL563B)	Comments
			configuration of <b>interface groups</b> (groups of 4 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.
Aruba 9300 Switch Series	Not supported		10G xcvr and DACs are not supported for use through a QSA28 adapter. The QSA28 adapter is not supported for use on the 9300 32D model at this time.
Aruba 10000 48Y6C models	R8S96A displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>■ R8P13A - 48Y6C FB bundle</li> <li>■ R8P14A - 48Y6C BF bundle</li> </ul>	All 10000 models: JL563A is locked out of being used in this series JL563B: 10.10.0002	The JL563A (10GBase-T, A-Revision) transceiver is locked out of use in this series (even with UT-mode). JL563B (B-revision) is supported in all SFP ports. The 10000 Switch Series requires configuration of <b>interface groups</b> (groups of 4 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports. (Interface Groups default to 25G.)

## SFP+ DAC cables



Direct Attach over Copper (DAC) cables have a minimum bend radius of typically 4x the diameter of the cable (approximately a 1" bend radius). Handle DAC cables carefully to ensure that you do not crimp or bend the cable beyond a 1" radius; otherwise, you risk damaging the cable.

Aruba and other HPE DAC cables are passive devices. If your deployment calls for Active DACs, these are not compatible. If an Active DAC is required, an alternative is to use a 10G SR transceiver at both ends with the appropriate fiber cable between them.

Where support for a Revision A, B, or C transceiver existed, Revision D or E parts are also supported. Not all earlier revisions can be re-used on newer product: Check the tables below and compare the 4x4 number of the part to the list of supported 4x4 numbers. See [Identification of 4x4 part numbers](#) for more information.

### Models, specifications, and compatibility

The specifications for Revision D transceiver products are the same as the specified Revision A, B, and C SKUs.

#### Specifications for SFP+ DACs

Product name (SKU)	Cable length	Data rate
HPE X242 10G SFP+ to SFP+ 1m DAC Cable (J9281B) Aruba 10G SFP+ to SFP+ 1m DAC Cable (J9281D)	1 m (3.28 ft)	10 Gbps
HPE X242 10G SFP+ to SFP+ 3m DAC Cable (J9283B) Aruba 10G SFP+ to SFP+ 3m DAC Cable (J9283D)	3 m (9.84 ft)	
HPE X242 10G SFP+ to SFP+ 7m DAC Cable (J9285B) Aruba 10G SFP+ to SFP+ 7m DAC Cable (J9285D)	7 m (22.97 ft)	



\* 7m 10G DACs are not supported on CX series (and are only supported on select AOS-Switch series). 10G 7m DACs require a PHY behind the SFP+ port to support >5m DAC technology. Switches with a note "or any type of 7m DAC is not supported" cannot support any type of 10G 7m DAC (even under Unsupported Transceiver mode). 5m DACs may work with Allow-Unsupported-Transceiver enabled.

The following DAC cables are offered by HPE Servers and Systems and ordered using the specified part number (these cables may not be available to order for Aruba-only partners). Refer to the [HPE Compute transceiver and cable hardware matrix product availability matrix](#) at hpe.com.

**Specifications for HPE SFP+ DACs (from HPE Server Products)**

Product name (SKU)	Cable length	Data rate
HPE BLc 10G SFP+ SFP+ 3m DAC Cable (487655-B21)	3m (9.84 ft)	10 Gbps
HPE BLc 10G SFP+ SFP+ 5m DAC Cable (537963-B21)	5m (16.40 ft)	

**(AOS-Switch) Compatibility for the SFP+ DACs**

SFP+ (10G) DAC capable product name	SKU	Minimum software required (J9281B/J9281D, J9283B/J9283D, J9285B/J9285D)	Comments
2530 Switch Series	J9853A, J9854A, J9855A, J9856A	All	Unlisted models do not have SFP+ ports.
2540 Switch Series	JL354A, JL355A, JL356A, JL357A	All (J9281B/J9281D and J9283B/J9283D only. See comments for exception)	J9285B/J9285D or any type of 7m DAC is not supported in any of these series. For more information, see <a href="#">Unsupported transceiver mode</a>
2910al Switch Series	J9145A, J9146A, J9147A, J9148A	W.14.28	For use in the J9008A 2-port 10GbE SFP+ al module.
2920 Switch Series	J9726A, J9727A, J9728A, J9729A, J9836A	All	The SFP ports on the models listed do not support these 10G SFP+ cables. For use in an installed J9731A Aruba 2920 2-port 10GbE SFP+ .
2930F Switch Series	JL253A, JL254A, JL255A, JL256A, JL258A, JL263A, JL264A, JL558A, JL559A	All (J9281B/J9281D and J9283B/J9283D only. See comment for exception)	Unlisted models do not have 10G SFP+ports. J9285B/J9285D or any type of 7m DAC is not supported in any of these series.
2930M Switch Series	JL319A, JL320A, JL321A, JL322A, JL323A, JL324A	All	For use in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module J9285B/9285D (7m DAC) is supported in all 2930M models.
3500yl Switch Series	J8692A, J8693A, J9310A, J9311A	K.14.50	For use in an installed J9312A 10GbE 2-port SFP+/2-port CX4 yl Module.

SFP+ (10G) DAC capable product name	SKU	Minimum software required (J9281B/J9281D, J9283B/J9283D, J9285B/J9285D)	Comments
3800 Switch Series	J9575A, J9576A, J9573A, J9574A, J9584A	All	Unlisted models not do not have SFP+ ports.
3810M Switch Series	JL071A, JL072A, JL073A, JL074A, JL076A	All	For use in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module.
	JL075A	All	For use in the JL075A SFP+ ports or used in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module.
5400zl Switch Series	J9309A	K.14.39	The J9309A 4-port SFP+ module only supports 10G transceivers.
	J9538A, J9548A, J9536A	K.15.02.0004	
5400R Switch Series	J9538A, J9548A, J9536A	All	
	J9990A, J9993A	KB.15.17	
6120 Blade Switch Series	516733-B21	All	
6200yl Switch Series	J8992A	K.14.50	J8992A fixed SFP ports are 1GB and do not support these SFP+ copper cables. For use in an installed J9312A 10GbE 2-port SFP+/2-port CX4 yl Module.
6600 Switch Series	J9264A, J9265A, J9452A	K.14.32	
8200zl Switch Series	J9309A	K.14.39	The J9309A 4-port SFP+ module only supports 10G transceivers.
	J9538A, J9548A, J9536A	K.15.02.0004	

**(AOS-CX) Compatibility for the SFP+ DACs (and specifics for HPE Server cables)**

SFP+ (10G) copper capable product name	SKU	Minimum software required (J9281D, J9283D, J9285D, 487655-B21, 537963-B21)	Comments
Aruba 4100i Switch Series	JL817A, JL818A	J9281D, J9283D: Not supported (may be enabled via UT-mode) *487655-B21, *537963-B21: Not supported	J9285D (7 m) Not Supported nor any type of 7m DAC. High Temp warnings will trigger at lower temperatures (~50C)if Commercial Temp vs Industrial Temp transceivers (~70C) are used. All Third Party transceivers are treated as Commercial Temp, regardless of capability. No Industrial Temp 10G DACs available
Aruba 6100 Switch Series	All models	J9281B/J9281D, J9283B/J9283D (see comment for exception): 10.11.1000  *487655-B21 and *537963-B21: not supported	Only the listed 4x4 parts are fully supported: J9281B/J9281D <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> J9283B/J9283D <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> J9285B/J9285D or any type of 7m DAC technology is not supported in any of these series. See <a href="#">Unsupported Transceiver Mode</a> .
Aruba 6200 Switch Series	All models with 10Gb SFP+ ports	J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.04.1000  *487655-B21 and *537963-B21: Not supported	Only the listed 4x4 parts are fully supported: J9281B/J9281D <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> J9283B/J9283D <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> J9285B/J9285D or any type of 7m DAC is not supported any 6200 model.
Aruba 6300 Switch Series	All models M and F  R8S89A, R8S90A,	J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.04.0001  *487655-B21and *537963-B21: 10.08.0001 for 6300 select SKUs JL658A (all ports), JL663A, JL762A	Only the listed 4x4 parts are fully supported J9281B/J9281D <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> J9283B/J9283D <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> </ul>

SFP+ (10G) copper capable product name	SKU	Minimum software required (J9281D, J9283D, J9285D, 487655-B21, 537963-B21)	Comments
	R8S91A, R8S92A	J9281B/J9281D and J9283B/J9283D, *487655-B21 and *537963-B21: 10.10.0002	<ul style="list-style-type: none"> <li>■ 8121-1798</li> </ul> <p>J9285B/J9285D or any type of 7m DAC is not supported in any 6300 model.</p> <p>R8S89A, R8S90A and R8S92A require <b>interface-group {n} speed 10</b> applicable to the last 2 ports to use 10G (the ports default to 25G use-case). This is different than other 6300 models that auto-detect the inserted transceiver. This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. ZTP is OK on these models if 25G optics are used, 25G is the default.</p> <p>R8S91A last 2 ports are 10G (capable) and can use 10G optics without issue for ZTP (10G is the default for ports 51 &amp; 52).</p>
<b>Aruba 6300L Switch Series</b>	S3L75A, S3L76A, S3L77A	<p>J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.14.0001</p> <p>*487655-B21 and *537963-B21: Not supported</p>	<p>Only the listed 4x4 parts are fully supported.</p> <p>J9281B/J9281D</p> <ul style="list-style-type: none"> <li>■ 8121-1151</li> <li>■ 8121-1300</li> <li>■ 8121-1797</li> </ul> <p>J9283B/J9283D</p> <ul style="list-style-type: none"> <li>■ 8121-1152</li> <li>■ 8121-1298</li> <li>■ 8121-1798</li> </ul> <p>J9285B/J9285D or any type of 7 m DAC is not supported any 6300L model.</p> <p>S3L75A and S3L76A require the <b>interface-group {n} speed 10</b> command on the last 2 ports to use 10G (the ports default to 25G usecase). This is different than other 6300 models that auto-detect the inserted transceiver. This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. (ZTP is OK on these models if 25G optics are used, 25G is the default).</p> <p>S3L77A last 2 ports are 10G (LRM capable) and can use 10G optics without issue for ZTP (10G is the</p>



SFP+ (10G) copper capable product name	SKU	Minimum software required (J9281D, J9283D, J9285D, 487655-B21, 537963-B21)	Comments
			default for ports 51 and 52).
Aruba 6400 Modules	S0E91A/S0X44A	10G DACs are not supported through QSA28	<p>R0X39A/R0X40A (revision A) are no longer supported for use in the 6400 series.</p> <p>Only the following 4x4 part numbers are supported:</p> <p>J9281B/J9281D</p> <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> <p>J9283B/J9283D</p> <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> <p>J9285B/J9285D or any type of 7m DAC is not supported in any 6400 modules.</p> <p>R0X44A/R0X44C auto-detects the inserted type of transceiver; it does NOT require any interface groups like the 8325.</p>
	R0X39B, R0X40B R0X41A, R0X42A,R0X43A	J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.04.1000 *487655-B21 and *537963-B21: 10.08.0001	
	R0X39C, R0X40C R0X41C, R0X42C, R0X43C	10.09.1000 *487655-B21 and *537963-B21: 10.09.0001	
	R0X44A	J9281B/J9281D and J9283B/J9283D only (see comment for exception): 10.04.2000 *487655-B21 and *537963-B21: 10.08.0001	
	R0X44C	J9281B/J9281D and J9283B/J9283D only (see comment for exception): 10.09.1000  *487655-B21 and *537963-B21: 10.09.0001	
	S1T83A/S0E48A	J9281B/J9281D and J9283B/J9283D only (see comment for exception): 10.13.1000 *487655-B21 and *537963-B21: 10.13.0001	
8100 Switch Series	All models	J9281D, J9283D, *487655-B21, *537963-B21: 10.12.000x	<p>Only the following 4x4 part numbers are supported:</p> <p>J9281B/J9281D:</p> <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> <p>9283B/J9283D:</p> <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> <p>J9285B/J9285D or any type of 7m DAC is not supported in the 8100 models.</p>

SFP+ (10G) copper capable product name	SKU	Minimum software required (J9281D, J9283D, J9285D, 487655-B21, 537963-B21)	Comments
			*487655-B21,*537963-B21: See <a href="#">HPE servers and systems support</a> for HPE Interconnect support.
Aruba 8320 48p 10G SFP/SFP+ and 6p 40G QSFP+ Switch	JL479A  In QSFP+ ports	J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.00.0006 *487655-B21 and *537963-B21: 10.04.1000  10G DACs are not supported through QSA28	Only the following 4x4 part numbers are supported: J9281B/J9281D <ul style="list-style-type: none"> <li>■ 8121-1151</li> <li>■ 8121-1300</li> <li>■ 8121-1797</li> </ul> J9283B/J9283D: <ul style="list-style-type: none"> <li>■ 8121-1152</li> <li>■ 8121-1298</li> <li>■ 8121-1798</li> </ul> J9285B/J9285D or any type of 7m DAC is not supported in the 8320 models. 487655-B21 and 537963-B21: See <a href="#">HPE servers and systems support</a> for HPE Interconnect support.
Aruba 8325 48Y8C Switch	JL635A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>■ JL624A - Port-to-Power model (FB)</li> <li>■ JL625A - Power-to-Port model (BF)</li> </ul> In QSFP+ ports	J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.02.0001 *487655-B21 and *537963-B21: 10.04.1000  10G DACs are not supported through QSA28	Only the following 4x4 part numbers are supported: J9281D: <ul style="list-style-type: none"> <li>■ 8121-1151</li> <li>■ 8121-1300</li> <li>■ 8121-1797</li> </ul> J9283D: <ul style="list-style-type: none"> <li>■ 8121-1152</li> <li>■ 8121-1298</li> <li>■ 8121-1798</li> </ul> J9285B/J9285D or any type of 7m DAC is not supported in the 8325 models. 487655-B21 and 537963-B21: See <a href="#">HPE servers and systems support</a> for HPE Interconnect support. The 8325 requires configuration of <b>interface groups</b> (in groups of 12 ports) to enable use of 1G or 10G transceivers or DACs in the SFP28 ports (Interface Groups default to 25G speed). See the <a href="#">Hardware Guides</a> for details.
Aruba 8360 Switch Series	8360 32Y4C models JL717A/JL717C(v2) displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>■ JL700A/JL700C(v2)</li> </ul>	JL717A/JL717C(v2), JL718A/JL718C(v2), and JL722A/JL722C(v2): J9281B/J9281D and J9283B/J9283D only. See	Only the following 4x4 part numbers are supported: J9281B/J9281D: <ul style="list-style-type: none"> <li>■ 8121-1151</li> <li>■ 8121-1300</li> </ul>

SFP+ (10G) copper capable product name	SKU	Minimum software required (J9281D, J9283D, J9285D, 487655-B21, 537963-B21)	Comments
	<p>Port-to-Power model</p> <ul style="list-style-type: none"> <li>▪ JL701A/JL701C(v2) Power-to-Port model</li> </ul> <p>8360 16Y2C models JL718A displayed by CLI <b>show system</b></p> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul> <p>JL719C displayed by CLI <b>show system</b></p> <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul> <p>8360 24XF2C models JL722A/JL722C(v2) displayed by CLI <b>show system</b></p> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port model</li> </ul> <p>8360 48Y6C models</p>	<p>comment for exception): 10.06.0001 *487655-B21 and *537963-B21: 10.06.0001</p> <p>JL719C: J9281B/J9281D and J9283B/J9283D only. See comment for exception): 10.09.0002 *487655-B21 and *537963-B21: 10.09.0002</p> <p>10G DACs are not supported through QSA28</p>	<ul style="list-style-type: none"> <li>▪ 8121-1797</li> </ul> <p>J9283B/J9283D:</p> <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> <p>J9285B/J9285D or any type of 7m DAC is not supported in the 8360 models.</p> <p>487655-B21 and 537963- B21: See <a href="#">Support for HPE Servers and Systems products</a> for HPE Interconnect support.</p> <p>The 8360 32Y4C and 48Y6C models require configuration of <b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 32Y4C model do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted transceiver. Not applicable to the 24XF (1G/10G) model.</p> <p>See the <a href="#">Hardware Guides</a> for details.</p>
Aruba 8400X modules	JL363A	<p>J9281D, J9283D, J9285D: 10.00.0003 *487655-B21 and *537963-B21: 10.06.0001</p>	<p>Only the following 4x4 part numbers are supported:</p> <p>J9281B/J9281D:</p> <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> <p>J9283B/J9283D:</p> <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> <p>J9285B/J9285D:</p> <ul style="list-style-type: none"> <li>▪ 8121-1154</li> </ul>

SFP+ (10G) copper capable product name	SKU	Minimum software required (J9281D, J9283D, J9285D, 487655-B21, 537963-B21)	Comments
	JL687A	J9281D, J9283D, J9285D: 10.04.2000 *487655-B21 and *537963-B21: 10.06.0001	<ul style="list-style-type: none"> <li>▪ 8121-1305</li> <li>▪ 8121-1724</li> </ul> JL687A 32p 25G module requires configuration of <b>interface groups</b> (groups of four ports) to enable use of 1G or 10G transceivers or DACs in the SFP28 ports (Interface Groups default to 25G speed). See the <a href="#">Hardware Guides</a> for details.
Aruba 9300 Switch Series	Not supported		10G xcvr and DACs are not supported for use through a QSA28 adapter. The QSA28 adapter is not supported for use on the 9300 32D model at this time.
Aruba 10000 Switch Series	R8S96A displayed by CLI <b>show system</b> <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB bundle</li> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>	J9281D and J9283D only. See comment for exception: 10.10.0002 *487655-B21 and *537963-B21: 10.10.0002	Only the following 4x4 part numbers are supported: J9281D: <ul style="list-style-type: none"> <li>▪ 8121-1151</li> <li>▪ 8121-1300</li> <li>▪ 8121-1797</li> </ul> J9283D: <ul style="list-style-type: none"> <li>▪ 8121-1152</li> <li>▪ 8121-1298</li> <li>▪ 8121-1798</li> </ul> J9285D or any type of 7m DAC is not supported in the 10000 models. 487655-B21 and 537963-B21: See <a href="#">Support for HPE Servers and Systems products</a> for HPE Interconnect support. The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (set speed to 25g for the default). See the <i>Hardware Guides</i> for details.

### Gigabit SFP optical transceiver modules

In December 2017, Aruba introduced Revision D versions of 100M, 1G, and 10G transceivers. Revision D products are structured to be specific alternative vendors as sources for the SKU#. Earlier Revision A, B, or C product may have alternative vendors that we no longer actively ship, but remain as fully supported in earlier and current products.

Some switch products will be specifying Revision D transceivers for full support, while other products may support earlier (older) revision transceivers – and some with specific 4x4 part numbers (see [Identification of 4x4 part numbers](#) for information regarding 4x4 part numbers).

Always refer to the Datasheet or QuickSpecs for the Switch product to see the current list of supported transceivers.



- Although a 10G SFP+ transceiver module has the same physical dimensions of a 1G SFP transceiver, a 10G transceiver will NOT operate in a 1G SFP port.
- Many, although not all, 10G SFP+ ports have support to use a 1G SFP transceiver (or even a 100Mbps FX SFP transceiver). See the QuickSpecs for the Switch product and verify if the 1G or 100Mbps SFP transceiver is supported in the 10G SFP+ port.

### Models, specifications, and compatibility

Gigabit SFP optical transceiver modules use LC connectors.

The specifications for Revision D transceiver products are the same as the specified Revision A, B, and C SKUs. Where support for a Revision A, B, or C transceiver existed, Revision D or E parts are also supported. Not all earlier revisions can be re-used on newer product: Check the tables below and compare the 4x4 number of the part to the list of supported 4x4 numbers. See [Identification of 4x4 part numbers](#) for more information.

**Specifications for Gigabit SFP optical transceiver modules**

Product name (SKU)	DOM digital optical monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter (µm)	Modal bandwidth (MHz*km)	Transmission distance
HPE X121 1G SFP LC SX Transceiver (J4858C)  Aruba 1G SFP LC SX 500m MMF xcvr (J4858D)  Aruba 1G SFP LC SX 500m MMF TAA xcvr (JL745A)  Aruba 1G I-Tmp SFP LC SX 500m MMF xcvr (JL780A)	Yes (1990-4415, 1990-4395, 1990-4750, 1990-4793 ) JL780A: (1990-4763, 1990-4765)	Single lane, 850 1x1G NRZ	MMF	50/125	500 (OM2) 400	550m (1804.46 ft) 500 m (1640.42 ft)
				62.5/125	200 (OM1) 160	275m (902.23 ft) 220m (721.78 ft)
HPE X121 1G SFP LC LX Transceiver (J4859C)  Aruba 1G SFP LC LX 10km SMF xcvr (J4859D)  Aruba 1G SFP LC LX 10km SMF TAA xcvr (JL746A)  Aruba 1G I-Tmp SFP LC LX 10km SMF xcvr (JL781A)	Yes (1990-4116, 1990-4414, 1990-4608, 1990-4762) JL781A: (1990-4764, 1990-4766)	Single lane, 1310 1x1G NRZ	SMF	9/125	N/A	10km (6.21 miles)
			MMF	50/125	500 or 400	550m (1804.46 ft)
			MMF	62.5/125	500	550m (1804.46 ft)
HPE X121 1G SFP LC LH Transceiver (J4860C)  Aruba 1G SFP LC LH 70km SMF xcvr (J4860D)	Yes (1990-4363)	Single lane, 1550 1x1G NRZ	SMF	9/125	N/A	70km (43.49 miles)

### Optical specifications for Gigabit SFP optical transceiver modules

Product name (SKU)	Optical parameters (dBm)	
	Transmit power	Receive power
HPE X121 1G SFP LC SX Transceiver (J4858C)  Aruba 1G SFP LC SX 500m MMF xcvr (J4858D)  Aruba 1G SFP LC SX 500m MMF TAA xcvr (JL745A)  Aruba 1G ITmp SFP LC SX 500m MMF xcvr (JL780A)	-9.5 to 0	-17 to -3
HPE X121 1G SFP LC LX Transceiver (J4859C)  Aruba 1G SFP LC LX 10km SMF xcvr (J4859D)  Aruba 1G SFP LC LX 10km SMF TAA xcvr (JL746A)  Aruba 1G ITmp SFP LC LX 10km SMF xcvr (JL781A)	-9.5 to -3	-20 to -3
HPE X121 1G SFP LC LH Transceiver (J4860C)  Aruba 1G SFP LC LH 70km SMF xcvr (J4860D)	0 to +5	-22 to -3  (use 8dB attenuator for short SMF cables)

### Compatibility for gigabit SFP optical transceiver modules

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
2510 Switch Series	J9019A/B, J9020A, J9279A, J9280A	All	
2520 Switch Series	J9137A, J9138A, J9298A, J9299A	All	
2530 Switch Series	J9772A, J9773A, J9774A, J9775A, J9776A, J9777A, J9778A, J9779A, J9780A, J9781A, J9782A, J9783A, J9853A, J9854A, J9855A, J9856A	All	
2540 Switch Series	JL354A, JL355A, JL356A, JL357A	All	

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
2600 Switch Series	J4899A/B/C, J4900A/B/C, J8164A, J8165A, J8762A	H.08.98	
2610 Switch Series	J9085A, J9086A, J9087A, J9088A, J9089A	All	
2615-8-PoE Switch	J9565A	All	
2620 Switch Series	J9623A, J9624A, J9625A, J9626A, J9627A	All	
2800 Switch Series	J4903A, J4904A	I.08.103	
2810 Switch Series	J9021A, J9022A	All	
2900 Switch Series	J9049A, J9050A	T.13.45	
2910al Switch Series	J9145A, J9146A, J9147A, J9148A	All	For use in the SFP ports on the models listed, and in the J9008A 2-port 10GbE SFP+ al module.
2915-8G-PoE Switch	J9562A	All	
2920 Series Switches	J9726A, J9727A, J9728A, J9729A, J9836A	All	For use in the SFP ports on the models listed. Also for use in the dual-speed SFP+ ports of the J9731A 2-Port 10GbE SFP+ Module.
2930F Series Switches	JL253A, JL254A, JL255A, JL256A, JL258A, JL259A, JL260A, JL261A, JL262A, JL263A, JL264A, JL557A, JL558A, JL559A	J4858C/D, J4859C/D, J4860C/D: All WC Software JL745A, JL746A (TAA xcvrs): WC 16.08.0021 and 16.10.0006 and later	
2930M Switch Series	JL319A, JL320A, JL321A, JL322A, JL323A, JL324A	J4858C/D, J4859C/D, J4860C/D: All WC Software JL745A, JL746A (TAA xcvrs): WC 16.08.0021 and 16.10.0006 and later	For use in SFP ports on switch and an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module.
3400cl	J4905A, J4906A	All	



SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
Switch Series			
3500 Series Switches	J9470A, J9471A, J9472A, J9473A	K.14.31	
3500yl Switch Series	J8692A, J8693A	All	For use in the SFP ports on the models listed, and in an installed J9312A 10GbE 2-port SFP+/2-port CX4 yl Model
	J9310A, J9311A	K.14.50	
3800 Switch Series	J9573A, J9574A, J9575A, J9576A, J9584A	All	
3810M Switch Series	JL071A, JL072A, JL073A, JL074A, JL076A, JL075A	J4858C/D, J4859C/D, J4860C/D: All Software JL745A, JL746A (TAA xcvrs): 16.08.0021 and 16.10.0006 and later	For use in the JL075A 3810M switch. Also for use in any 3810M switch with a JL083A Aruba 3810M/2930M 4SFP+ MACsec Module installed.
4100gl Switch Series	J4893A, J4908A	G.07.103	
Aruba 4100i Switch Series	JL817A, JL818A	J4858D, J4859D, J4860D: 10.08.0001 (Commercial Temp) JL780A, JL781A: 10.08.0001 (Ind Temp)	Hi Temp warnings will trigger at lower temperatures (~50C) if Commercial Temp vs Industrial Temp transceivers (~70C) are used. All Third Party transceivers are treated as Commercial Temp, regardless of capability.
4200vl Switch Series	J8776A, J9033A	All	
5300xl Switch Series	J4878A/B, J4907A	E.10.36	

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
5400zl Switch Series	J8705A, J8706A	All	
	J9308A, J9309A	K.14.34	The J9309A 4-port SFP+ module only supports 10G transceivers.
	J9537A, J9549A, J9535A, J9637A, J9538A, J9548A, J9536A	K.15.02.0004	The J9538A 8-port SFP+ v2 module supports both 1G and 10G transceivers.
5400R Switch Series	J9537A, J9549A, J9535A, J9637A, J9538A, J9548A, J9536A	J4858C/D, J4859C/D, J4860C/D: All Software JL745A, JL746A (TAA xcvrs): 16.08.0021 and 16.10.0006 and later	The J9538A 8-port SFP+ v2 module supports both 1G and 10G transceivers.
	J9988A, J9989A, J9990A, J9993A	KB.15.17	
Aruba 6000 Switch Series	All models (1G uplink only) NO support for 100Mbps FX.	J4858C/J4858D, J4859C/J4859D: JL745A, JL746A (TAA): 10.08.0001  J4860C/J4860D: not supported	Only the following 4x4 part numbers are supported: J4858C/J4858D: <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> J4859C/J4859D <ul style="list-style-type: none"> <li>▪ 1990-4116</li> <li>▪ 1990-4414</li> </ul>
Aruba 6100 Switch Series	All models	J4858C/J4858D, J4859C/J4859D: 10.06.0001 JL745A, JL746A (TAA xcvrs): 10.06.0130 and 10.07.0010  J4860C/J4860D: not supported	Only the following 4x4 part numbers are supported: J4858C/J4858D: <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> J4859C/J4859D: <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul>
6108 Switch	J4902A	H.07.88	
6120 Blade Switch Series	498358-B21, 516733-B21	SX, LX: all versions LH: not supported	
6200yl-24G-mGBIC Switch	J8992A	All	

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
Aruba 6200 Switch Series	All 6200F models 12p models R8Q72A/R8V13A (TAA)	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.04.1000 JL745A, JL746A (TAA): 10.06.0130 and 10.07.0010	Only the following 4x4 part numbers are supported: J4858C/J4858D: <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> J4859C/J4859D: <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul> J4860C/J4860D: <ul style="list-style-type: none"> <li>▪ 1990-4363</li> </ul>
Aruba 6200F B-revision	All 6200M models and 6200F 12p models R8Q72A/R8V13A(TAA)	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: JL745A, JL746A (TAA): 10.11.0005	<p><b>Aruba 6300 Switch Series only:</b> Hardware limitations for the following SKUs:</p> <p>6300M R8S89A and R8S90A and 6300L S3L75A and S3L76A: Cannot support 1G transceivers in uplinks</p> <p>R8S91A port 51-52 require the <b>interface-group {n} speed 10</b> command (the ports default to 10G use-case). This is different than other 6300 models that auto-detect the inserted transceiver. This may affect Zero-Touch-Provisioning (ZTP) due to a non-factory config. (ZTP is OK on these models if 10G optics are used, for R8S91A, 10G is</p>
	JL724B through JL728B, S0M81A through S0M90A	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: JL745A, JL746A (TAA):10.13.0001	

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
			the default for ports 51-52).
Aruba 6300 Switch Series	All models except JL762A, R8S89A, R8S90A, R8S91A, R8S92A:  JL745A, JL746A (TAA xcvrs):  JL762A (6300 Pwr2Prt):  R8S91A, R8S92A:  R8S89A/R8S90A:  S0E91A, S0X44A (100G models)	10.04.0001  10.06.0130 and 10.07.0010  10.08.0001  10.10.0002  Refer to Comments column  Not supported through QSA28 (the QSFP28 port cannot support 1G speeds)	R8S92A 1G only in ports 1-24 (1G not supported in uplinks ports 49-52).
Aruba 6300L Switch Series	All models S3L75A, S3L76A: No support for 1G S3L77A: Only in ports 51-52	10.14.0001	
Aruba 6400 Modules	R0X39B, R0X40B R0X41A, R0X42A, R0X43A  R0X44A  R0X39C, R0X40C, R0X41C, R0X42C, R0X43C, R0X44C  S1T83A (24p SR10 4p 100G)  S0E48A (32p 25G 4p 100G)	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.04.1000 JL745A, JL746A (TAA): 10.06.0130 and 10.07.0010  For R0X44A module: J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.04.2000 JL745A, JL746A (TAA xcvrs): 10.06.0130 and 10.07.0010  10.09.1000  10.13.1000  Not supported	R0X39A/R0X40A (revision A) are no longer supported for use in the 6400 series. Only the following 4x4 part numbers are supported: J4858C/J4858D: <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> J4859C/J4859D: <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul> R0X44A/R0X44C when in default mode, auto-detects the inserted type of transceiver; it does NOT require any interface groups like the 8325.  R0X44C has the added feature of enabling the bottom ports to accept a 50G product, and in this mode, will NOT accept these 1G transceivers(see 50G SFP56 chapter).

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
6600 Switch Series	J9263A, J9264A	K.14.03	
	J9451A	K.14.24	
Aruba 8100 Series	Models with SFP+ ports	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: JL745A, JL746A (TAA xcvrs): 10.12.000x	Only in SFP+ ports NOT supported thru QSA28
8200zl Switch Series	J8705A, J8706A	All	
	J9308A, J9309A	K.14.34	The J9309A 4-port SFP+ module only supports 10G transceivers
	J9537A, J9549A, J9535A, J9637A, J9538A, J9548A, J9536A	K.15.02.0004	The J9538A 8-port SFP+ v2 module supports both 1G and 10G transceivers.
Aruba 8320 48p 10G SFP/SFP+ and 6p 40G QSFP+ Switch	JL479A	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.03.0001 JL745A, JL746A (TAA xcvrs): 10.06.0130 and 10.07.0010	Only the following 4x4 part numbers are supported: J4858C/J4858D: <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> J4859C/J4859D: <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul> J4860C/J4860D: <ul style="list-style-type: none"> <li>▪ 1990-4363</li> </ul>
Aruba 8325 Switch Series	JL635A displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.03.0010 JL745A, JL746A (TAA xcvrs): 10.06.0130 and 10.07.0010	Only the following 4x4 part numbers are supported: J4858C/J4858D: <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> J4859C/J4859D: <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul> J4860C/J4860D: <ul style="list-style-type: none"> <li>▪ 1990-4363</li> </ul> The 8325 requires configuration of "interface groups" (groups of 12 ports) to enable use of 1G or 10G transceivers or DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
			1G optics at the opposite end of the link must NOT enable auto-negotiation and operate in full duplex mode.
Aruba 8360 Switch Series	<p>8360 32Y4C models JL717A/JL717C(v2) displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL700A/JL700C(v2) A Power-to-Port model</li> </ul> <p>8360 16Y2C models JL718A/JL718C(v2) displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL702A/JL702C(v2) A Power-to-Port model</li> </ul> <p>8360 24XF2C models JL722A/JL722C(v2) displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port model</li> </ul> <p>8360 48Y6C models JL719C displayed by CLI (show system)</p> <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul>	<p>JL717A/JL717C(v2), JL718A/JL718C(v2), JL722A/JL722C(v2): J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.06.0001 JL745A, JL746A (TAA xcvrs): 10.06.0130 and 10.07.0010</p> <p>JL719C: J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.09.0002 JL745A, JL746A (TAA xcvrs): 10.09.0002</p>	<p>Only the following 4x4 part numbers are supported: J4858C/J4858D:</p> <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> <p>J4859C/J4859D:</p> <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul> <p>J4860C/J4860D:</p> <ul style="list-style-type: none"> <li>▪ 1990-4363</li> </ul> <p>The 8360 32Y4C and 48Y6C models require configuration of "interface groups" only for ports 1-4 (as group #1) to enable the use of 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 32Y4C model do not support 1G transceivers. All other ports can individually auto-detect the speed of the inserted xcvr. Not applicable to the 24XF (1G/10G) model See the Hardware Guides for details.</p>
Aruba 8400X Modules	JL363A JL687A	<p>For JL363A module: J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.00.0018 JL745A, JL746A (TAA xcvrs): 10.07.0005 For JL687A module: J4858C/J4858D, J4859C/J4859D, J4860C/J4860D: 10.04.2000 JL745A, JL746A (TAA</p>	<p>Only the following 4x4 part numbers are supported: J4858C/J4858D:</p> <ul style="list-style-type: none"> <li>▪ 1990-4395</li> <li>▪ 1990-4750</li> <li>▪ 1990-4793</li> </ul> <p>J4859C/J4859D:</p> <ul style="list-style-type: none"> <li>▪ 1990-4762</li> </ul> <p>J4860C/J4860D:</p> <ul style="list-style-type: none"> <li>▪ 1990-4363</li> </ul> <p>JL687A 32p 25G module requires configuration of</p>

SFP (1G) capable product name	SKU	Minimum software required (J4858C/J4858D, J4859C/J4859D, J4860C/J4860D)	Comments
		xcvrs): 10.07.0005	interface groups (groups of 4 ports) to enable use of 1G or 10G transceivers or DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details. JL687A: 1G optics at the opposite end of the link must not enable auto-negotiation and operate in full duplex mode (does not apply to the JL363A module)
9300 Switch Series	Not supported		1G products are not supported on the 9300 32D model
9300m Switch Series	J4885A, J4894A	All	
9408sl Switch	J8684A	All	
Aruba 10000 Switch Series	R8S96A displayed by CLI (show system) <ul style="list-style-type: none"> <li>■ R8P13A - 48Y6C FB bundle</li> <li>■ R8P14A - 48Y6C BF bundle</li> </ul>	J4858D, J4859D, J4860D: 10.10.0002 JL745A, JL746A (TAA): 10.10.0002	The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Set the speed to 25g for the default). See the Hardware Guides for details. 1G optics at the opposite end of the link must NOT enable auto negotiation and operate in full duplex mode.

## 100-Megabit SFP optical transceiver modules



### Models, specifications, and compatibility

100 Megabit SFP optical transceiver modules use LC connectors. The 100FX transceivers enabled by Aruba Switches use an SGMII (Serial Gigabit MII) interface with 8B/10B encoding.

Other 100FX transceivers that use 4B/5B encoding cannot be enabled (even with UT-mode).

The specifications for Revision D transceiver products are the same as the specified Revision A, B, and C SKUs.

#### Specifications for 100-Megabit SFP optical transceiver modules

Product name (SKU)	DOM - digital optical monitoring (4x4 part #)	Nominal wl (nm) & encoding type	Fiber mode	Fiber diameter (µm)	Transmission distance
HPE X111 100M SFP LC FX Transceiver (J9054C) Aruba 100M SFP LC FX 2km MMF xcvr (J9054D)	Yes (1990-4483 EOL, 1990-4360, 5400-3917)	Single lane, 1310 1x100Mbps NRZ	MMF	50/125 62.5/125	2km (1.24 miles)

#### Optical specifications for 100-Megabit SFP optical transceiver modules

Product name (SKU)	Optical parameters (dBm)	
	Transmit power	Receive power
HPE X111 100M SFP LC FX Transceiver (J9054C) Aruba 100M SFP LC FX 2km MMF xcvr (J9054D)	-19 to -14	-30 to -14

#### Compatibility for the 100-Megabit SFP optical transceiver module

SFP (100Mbps) capable product name	SKU	100-Megabit SFP Minimum software required	Comments
2510-24 Switch	J9019A/B	Q.10.04	



SFP (100Mbps) capable product name	SKU	100-Megabit SFP Minimum software required	Comments
2510-48 Switch	J9020A	All	
<b>Aruba 2510G Switch Series</b>	J9279A, J9280A	All	
<b>Aruba 2520 Switch Series</b>	J9137A, J9138A	All	
<b>Aruba 2520G Switch Series</b>	J9298A, J9299A	J9054B: All J9054C: J.14.32	
<b>Aruba 2530 Switch Series</b>	J9772A, J9773A, J9774A, J9775A, J9776A, J9777A, J9778A, J9779A, J9780A, J9781A, J9782A, J9783A, J9853A, J9854A, J9855A, J9856A	For J9853A, J9854A, J9855A, and J9856A: Not supported For all other switches: All	For use in the SFP ports of the 2530 Series Switches. (The J9853A, J9854A, J9855A, and J9856A models have 1G/10G SFP+ ports that do not support these 100Mbps transceiver modules.)
<b>Aruba 2540 Switch Series</b>	JL354A, JL355A, JL356A, JL357A	All	
<b>Aruba 2610 Switch Series</b>	J9085A, J9086A, J9087A, J9088A, J9089A	All	
2615-8-PoE Switch	J9565A	J9054B: All J9054C: A.14.07	
<b>Aruba 2620 Switch Series</b>	J9623A, J9624A, J9625A, J9626A, J9627A	All	
<b>Aruba 2800 Switch Series</b>	J4903A, J4904A	J9054B/C 1990-3613 and J9054C 1990-4112: i.10.30 J9054C 1990-4483: Not supported	J9054C part number 1990-4483 is not supported
<b>Aruba 2810 Switch Series</b>	J9021A, J9022A	N.10.07	
<b>Aruba 2900 Switch Series</b>	J9049A, J9050A	T.12.01	
<b>Aruba 2910a1 Switch Series</b>	J9145A, J9146A, J9147A, J9148A	All	
2915-8G-PoE Switch	J9562A	J9054C/J9054D: A.14.07	
<b>Aruba 2920 Series Switches</b>	J9726A, J9727A, J9728A, J9729A, J9836A	All	Use in the SFP ports of the 2920 Series Switches. 100FX is not supported in the SFP+ ports of the J9731A 2-Port 10GbE SFP+ Module

SFP (100Mbps) capable product name	SKU	100-Megabit SFP Minimum software required	Comments
<b>Aruba 2930F Switch Series</b>	All models	J9054B: is not supported in the 2930F Series Switches For J9054C/9054D: All	The 2930F Switch Series models with 1G/10G SFP+ ports added support for this J9054C/J9054D 100FX transceiver. The J9054C/J9054D are supported in models with 1G SFP ports.
<b>Aruba 2930M Switch Series</b>	JL319A, JL320A, JL321A, JL322A, JL323A, JL324A	J9054B is not supported in the 2930M Series Switches. For J9054C/J9054D: All	For use in SFP ports on switch and an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module.
<b>Aruba 3500 Series Switches</b>	J9470A, J9471A, J9472A, J9473A	J9054B/C 1990-3613: K.14.31 J9054C 1990-4112 and 1990-4483: K.15.08.0007 J9054D: K.15.08.0007	
<b>Aruba 3500yl Switch Series</b>	J8692A, J8693A, J9310A, J9311A	For J8692A, J8693A: K.12.01 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483, and J9054D 1990-4483 and 1990-4360) For J9310A, J9311A: K.14.50 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483, and J9054D)	
<b>Aruba 3800 Switch Series</b>	J9573A, J9574A, J9575A, J9576A, J9584A	For J9573A, J9574A, J9575A, J9576A: Not supported. For J9584A: All	Not supported for use in the following 3800 models: J9573A, J9574A, J9575A, and J9576A. The SFP+ ports do not support 100M operation. Supported in the J8584A 3800-24SFP-2SFP+ Switch
<b>Aruba 3810M Switch Series</b>	JL071A, JL072A, JL073A, JL074A, JL076A	All	For use in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module.
	JL075A	All	For use in the JL075A SFP+ ports. Also used in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module.
<b>Aruba 4100gl Switch Series</b>	J4865A, J4887A	n/a	J9054C/J9054D 100FX is not supported.
<b>Aruba 4100i Switch Series</b>	JL817A, JL818A	10.08.0001	Hi Temp warnings will trigger at lower temperatures (~50C) if Commercial Temp vs Industrial Temp transceivers (~70C) are used. All Third Party

SFP (100Mbps) capable product name	SKU	100-Megabit SFP Minimum software required	Comments
			transceivers are treated as Commercial Temp, regardless of capability.
<b>Aruba 4200vl Switch Series</b>	J8770A, J8771A, J8772A/B, J8773A	L.10.24	Supported: J9033A Switch vl 20-Port Gig-T + 4-Port SFP Module Not supported: J8776A Switch vl 4-Port Mini-GBIC Module
<b>Aruba 5300xl Switch Series</b>	J4819A, J4850A	n/a	J9054C/J9054D 100FX is not supported.
<b>Aruba 5400zl Switch Series</b>	J8697A, J8698A, J9642A, J9643A	For J8705A and J8706A modules: K.12.01 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007 For the J9308A module: K.14.34 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007 For J9537A, J9549A, J9535A, and J9637A modules: K.15.02.0004 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007	J8705A Switch zl 20-Port 10/100/1000 + 4-Port Mini-GBIC Module J8706A Switch zl 24-Port Mini-GBIC Module J9308A 20-Port 10/100/1000 PoE+ and 4-Port SFP zl Module J9537A 24-Port SFP v2 zl Module J9549A 20-Port Gig-T / 4-Port SFP v2 zl Module J9535A 20-Port Gig-T PoE+ / 4-Port SFP v2 zl Module J9637A 12-Port Gig-T PoE+ / 12-Port SFP v2 zl Module
<b>Aruba 5400R Switch Series</b>	J9821A, J9822A, J9823A, J9824A, J9825A, J9826A, J9868A	For J9535A, J9537A, J9549A, and J9637A modules: All For the J9988A, J9989A, J9990A, and J9993A modules: KB.15.17 and later	J9537A 24-Port SFP v2 zl Module J9549A 20-Port Gig-T / 4-Port SFP v2 zl Module J9535A 20-Port Gig-T PoE+ / 4-Port SFP v2 zl Module J9637A 12-Port Gig-T PoE+ / 12-Port SFP v2 zl Module J9988A 24p 1GbE SFP v3 zl2 Module J9989A 12p PoE+ / 12p 1GbE SFP v3 zl2 Module J9990A 20p PoE+ / 4p SFP+ v3 zl2 Module J9993A 8p 1G/10GbE SFP+ v3 zl2 Module
<b>Aruba 6000 Switch Series</b>	All models	n/a	100FX is not supported
<b>Aruba 6100 Switch</b>	All models	n/a	100FX is not supported

SFP (100Mbps) capable product name	SKU	100-Megabit SFP Minimum software required	Comments
<b>Series</b>			
6108 Switch	J4902A	n/a	100FX is not supported
6120 Blade Switch Series	498358-B21, 516733-B21	n/a	100FX is not supported
6200yl-24G-mGBIC Switch	J8992A	K.12.01 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007	For use in all 24 ports of the J8992A Switch 6200yl- 24G-mGBIC
<b>Aruba 6200 Switch Series</b>	JL724A through JL728A	Not supported	100FX is not supported for use in earlier 6200F models (JL724A through JL728A) 100FX supported in later models, including 6200M
	All other 6200F and 6200M models	J9054D: 10.11.1001	
<b>Aruba 6300 Switch Series</b>	JL658A	10.06.0120 or 10.07.0010	Only supported for use in SFP+ ports on JL658A/RS892A. 100FX is not supported for use in any SFP56 ports on other models. 100FX link level flow control: not supported.
	R8S92A	10.10.0002	
	S0E91A, S0X44A (100G models)	Not supported through QSA28	
<b>Aruba 6300L Switch Series</b>	All models	Not supported	
<b>Aruba 6400 Switch Series</b>	R0X43A	10.06.0120 or 10.07.0010	R0X43A/R0X43C 24p SFP+ module: Only supported in ports 1-24 (SFP+), NOT supported in ports 25-28 (SFP56 ports). R0X44A 48p SFP28: supported for use in ports 1-48 (SFP28 ports). R0X44A/R0X44C auto-detects the inserted type of transceiver; it does NOT require any <b>interface groups</b> like the 8325. 100FX is NOT supported in any SFP56 port on any other 6400 module. 100FX does not support link-level flow control on the 6400.
	R0X44A	10.06.0120 or 10.07.0010	
	R0X44C	10.09.1000	
	S0E48A / S1T83A	Not supported (Hdw limitation)	
<b>Aruba 6600 Switch Series</b>	J9263A, J9264A, J9265A, J9451A, J9452A	For J9263A, J9264A: K.14.03 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483)	For use in the SFP ports of the J9263A 6600-24G Switch, the J9264A 6600-24G-4XG Switch, and the J9451A 6600-48G Switch

SFP (100Mbps) capable product name	SKU	100-Megabit SFP Minimum software required	Comments
		For J9451A: K.14.24 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007	(The J9265A 6600-24XG Switch and J9452A 6600- 48G-4XG Switch do not have SFP ports)
<b>8100 Switch Series</b>	All models	No support for 100Mbps xcvs	
<b>8200zl Switch Series</b>	J8715A/B, J9475A, J9640A, J9641A	For J8705A and J8706A modules: All (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007 For the J9308A module: K.14.34 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007 For J9537A, J9549A, J9535A, and J9637A modules: K.15.02.0004 (for J9054B/C 1990-3613); K.15.08.0007 (for J9054C 1990-4112 and 1990-4483) J9054D: K.15.08.0007	J8705A Switch zl 20-Port 10/100/1000 + 4-Port Mini-GBIC Module J8706A Switch zl 24-Port Mini-GBIC Module J9308A 20-Port 10/100/1000 PoE+ and 4-Port SFP zl Module J9537A 24-Port SFP v2 zl Module J9549A 20- Port Gig-T / 4-Port SFP v2 zl Module J9535A 20-Port Gig-T PoE+ / 4-Port SFP v2 zl Module J9637A 12-Port Gig- T PoE+ / 12-Port SFP v2 zl Module
<b>Aruba 8320 Switch Series</b>	All	n/a	100Mbps Transceivers are NOT supported in the 8320 series.
<b>Aruba 8325 Switch Series</b>	All	n/a	100Mbps Transceivers are NOT supported in the 8325 series.
<b>Aruba 8360 Switch Series</b>	48Y6C models: JL719C base (JL704C/JL705C) ports 5-48	10.13.1000 J9054D: 10.13.1000 only on the 48Y6C models ports 5-48	100Mbps Transceivers only on the models listed. 48Y6C and 32Y4C not supported in ports 1-4 (MACsec PHY limitation).
<b>Aruba 8400X Modules</b>	All	n/a	100Mbps Transceivers are NOT supported in the 8400 series.
<b>9300m Switch Series</b>	J4138A, J4139A, J4874A	n/a	100FX is not supported.
9408sl Switch	J8680A	n/a	100FX is not supported.
<b>Aruba 10000 Switch Series</b>	All	n/a	100Mbps Transceivers are NOT supported in the 10000 series.

## Gigabit BiDi optical transceiver modules

**Gigabit BiDi transceivers are no longer offered by Aruba.** The information presented here is for compatibility use.



### Models, specifications, and compatibility

Gigabit BiDi optical transceiver modules provide a transmission rate of 1,250 Mbps and use LC connectors.

- The J9142B/J9143B were End of Sale in April 2016 and are no longer available. Older J9142B/J9143B transceivers may work in switches using the "allow-unsupported-transceiver" feature. Consult your Aruba Sales team for alternative solutions. The information presented here is for compatibility use.
- BiDi optical transceiver modules use different nominal wavelengths in transmit and receive directions to implement bidirectional transmission of fiber signals over the same fiber.
- Use the HPE X122 1G SFP LC BX 10-D Transceiver (J9142B) and HPE X122 1G SFP LC BX 10-U Transceiver (J9143B) in pairs: a J9142B (where D = downstream) at one end of the connection and a J9143B (where U = upstream) at the other.

#### Specifications for Gigabit BiDi optical transceiver modules

Product name (SKU)	DOM - digital optical monitoring (4x4 part #)	Nominal wavelength (nm) & encoding type		Fiber mode	Fiber diameter (µm)	Transmission distance
		Transmit end (TX)	Receive end (RX)			
HPE X122 1G SFP LC BX-D Transceiver (J9142B)	No	1490 1x1G NRZ	1310 1x1G NRZ	SMF	9/125	10km (6.21 miles)
HPE X122 1G SFP LC BX-U Transceiver (J9143B)	No	1310 1x1G NRZ	1490 1x1G NRZ			

### Optical specifications for Gigabit BiDi transceiver modules

Product name (SKU)	Optical parameters (dBm)	
	Transmit power	Receive power
HPE X122 1G SFP LC BX-D Transceiver (J9142B) HPE X122 1G SFP LC BX-U Transceiver (J9143B)	-9 to -3	-18.7 to -3

### Compatibility for Gigabit BiDi transceiver modules

SFP 1G BiDi capable product name	SKU	Minimum software required (J9142B, J9143B)	Comments
2510-24 Switch	J9019A/B	Q.11.16	
2510-48 Switch	J9020A	U.11.10	
2510G-24 Switch	J9279A	Y.11.03	
2510G-48 Switch	J9280A	Y.11.03	
2520 Switch Series	J9137A, J9138A, J9298A, J9299A	All	
2530 Switch Series	J9772A, J9773A, J9774A, J9775A, J9776A, J9777A, J9778A, J9779A, J9780A, J9781A, J9782A, J9783A, J9853A, J9854A, J9855A, J9856A	All	
2540 Switch Series	JL354A, JL355A, JL356A, JL357A	n/a	1G BX is not officially supported for use in the 2540 series.
2600 Switch Series	J4899A/B/C, 4900A/B/C, J8164A, J8165A, J8762A	H.10.72	
2610 Switch Series	J9085A, J9086A, J9087A, J9088A, J9089A	R.11.22	
2615-8-PoE Switch	J9565A	All	
2620 Switch Series	J9623A, J9624A, J9625A, J9626A, J9627A	All	
2800 Switch Series	J4903A, J4904A	i.10.69	
2810 Switch Series	J9021A, J9022A	N.11.14	
2900 Switch Series	J9049A, J9050A	T.13.45	


SFP 1G BiDi capable product name	SKU	Minimum software required (J9142B, J9143B)	Comments
2910al Switch Series	J9145A, J9146A, J9147A, J9148A	All	
2915-8G-PoE Switch	J9562A	All	
2920 Series Switches	J9726A, J9727A, J9728A, J9729A, J9836A	All	
2930F Series Switches	JL253A, JL254A, JL255A, JL256A, JL258A, JL259A, JL260A, JL261A, JL262A, JL263A, JL264A	Supported for use with 16.07.0003 software. Enabled only through UT-Mode.	As of April 2016, the J9142B and J9143B 1G BX transceivers have been End of Sale. Contact your Aruba representative for alternative solutions.
2930M Switch Series	JL319A, JL320A, JL321A, JL322A, JL323A, JL324A, JL083A	Supported for use with 16.07.0003 software. Enabled only through UT-Mode.	As of April 2016, the J9142B and J9143B 1G BX transceivers have been End of Sale. Contact your Aruba representative for alternative solutions.
3500 Series Switches	J9470A, J9471A, J9472A, J9473A	K.14.31	
3500yl Switch Series	J8692A, J8693A	K.14.31	
	J9310A, J9311A	K.14.50	
3800 Switch Series	J9573A, J9574A, J9575A, J9576A, J9584A	All	
3810M Switch Series	JL075A, JL083A	All	As of April 2016, the J9142B and J9143B 1G BX transceivers have been End of Sale. Contact your Aruba representative for alternative solutions. For use in the JL075A 3810M switch or in any 3810M switch with a JL083A Aruba 3810M/2930M 4SFP+ MACsec Module installed.
4200vl Switch Series	J8776A, J9033A	L.11.16	
5300xl Switch Series	J4878A/B, J4907A	E.11.08	



SFP 1G BiDi capable product name	SKU	Minimum software required (J9142B, J9143B)	Comments
5400zl Switch Series	J8705A, J8706A	K.13.45	
	J9308A	K.14.34	
	J9537A, J9549A, J9535A, J9637A, J9538A, J9548A, J9536A	K.15.02.0004	
5400R Switch Series	J9537A, J9549A, J9535A, J9637A, J9538A, J9548A, J9536A	All	As of April 2016, the J9142B and J9143B 1G BX transceivers have been End of Sale. Contact your Aruba representative for alternative solutions.
	J9988A, J9989A, J9990A, J9993A	KB.15.17	
Aruba 6000 Switch Series	All	n/a	1G BX transceivers are not officially supported.
Aruba 6100 Switch Series	All	n/a	1G BX transceivers are not officially supported.
6200yl-24G-mGBIC Switch	J8992A	K.13.45	
Aruba 6200 Switch Series	All	n/a	1G BX transceivers are not officially supported.
Aruba 6300 Switch Series	All	n/a	1G BX transceivers are not officially supported.
Aruba 6400 Switch Series	All	n/a	1G BX transceivers are not officially supported.
6600 Switch Series	J9263A, J9264A	K.14.03	
	J9451A	K.14.24	
8200zl Switch Series	J8705A, J8706A	K.13.45	
	J9308A	K.14.34	
	J9537A, J9549A, J9535A, J9637A, J9538A, J9548A, J9536A	K.15.02.0004	
Aruba 8320 Switch Series	JL479A, JL579A	n/a	1G BX transceivers are not officially supported.
Aruba 8325 Switch Series	All	n/a	1G BX transceivers are not officially supported.

SFP 1G BiDi capable product name	SKU	Minimum software required (J9142B, J9143B)	Comments
Aruba 8400X Modules	All	n/a	1G BX transceivers are not officially supported.
Aruba 10000 Switch Series	All	n/a	1G BX transceivers are not officially supported.

## Gigabit SFP copper transceiver modules

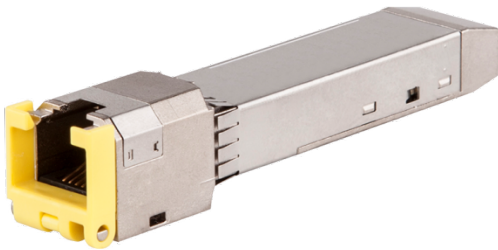

### Models, specifications, and compatibility

The use of Gigabit SFP copper transceiver modules in a switch with only SFP or SFP+ ports, provides IEEE 802.3ab compliance.

#### Specifications for SFP copper transceiver modules

Product name (SKU)	Transmission distance	Data rate	Cable type	Connector type
HPE X121 1G SFP RJ45 T Transceiver (J8177C) Aruba 1G SFP RJ45 T 100m Cat5e xcvr (J8177D) Aruba 1G SFP RJ45 T 100m Cat5e TAA xcvr(JL747A)	100 m (328.08 ft)	1G 100Mbps (For certain products. See next table.)	Cat5e UTP/STP	RJ45

#### Compatibility for SFP copper transceiver modules

The specifications for Revision D transceiver products are the same as the specified Revision A, B, and C SKUs.

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
2510 Switch	J9020A	All	
2530 Switch	J9782A, J9781A, J9776A,	All	

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
Series	J9775A, J9779A, J9778A, J9773A, J9772A, J9856A, J9855A, J9854A, J9853A		
2540 Switch Series	JL354A, JL355A, JL356A, JL357A	All	
2610 Switch Series	J9085A, J9086A, J9087A, J9088A, J9089A	All	
2620 Switch Series	J9623A, J9624A, J9625A, J9626A, J9627A	All	
2920 Series Switches	J9731A	All	J8177C/J8177D is not supported for use in the Dual-Personality ports of the 2920 Series Switches. For use ONLY in the J9731A module.
2930F Series Switches	JL253A, JL254A, JL255A, JL256A, JL258A, JL259A, JL260A, JL261A, JL262A, JL263A, JL264A, JL557A, JL558A, JL559A	J8177C/J8177D: All Software JL747A (TAA xcvrs): WC 16.10.0012	J8177C/J8177D support both 100Mbps and 1G operation in this Switch Series.
2930M Switch Series	JL083A	J8177C/J8177D: All Software JL747A (TAA xcvrs): WC 16.10.0012	J8177C/J8177D are not supported for use in the Dual-Personality ports of the 2930M Series Switches. For use in an installed JL083A Aruba 3810M/2930M 4SFP+ MACsec Module. J8177C/J8177D support both 100Mbps and 1G operation in this Switch Series.
3800 Switch Series	J9573A, J9574A, J9575A, J9576A, J9584A	All	
3810M Switch Series	JL075A, JL083A	J8177C/J8177D: All Software JL747A (TAA xcvrs): KB 16.10.0012	For use in the SFP+ ports of the JL075A 3810M switch. Also used in any 3810M switch with a JL083A Aruba 3810M/2930M 4SFP+ MACsec Module installed. J8177C/J8177D support both 100Mbps and 1G operation in this Switch Series.
4100gl Switch Series	J4893A, J4908A	G.07.69	
4200vl Switch Series	J8776A, J9033A	All	
5300xl Switch Series	J4878A/B	E.09.22	

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
5400zl Switch Series	J8705A, J8706A	All	
	J9308A	K.14.34	
	J9537A, J9549A, J9535A, J9637A	K.15.02.0004	
5400R Switch Series	J9537A, J9549A, J9535A, J9637A	J8177C/J8177D: All Software JL747A: KB 16.10.0012	J8177C/J8177D support both 100Mbps and 1G operation in this Switch Series.
	J9988A, J9989A, J9990A, J9993A	KB.15.17 JL747A (TAA xcvrs): KB 16.10.0012	J8177C/J8177D support both 100Mbps and 1G operation in this Switch Series.
Aruba 6000 Switch Series	All models	10.08.0001	100Mbps speed is NOT supported for the J8177D when used in the SFP port on the 6000 Series. J8177D does not support link-level flow control on 6000. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul>
Aruba 6100 Switch Series	All models	10.06.0001 JL747A (TAA xcvrs): 10.06.0130 and 10.07.0010	100Mbps speed is NOT supported for the J8177D/JL747A when used in SFP+ on the 6100 Series. J8177D/JL747A does not support link-level flow control on 6100. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A: <ul style="list-style-type: none"> <li>▪ 1990-4640</li> <li>▪ 1990-3816</li> </ul>
6120 Blade Switch Series	498358-B21, 516733-B21	All	
6200yl-24G-mGBIC Switch	J8992A	All	

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
Aruba 6200 Switch Series	All models Only 1G speed supported See Comments	10.04.1000 JL747A (TAA xcvrs): 10.06.0130 and 10.07.0010	100Mbps speed is NOT supported for the J8177D/JL747A when used in SFP on the 6200 Series. J8177D/JL747A does not support link-level flow control on 6200. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul>
Aruba 6300 Switch Series	All models M and F Only 1G speed supported See Comments	10.04.0001 JL747A (TAA xcvrs): 10.07.0005	100Mbps speed is NOT supported for the J8177D or JL747A when used in any SFP56 port on the 6300 Series, or SFP+ port of JL658A or S3L77A (6300L). J8177D or JL747A does not support link-level flow control on 6300. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul> R8S91A and S3L77A: ports 51-52 R8S92A: ports 1-24
	R8S91A, R8S92A	10.10.0002	
	S0E91A, S0X44A(100G models)	Not supported through QSA28 (port does not support 1G speed)	
Aruba 6300L Switch Series	Only S3L77A ports 51-52	10.14.0001	
Aruba 6400 Switch Series	R0X39B, R0X40B R0X41A, R0X42A, R0X43A	10.04.1000 JL747A (TAA xcvrs): 10.06.0001	R0X39A/R0X40A (revision A) are no longer supported for use in the 6400 series 100Mbps speed is NOT supported for the

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
			J8177D or JL747A when used in any port (SFP+, SFP28, or SFP56) on the 6400 series.
	R0X39C, R0X40C R0X41C, R0X42C, R0X43C	J8177C/J8177D, JL747A: 10.09.1000	J8177D or JL747A do not support link-level flow control on 6400.
	R0X44A	10.04.2000 JL747A (TAA xcvrs): 10.06.0001	Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul>
	R0X44C	J8177C/J8177D, JL747A: 10.09.1000	
	S1T83A (24p SR10 4p 100G)	10.13.1000	R0X44A/R0X44C auto-detects the inserted type of transceiver; it does NOT require any <b>interface groups</b> like the 8325.
	S0E48A (32p 25G 4p 100G)	1G not supported	
Aruba 8100 Switch Series	All models	J8177D: 10.12.000x	100Mbps speed is NOT supported for the J8177D or JL474A on the 8100 series.
8200zl Switch Series	J8705A, J8706A	All	
	J9308A	K.14.34	
	J9537A, J9549A, J9535A, J9637A	K.15.02.0004	
Aruba 8320 48p 10G SFP/SFP+ and 6p 40G QSFP+ Switch	JL479A	All JL747A (TAA xcvrs): 10.06.0001	100Mbps speed is NOT supported for the J8177D or JL474A on the 8320 series. J8177D/JL747A does not support link-level flow control on 8320. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A:

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
			<ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul>
Aruba 8325 Switch Series	JL635A displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL624A - Port-to-Power model (FB)</li> <li>▪ JL625A - Power-to-Port model (BF)</li> </ul>	10.03.0030 JL747A (TAA xcvrs): 10.07.0005	100Mbps speed is NOT supported for the J8177D or JL474A or JL747A on the 8325 series. J8177D or JL474A does not support link-level flow control on 8325. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A part numbers: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul> RJ45 transceivers are only supported for use in the top 2 rows of ports (max of 32 per switch). J8177C/D or JL474A will have a delay (~15 secs) before link up or down is properly displayed when a cable is inserted or removed. The 8325 requires configuration of <b>interface groups</b> (groups of 12 ports) to enable the use of 1G or 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details.
Aruba 8360 32Y4C models	JL717A/JL717C(v2) displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL700A/JL700C(v2) Port-to-Power model</li> <li>▪ JL701A/JL701C(v2) Power-to-Port model</li> </ul>	Only on ports 1-16: 10.06.0001 JL747A (TAA xcvrs): 10.07.0005	J8177C/D or JL747A can only operate at 1G in the 8360 series 32Y4C models. J8177C/D or JL747A does not support link-level flow control on 8360. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A part numbers: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul> The 8360 32Y4C model requires configuration of <b>interface groups</b> only for ports 1-4 (as group number 1) to enable the use of 10G transceivers / DACs in the SFP28 ports (Interface Groups default to 25G speed). Ports 1-4 on the 8360 32Y4C model do not support 1G transceivers.

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
			The v2 32Y4C models support MACsec on ports 1-4 only at 10G/25G speeds (50G speed NOT available for ports 2 and 4) All other ports can individually auto-detect the speed of the inserted transceiver. See the Hardware Guides for details.
Aruba 8360 16Y2C models	JL718A/JL718C(v2) displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL702A/JL702C(v2) Port-to-Power model</li> <li>▪ JL703A/JL703C(v2) Power-to-Port model</li> </ul>	Only on ports 1-16: 10.06.0001  JL747A (TAA xcvrs): 10.07.0005	J8177C/D or JL747A can only operate at 1G in the 8360 series 16Y2C models. J8177C/D or JL747A do not support link-level flow control on 8360. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A part numbers: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul> All ports can individually auto-detect the speed of the inserted transceiver.
Aruba 8360 48Y6C models	JL719C displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL704C(v2) Port-to-Power model (FB)</li> <li>▪ JL705C(v2) Power-to-Port model (BF)</li> </ul>	Only on ports 5-48: 10.06.0001 JL747A (TAA xcvrs): 10.07.0005	J8177D or JL747A 10.14.0001 code added support for 100Mbps (full duplex only) using the <b>speed</b> command. 1G in 8360 series 48Y6C models (only on ports 5-48 ports due to MACsec ports 1-4). J8177C/D or JL747A do not support link-level flow control on 8360. Only the following 4x4 part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A 4x4 part numbers: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul> All ports can individually autodetect the speed of the inserted transceiver.
Aruba 8360 48XT4C models	JL720A/JL720C(v2) displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL706A/JL706C(v2) Port-to-Power model</li> <li>▪ JL707A/JL707C(v2) Power-to-Port model</li> </ul>	J8177D not applicable	No SFP+ ports available



SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
Aruba 8360 12C models	JL721A/JL721C(v2) displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL708A/JL708C(v2) Port-to-Power model</li> <li>▪ JL709A/JL709C(v2) Power-to-Port model</li> </ul>	J8177D not applicable	No SFP+ ports available
Aruba 8360 24XF2C models	JL722A/JL722C(v2) displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ JL710A/JL710C(v2) Port-to-Power model</li> <li>▪ JL711A/JL711C(v2) Power-to-Port model</li> </ul>	Only on ports 1-24: 10.06.0001 JL747A (TAA xcvs): 10.07.0005	J8177C/D or JL747A can only operate at 1G in the 8360 series 24XF2C models. J8177C/D or JL747A do not support link-level flow control on 8360. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul>
Aruba 8400X Modules	JL363A JL687A	10.00.0018 10.04.2000 JL474A (TAA xcvs): 10.07.0005	J8177C/D or JL747A can only operate at 1G in the 8400 series. J8177D does not support link-level flow control on 8400. Only the following part numbers are supported: J8177C/J8177D: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4606</li> <li>▪ 1990-4640</li> </ul> JL747A: <ul style="list-style-type: none"> <li>▪ 1990-3816</li> <li>▪ 1990-4640</li> </ul> JL687A notes: The 25G module (JL687A) requires configuration of <b>interface groups</b> (groups of four ports) to enable use of 1G or 10G transceivers or DACs in the SFP28 ports (Interface Groups default to 25G speed). See the Hardware Guides for details. The link state of ports on the JL687A module will always show UP if a transceiver is inserted and the interface is enabled, even if the cable is disconnected
Aruba 10000 Switch Series	R8S96A displayed by CLI ( <code>show system</code> ) <ul style="list-style-type: none"> <li>▪ R8P13A - 48Y6C FB</li> </ul>	J8177D: 10.10.0002	Only the J8177D is supported (J8177C not supported). J8177D or JL747A can only operate at 1G in the 10000 series.

SFP (1G) Copper capable Product name	SKU	Minimum software required (J8177C/J8177D)	Comments
	bundle <ul style="list-style-type: none"> <li>▪ R8P14A - 48Y6C BF bundle</li> </ul>		The 10000 series requires configuration of interface groups (groups of 4 ports) to enable the use of 1G or 10G transceivers/DACs in the SFP28 ports (set the speed to 25g for the default). See the <i>Hardware Guides</i> for details.

Aruba now supports select HPE Server and Systems interconnect products.

- This chapter summarizes the various interconnect products tested and verified to work with selected Aruba switches. NOT all Aruba switches are certified with HPE Server and Storage Systems products
- The term “HPE” products covers interconnect products sold by the HPE Servers and Systems division or HPE Storage Division. Aruba is a separate division within HPE.
- Aruba products are NOT the same as HPE products of the same speed support. They have different ordering part numbers and in many instances are of slightly different designs, requiring specific changes to the software drivers on either Switch or HPE Interconnect product (network adapters, or host-native ethernet port). For example, both divisions may sell a 10G DAC cable. However, the part incorporates an encoded part number specific for either Aruba or HPE and they are not the same. Steps must be taken to provide specific ‘tuning’ to allow the slightly different parts to provide proper support.
- An HPE only partner is not authorized to purchase Aruba Product Line SKUs, likewise, an Aruba only partner is not authorized to purchase HPE Server and Storage SKUs.
  - To allow HPE Resellers to quote Aruba specific switches and interconnect products, a different set of SKU (stock keeping unit) ordering numbers have been created. This set of SKU #s point to an Aruba part. The 1:1 relationship of these part numbers is covered later in this chapter.
  - The support of Aruba parts are covered in this Guide,
    - Support coverage of the HPE ordering SKU for a particular HPE Server product is covered by the information contained in this document at hpe.com: [HPE Compute transceiver and cable hardware matrix](#).
    - Support information for HPE product ordering SKU #s for a particular HPE Storage products are covered by the [SPOCK](#) (Single Point of Connectivity Knowledge for HPE Storage Products) – requires an HPE Passport Login account to access. Search for “Aruba” on the SPOCK Home page.

Support of HPE products includes interoperability of HPE products with the following Aruba switches:

- Aruba 6300M 48G Pwr2Prt 2F 1PS Bundle (JL762A) – used as an Out Of Band Management (OOBM) 1G switch, usually to connect server ILO ports to the network. Other 6300M (or F) series are not in particular the focus of pairing with HPE Servers and Systems.
- Aruba 8320, 8325, 8360 and 10000 series. Purchased in either Front-to-Back or Back-to-Front airflow pre-configured bundles. The ‘bundles’ are ordered with a particular SKU (stock keeping unit) part number, but each are comprised of the same base switch model – (with a different SKU #).

The following devices were tested against 9300 Switch series with AOS-CX 10.10.1000 and enable the listed use cases. The server adapters are supported by the HPE Server division.

The HPE Storage NICs below were tested with the 9300 series.

The SKUs shown are the Aruba SKU, along with the HPE ordered SKU; for more details see the [HPE servers and systems support](#) section.

HPE Storage and Server partners should use the “HPE” SKU to obtain the Aruba SKU item.

**Devices tested against the 9300 Switch Series**

HPE Server SKU#	Description	Use case with 9300 32D series Aruba SKU# (HPE SKU#)
P10180-B21	MLX MCX623105AS 200GbE 1p QSFP56 Adptr	<b>QDD to 2x QSFP56 200G AOC</b> R9B55A(S1D30A)[3m], R9B53A(S1D31A)[7m], R9B57A(S1D32A)[15m], R9B56A(S1D33A)[30m], R9B54A(S1D34A)[50m]
P25960-B21	MLX MCX623106AS 100GbE 2p QSFP56 NIC  This is a QSFP56 NIC (compatible to use either QSFP28 or QSFP56 parts)	<b>QDD to 4x QSFP56 100G AOC</b> R9B50A(S1D35A)[3m], R9B48A(S1D36A)[7m], R9B52A(S1D37A)[15m], R9B51A(S1D38A)[30m], R9B49A(S1D39A)[50m]  <b>QDD to 2xQSFP28 100G AOC</b> R9B60A(S1D25A)[3m], R9B58A(S1D26A)[7m], R9B62A(S1D27A)[15m], R9B61A(S1D28A)[30m], R9B59A(S1D29A)[50m]  <b>400G QDD to 2xQSFP28 100G Optical Breakout</b> R9B41A(S1D18A)[SR8 xcvr] to 2x R9F75A(JL309A)[SR4] (MPO16 MMF breakout to 2x MPO12 (8 fibers each))  <b>400G QDD eDR4 to 4xQSFP28 FR1 100G Optical Breakout</b> R9B42A(S1D19A)[eDR4 xcvr] to 4x R9B63A(S1D17A)[FR1 xcvr] (MPO12 SMF breakout to 4x LC (2 fibers each))
P21927-B21	HPE 100GbE 2P QSFP28 MCX516A-CCHT Adptr	<b>QDD to 2xQSFP28 100G AOC</b> R9B60A(S1D25A)[3m], R9B58A(S1D26A)[7m], R9B62A(S1D27A)[15m], R9B61A(S1D28A)[30m], R9B59A(S1D29A)[50m]  <b>400G QDD to 2xQSFP28 100G Optical Breakout</b> R9B41A(S1D18A)[SR8 xcvr] to 2x R9F75A(JL309A)[SR4] (MPO16 MMF breakout to 2x MPO12 (8 fibers each))  <b>400G QDD eDR4 to 4xQSFP28 FR1 100G Optical Breakout</b> R9B42A(S1D19A)[eDR4 xcvr] to 4x R9B63A(S1D17A)[FR1 xcvr] (MPO12 SMF breakout to 4x LC (2 fibers each))

**Devices with known issues tested against the 9300 Switch Series**

HPE Server SKU#	Description	Use case with 9300 32D series
874253-B21	HPE Eth 100Gb 1p 842QSFP28 Adptr	<b>QDD to 2xQSFP28 100G AOC</b> R9B60A(S1D25A)[3m], R9B58A(S1D26A)[7m], R9B62A(S1D27A)[15m], R9B61A(S1D28A)[30m], R9B59A(S1D29A)[50m]  <b>400G QDD to 2xQSFP28 100G Optical Breakout</b> R9B41A(S1D18A)[SR8 xcvr] to 2x R9F75A(JL309A)[SR4] (MPO16 MMF breakout to 2x MPO12 (8 fibers each)) Known issue with R9B63A(FR1 xcvr): AOSCX-229645 when used in this Adapter

HPE Server SKU#	Description	Use case with 9300 32D series
P21112-B21	INT E810 100GbE 2p QSFP28 Adptr	<p><b>QDD to 2xQSFP28 100G AOC</b> R9B60A(S1D25A)[3m], R9B58A(S1D26A)[7m], R9B62A(S1D27A)[15m], R9B61A(S1D28A)[30m], R9B59A(S1D29A)[50m]</p> <p><b>400G QDD to 2xQSFP28 100G Optical Breakout</b> R9B41A(S1D18A)[SR8 xcvr] to 2x R9F75A(JL309A)[SR4] (MPO16 MMF breakout to 2x MPO12 (8 fibers each))</p> <p>Known issue with R9B63A(FR1 xcvr 1990-4826): AOSCX-229643 when used in this Adapter</p>
P22767-B21	INT E810 100GbE 2p QSFP28 OCP3 Adptr	<p><b>QDD to 2xQSFP28 100G AOC</b> R9B60A(S1D25A)[3m], R9B58A(S1D26A)[7m], R9B62A(S1D27A)[15m], R9B61A(S1D28A)[30m], R9B59A(S1D29A)[50m]</p> <p><b>400G QDD to 2xQSFP28 100G Optical Breakout</b> R9B41A(S1D18A)[SR8 xcvr] to 2x R9F75A(JL309A)[SR4] (MPO16 MMF breakout to 2x MPO12 (8 fibers each))</p> <p>Known issue with R9B63A(FR1 xcvr 1990-4826): AOSCX-229643 when used in this Adapter</p>
P37690-B21	<p>Pensando DSP DSC-100 Ent 100G QSFP28 Card</p> <p>Note: This module has been end of sale as of Dec 2022</p>	<p><b>QDD to 2xQSFP28 100G AOC</b> R9B60A(S1D25A)[3m], R9B58A(S1D26A)[7m], R9B62A(S1D27A)[15m], R9B61A(S1D28A)[30m], R9B59A(S1D29A)[50m]</p> <p><b>400G QDD to 2xQSFP28 100G Optical Breakout</b> R9B41A(S1D18A)[SR8 xcvr] to 2x R9F75A(JL309A)[SR4] (MPO16 MMF breakout to 2x MPO12 (8 fibers each))</p> <p>Known issue with R9B63A(FR1 xcvr 1990-4826): AOSCX-229643 when used in this Adapter</p>

**100Gb HPE Server adapters tested against 10000, 8325, 8360v1 and 8360v2 Switch Series**

HPE SKU	SKU Description
874253-B21	HPE Eth 100Gb 1p 842QSFP28 Adptr
P21927-B21	HPE 100GbE 2P QSFP28 MCX516A-CCHT Adptr
Aruba is aware of the following known issues:	
P25960-B21	<p>MLX MCX623106AS 100GbE 2p QSFP56 Adptr*</p> <p>* Intermittent issues seen with 8360/6400 models when using 3m and 5m DACs (JL307A and R0Z26A) (AOSCX-231260, AOSCX-218043, AOSCX-171162)</p>

The following devices were tested against 10000, 8325, 8360v1 and 8360v2 Switch series with AOS-CX 10.09, and 6400 and 6300 Switch series with AOS-CX 10.08.

### 10/25Gb HPE Server adapters tested

HPE SKU #	SKU Description	Issue
817749-B21	HPE Ethernet 10/25Gb 2-port 640FLR-SFP28 Adapter	Known issue when using Mellanox FW 14.27 or higher with 4x10G Breakout DAC (721064-B21): (AOSCX-172421)
817753-B21	HPE Ethernet 10/25Gb 2-port 640SFP28 Adapter	Known issue when using Mellanox FW 14.27 or higher with 4x10G Breakout DAC (721064-B21): (AOSCX-172421)
867334-B21	HPE Ethernet 10/25Gb 2-port 622FLR-SFP28 CAN	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162)
867328-B21	HPE Ethernet 10/25Gb 2-port 621SFP28 Adapter	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162)
817709-B21	HPE Ethernet 10/25Gb 2-port 631FLR-SFP28 Adapter	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162)
817718-B21	HPE Ethernet 10/25Gb 2-port 631SFP28 Adapter	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162)
870825-B21	HPE Eth 10/25Gb 2p 661SFP28 Adptr	No AOCs currently supported. The use of DACs is preferred on this NIC. (AOSCX-153015)
P26966-B21	Pensando DSP DSC-25 10/25G 2p SFP28 Card	Known issue with Pensando FW 1.28.2-E-93 or lower. Some interfaces will fail to link up on

HPE SKU #	SKU Description	Issue
		the lower rows of 8360/6400/6300 units. (AOSCX-170735, AOSCX-160057)
P26262-B21	BCM 57414 10/25GbE 2p SFP28 Adptr	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162)
P10115-B21	BCM 57414 10/25GbE 2p SFP28 OCP3 Adptr	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162)
P24437-B21	XIL X2522-25G 10/25GbE 2p SFP28 Adptr	ROM44A, ROM45A R0Z21A AOCs require FEC ("error-control") = none: (AOSCX-192121)
P22702-B21	MRV QL41232HLCU 10/25GbE 2p SFP28 Adptr	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162) s.
P10118-B21	MRV QL41232 10/25GbE 2p SFP28 OCP3 Adptr	Intermittent issues seen with 8360/6300/6400 models when using 25G DACs. (844477-B21, 844480-B21, JL487A, JL488A, JL489A) The use of AOCs is preferred in these NICs (ROM44A, ROM45A R0Z21A). (AOSCX-218043, AOSCX-171162).
P13188-B21	MLX MCX512F 10/25GbE 2p SFP28 Adptr	Intermittent issues seen with 25G AOCs (ROM44A, ROM45A R0Z21A) The use of DACs (844477-B21, 844480-B21, JL487A, JL488A, JL489A) is preferred on this NIC. (AOSCX-175875)
P10112-B21	MLX MCX562A 10/25GbE 2p SFP28 OCP3 Adptr	Intermittent issues seen with 25G AOCs (ROM44A, ROM45A R0Z21A) The use of DACs

HPE SKU #	SKU Description	Issue
		(844477-B21, 844480-B21, JL487A, JL488A, JL489A) is preferred on this NIC. (AOSCX-175875)

**10Gb SFP+ HPE Server adapters tested**

HPE SKU #	SKU Description
P11338-B21	HPE Ethernet10Gb2-port548SFP+ Adapter** **This SKU has gone end of sale
P08446-B21	HPE Ethernet 10Gb 2-port 524SFP+ Adapter
727055-B21	HPE Ethernet 10Gb 2-port 562SFP+ Adapter
727054-B21	HPE Ethernet 10Gb 2-port 562FLR-SFP+ Adapter
700751-B21	HPE FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter
652503-B21	HPE Ethernet 10Gb 2-port 530SFP+ Adapter
656596-B21	HPE Ethernet 10Gb 2-port 530T Adapter
700759-B21	HPE FlexFabric 10Gb 2-port 533FLR-T Adapter
817745-B21	HPE Ethernet 10Gb 2-port 562FLR-T Adapter
817738-B21	HPE Ethernet 10Gb 2-port 562T Adapter
817721-B21	HPE Ethernet 10Gb 2-port 535FLR-T Adapter
813661-B21	HPE Ethernet 10Gb 2-port 535T Adapter

**10Gb Base-T HPE Server adapters tested**

HPE SKU #	SKU Description
656596-B21	HPE Ethernet10Gb2-port530TAdapter
700759-B21	HPE FlexFabric10Gb 2-port 533FLR-TAdapter
817745-B21	HPE Ethernet10Gb2-port562FLR-T Adapter
817738-B21	HPE Ethernet10Gb2-port562TAdapter



### HPE DACs, breakout DACs, AOCs, and breakout fiber cables

CableType	HIT SKU #	Description
<b>Same speed DACs and AOCs</b>		
25G to 25G	844477-B21	HPE 25Gb SFP28 to SFP28 3m DAC
	844480-B21	25G SFP28
10G to 10G	487655-B21	HPE BLc 10G SFP+ SFP+ 3m DAC Cable
	537963-B21	HPE BLc 10G SFP+ SFP+ 5m DAC Cable
<b>Breakout DACs and AOCs</b>		
100G to 4x25G DAC	845416-B21	HPE100G QSFP28 to4x25G SFP28 3mDAC
100G to 4x25G AOC	845420-B21	HPE QSFP28 to 4x25G SFP28 7m AOC
	845424-B21	HPE QSFP28 to 4x25G SFP28 15m AOC
100G to 4x25G DAC	845416-B21	HPE 100Gb QSFP28 to 4x25Gb SFP28 3m DAC
40G to 4x10GDAC	721064-B21	HPE BLc 40G QSFP+ to 4x10G SFP+ 3m DAC Cbl
40G to 4x10G AOC	721076-B21	HPE BLc QSFP+ to 4x10G SFP+ 15m AOC
<b>Breakout Fiber cables (see breakout optical cables)</b>		
SR4/eSR4 or 100G SR4 transceivers	K2Q46A	HPE MPO to 4 xLC 5m Cable
	K2Q47A	HPE MPO to 4x LC 15m Cable



Other HPE cables not listed have not been validated against any Aruba Switch. Check the compatibility tables in this guide to determine if a HPE Server Cable is supported for use with the Aruba Switch.

## Aruba data center networking solution for HPE

The table below shows the HPE SKU and Description, and its like-for-like Aruba SKU and Description. An HPE SKU is used by customers who were sold Aruba products as part of their HPE solution, while an Aruba SKU is used by customers who were sold Aruba products as part of an Aruba solution. Both HPE SKU and Aruba SKU, are the same as shown in the table. Support and Serial Number information will be registered under the Aruba SKU.

HPE Resellers should use the "HPE SKU" (stock keeping unit) to obtain the Aruba product. Alert your shipping department that the invoice information may reflect the HPE SKU# while the contents of the package will contain the Aruba item. The table is sorted by HPE SKUs.

**Aruba Data Center Networking Solution for HPE**

HPE SKU	HPE Description	Aruba SKU	Aruba Description
R9F74A	Aruba 100G QSFP28-QSFP28 3m DAC for HPE	JL307A	Aruba 100G QSFP28-QSFP28 3m DAC Cable
R9F75A	HPE DC 100G QSFP28 MPO SR4 MMF XCVR	JL309A	Aruba 100G QSFP28 MPO SR4 MMF XCVR
R9F76A	Aruba 100G QSFP28 to QSFP28 2m AOC HPE	JL856A	Aruba 100G QSFP28 to QSFP28 2m AOC
R9F77A	Aruba 100G QSFP28 to QSFP28 1m DAC HPE	R0Z25A	Aruba 100G QSFP28 to QSFP28 1m DAC Cable
R9F78A	Aruba 100G QSFP28 to QSFP28 5m DAC HPE	R0Z26A	Aruba 100G QSFP28 to QSFP28 5m DAC Cable
R9F79A	Aruba 100G QSFP28 to QSFP28 7m AOC HPE	R0Z27A	Aruba 100G QSFP28 to QSFP28 7m AOC
R9F80A	Aruba 100G QSFP28 to QSFP28 15m AOC HPE	R0Z28A	Aruba 100G QSFP28 to QSFP28 15m AOC
R9F81A	Aruba 100G QSFP28 to QSFP28 30m AOC HPE	R0Z29A	Aruba 100G QSFP28 to QSFP28 30m AOC
R9F82A	Aruba 10G SFP+ LC SR 300m MMF XCVR HPE	J9150D	Aruba 10G SFP+ LC SR 300m MMF XCVR
R9F83A	Aruba 10G SFP+ to SFP+ 1m DAC for HPE	J9281D	Aruba 10G SFP+ to SFP+ 1m DAC Cable
R9F84A	Aruba 10G SFP+ to SFP+ 3m DAC for HPE	J9283D	Aruba 10G SFP+ to SFP+ 3m DAC Cable
R9F85A	Aruba 10GBASE-T SFP+ 30m Cat6A XCVR HPE	JL563B	Aruba 10GBASE-T SFP+ RJ45 30m Cat6A XCVR
R9F86A	Aruba 1G SFP LC SX 500m MMF XCVR for HPE	J4858D	Aruba 1G SFP LC SX 500m MMF XCVR
R9F87A	Aruba 1G SFP RJ45 T 100m Cat5e XCVR HPE	J8177D	Aruba 1G SFP RJ45 T 100m Cat5e XCVR
R9F88A	Aruba 100M SFP LC FX 2km MMF XCVR HPE	J9054D	Aruba 100M SFP LC FX 2km MMF XCVR
R9F89A	Aruba 25G SFP28 LC SR 100m MMF XCVR HPE	JL484A	Aruba 25G SFP28 LC SR 100m MMF XCVR
R9F90A	Aruba 25G SFP28 LC eSR 400m MMF XCVR HPE	JL485A	Aruba 25G SFP28 LC eSR 400m MMF XCVR
R9F91A	Aruba 25G SFP28 to SFP28 0.65m DAC HPE	JL487A	Aruba 25G SFP28 to SFP28 0.65m DAC Cable
R9F92A	Aruba 25G SFP28 to SFP28 3m DAC for	JL488A	Aruba 25G SFP28 to SFP28 3m DAC

HPE SKU	HPE Description	Aruba SKU	Aruba Description
	HPE		Cable
R9F93A	Aruba 25G SFP28 to SFP28 5m DAC for HPE	JL489A	Aruba 25G SFP28 to SFP28 5m DAC Cable
R9F94A	Aruba 25G SFP28 to SFP28 3m AOC for HPE	R0M44A	Aruba 25G SFP28 to SFP28 3m AOC
R9F95A	Aruba 25G SFP28 to SFP28 7m AOC for HPE	R0M45A	Aruba 25G SFP28 to SFP28 7m AOC
R9F96A	Aruba 25G SFP28 to SFP28 15m AOC for HPE	R0Z21A	Aruba 25G SFP28 to SFP28 15m AOC
R9F97A	Aruba 40G QSFP+ MPO SR4 XCVR for HPE	JH231A	HPE X142 40G QSFP+ MPO SR4 Transceiver
R9F98A	Aruba 40G QSFP+ MPO eSR4 300M XCVR HPE	JH233A	HPE X142 40G QSFP+ MPO eSR4 300M XCVR
R9F99A	Aruba 40G QSFP+ to QSFP+ 1m DAC for HPE	JH234A	HPE X242 40G QSFP+ to QSFP+ 1m DAC Cable
R9G00A	Aruba 40G QSFP+ to QSFP+ 3m DAC for HPE	JH235A	HPE X242 40G QSFP+ to QSFP+ 3m DAC Cable
R9G01A	Aruba 40G QSFP+ to QSFP+ 5m DAC for HPE	JH236A	HPE X242 40G QSFP+ to QSFP+ 5m DAC Cable
R9G02A	Aruba 40G QSFP+LC BiDi 150m MMF XCVR HPE	JL308A	Aruba 40G QSFP+ LC BiDi 150m MMF XCVR
R9G03A	Aruba 40G QSFP+ to QSFP+ 7m AOC for HPE	R0Z22A	Aruba 40G QSFP+ to QSFP+ 7m AOC
R9G04A	Aruba 40G QSFP+ to QSFP+ 15m AOC for HPE	R0Z23A	Aruba 40G QSFP+ to QSFP+ 15m AOC
R9G05A	Aruba 40G QSFP+ to QSFP+ 30m AOC for HPE	R0Z24A	Aruba 40G QSFP+ to QSFP+ 30m AOC
R9G06A	Aruba 50G SFP56 to SFP56 0.65m DAC HPE	R0M46A	Aruba 50G SFP56 to SFP56 0.65m DAC Cable
R9G07A	Aruba 50G SFP56 to SFP56 3m DAC for HPE	R0M47A	Aruba 50G SFP56 to SFP56 3m DAC Cable
R9Q43A	Aruba 1G SFP LC SX 500m MMF TAA XCVR HPE	JL745A	Aruba 1G SFP LC SX 500m MMF TAA Transceiver
R9Q44A	Aruba 1G SFP LC LX 10km SMF TAA XCVR HPE	JL746A	Aruba 1G SFP LC LX 10km SMF TAA Transceiver
R9Q45A	Aruba 1GBASET SFP 100m Cat5e TAA TRX HPE	JL747A	Aruba 1G SFP RJ45 T 100m Cat5e TAA Transceiver

HPE SKU	HPE Description	Aruba SKU	Aruba Description
R9Q46A	Aruba 10G SFP+ SR 300m MMF TAA XCVR HPE	JL748A	Aruba 10G SFP+ LC SR 300m MMF TAA Transceiver
R9Q47A	Aruba 10G SFP+ LR 10km SMF TAA XCVR HPE	JL749A	Aruba 10G SFP+ LC LR 10km SMF TAA Transceiver
S1D17A	Aruba 100G QSFP28 FR1 SMF 2km XCVR HPE	R9B63A	Aruba 100G QSFP28 LC FR1 2km SMF XCVR
S1D18A	Aruba 400G QSFP-DD SR8 100m MMF XCVR HPE	R9B41A	Aruba 400G Q-DD MPO16 SR8 100m MMF XCVR
S1D19A	Aruba 400G QSFP-DD eDR4 2km SMF XCVR HPE	R9B42A	Aruba 400G Q-DD MPO12 eDR4 2km SMF XCVR
S1D20A	Aruba 400G QSFP-DD to DD 3m AOC for HPE	R9B45A	Aruba 400G Q-DD to Q-DD 3m AOC
S1D21A	Aruba 400G QSFP-DD to DD 7m AOC for HPE	R9B43A	Aruba 400G Q-DD to Q-DD 7m AOC
S1D22A	Aruba 400G QSFP-DD to DD 15m AOC for HPE	R9B47A	Aruba 400G Q-DD to Q-DD 15m AOC
S1D23A	Aruba 400G QSFP-DD to DD 30m AOC for HPE	R9B46A	Aruba 400G Q-DD to Q-DD 30m AOC
S1D24A	Aruba 400G QSFP-DD to DD 50m AOC for HPE	R9B44A	Aruba 400G Q-DD to Q-DD 50m AOC
S1D25A	Aruba 200G DD-2xQSFP28 100G 3m AOC HPE	R9B60A	Aruba 200G Q-DD to 2xQSFP28 100G 3m AOC
S1D26A	Aruba 200G DD-2xQSFP28 100G 7m AOC HPE	R9B58A	Aruba 200G Q-DD to 2xQSFP28 100G 7m AOC
S1D27A	Aruba 200G DD-2xQSFP28 100G 15m AOC HPE	R9B62A	Aruba 200G Q-DD to 2xQSFP28 100G 15m AOC
S1D28A	Aruba 200G DD-2xQSFP28 100G 30m AOC HPE	R9B61A	Aruba 200G Q-DD to 2xQSFP28 100G 30m AOC
S1D29A	Aruba 200G DD-2xQSFP28 100G 50m AOC HPE	R9B59A	Aruba 200G Q-DD to 2xQSFP28 100G 50m AOC
S1D30A	Aruba 400G DD-2xQSFP56 200G 3m AOC HPE	R9B55A	Aruba 400G Q-DD to 2xQSFP56 200G 3m AOC
S1D31A	Aruba 400G DD-2xQSFP56 200G 7m AOC HPE	R9B53A	Aruba 400G Q-DD to 2xQSFP56 200G 7m AOC
S1D32A	Aruba 400G DD-2xQSFP56 200G 15m AOC HPE	R9B57A	Aruba 400G Q-DD to 2xQSFP56 200G 15m AOC
S1D33A	Aruba 400G DD-2xQSFP56 200G 30m AOC HPE	R9B56A	Aruba 400G Q-DD to 2xQSFP56 200G 30m AOC

HPE SKU	HPE Description	Aruba SKU	Aruba Description
S1D34A	Aruba 400G DD-2xQSFP56 200G 50m AOC HPE	R9B54A	Aruba 400G Q-DD to 2xQSFP56 200G 50m AOC
S1D35A	Aruba 400G DD-4xQSFP56 100G 3m AOC HPE	R9B50A	Aruba 400G Q-DD to 4xQSFP56 100G 3m AOC
S1D36A	Aruba 400G DD-4xQSFP56 100G 7m AOC HPE	R9B48A	Aruba 400G Q-DD to 4xQSFP56 100G 7m AOC
S1D37A	Aruba 400G DD-4xQSFP56 100G 15m AOC HPE	R9B52A	Aruba 400G Q-DD to 4xQSFP56 100G 15m AOC
S1D38A	Aruba 400G DD-4xQSFP56 100G 30m AOC HPE	R9B51A	Aruba 400G Q-DD to 4xQSFP56 100G 30m AOC
S1D39A	Aruba 400G DD-4xQSFP56 100G 50m AOC HPE	R9B49A	Aruba 400G Q-DD to 4xQSFP56 100G 50m AOC

These are products available from the HPE Storage Business Unit. They were enabled on select Aruba Switches to assist in Storage led engagements.

- Switches NOT specified are possibly enabled via UT-Mode – See Unsupported Transceiver in the Overview chapter for caveats).
- Where noted, SFP product may require the use of a QSFP28-to-SFP28 Adapter (QSA28).
- The Minimum Software where the support has been fully vetted and should not report the use of the item as an “unsupported transceiver”.

Previous CX releases may enable the product, but report it as “unsupported transceiver”.

These products may only be available to resellers authorized to sell HPE Storage products and not available to Aruba-only resellers.

These items are documented as “supported” by referencing the [SPOCK](#) (Single Point of Connectivity Knowledge) maintained by the HPE Storage Business Unit and this guide.

These HPE Storage products are listed here as a group, indicating the Aruba Switches they are supported on, and the minimum release of software that will recognize them, rather than in the preceding chapters based on product speed. If used on an earlier version of AOS-CX, the products below may be identified as an “unsupported transceiver” and may or may not operate properly.

Where indicated, a QSA28 – the QSFP28 to SFP28 Adapter may be required (see the [QSFP28 to SFP28 adapter support](#) chapter).

### **Aruba data center networking solution for HPE**

SKU	Base product description	Requirement Reference #	SPOCK Certification	8325 (Min Release)	9300 32D (Min Release)
Q6M30A	HPE M-series 10GbE SFP+ SR 300m xcvr	REQ-16622	Y	Yes (10.12.000x)	No. QSA28 is not yet supported on the 9300-32D.
455883-B21	HPE BLc 10G SFP+ SR Transceiver	REQ-16624	Y	Yes (10.13.000x)	No. QSA28 is not yet supported on the 9300-32D.
JD095C	HPE X240 10G SFP+ SFP+ 0.65m DAC Cable	REQ-16624	Y	Yes (10.13.000x)	No

SKU	Base product description	Requirement Reference #	SPOCK Certification	8325 (Min Release)	9300 32D (Min Release)
R0R42A	HPE 25Gb SFP28 SR 30m xcvr	REQ-16622	Y	Yes (10.12.000x)  If used in a QSA28, will report as "unsupported".	No. QSA28 is not yet supported on the 9300-32D.
Q2P64B	HPE 25Gb SFP28 SW E Temp 1-pack PT xcvr	REQ-16624	Y	Yes (10.13.000x)  If used in a QSA28, will report as "unsupported".	No. QSA28 is not yet supported on the 9300-32D.
Q2P65A	HPE 10Gb SFP+ SW E Temp 1-pack PT xcvr	REQ-16624	Y	Yes (10.13.000x)  If used in a QSA28, will report as "unsupported".	No. QSA28 is not yet supported on the 9300-32D.
K2Q21A	HPE C-series 3M Passive Copper SFP+ Cbl DAC	REQ-16622	Y	Yes (10.12.000x)  If used in a QSA28, will report as "unsupported".	No. QSA28 is not yet supported on the 9300-32D.
K2Q22A	HPE C-series 5M Passive Copper SFP+ Cbl DAC	REQ-16622	Y	Yes (10.12.000x)  If used in a QSA28, will report as "unsupported".	No. QSA28 is not yet supported on the 9300-32D.
R4G18A	HPE M-series 25Gb SFP28/SFP28 0.5m DAC	REQ-16624	Y	Yes (10.13.000x)  If used in a QSA28, will report as "unsupported".	No
Q9S66A	HPE 40GbE QSFP+ to 4x10GbE SFP+ 5m AOC	REQ-16624	Y	Yes (10.13.000x)	No
R4G19A	HPE M-series 25Gb SFP28/SFP28 1m DAC	REQ-16622	Y	Yes (10.12.000x)  If used in a QSA28, will	No. QSA28 is not yet supported

SKU	Base product description	Requirement Reference #	SPOCK Certification	8325 (Min Release)	9300 32D (Min Release)
				report as "unsupported".	on the 9300-32D.
Q9S69A	HPE 25GbE SFP28 to SFP28 10m Smart AOC	REQ-16622	Y	Yes (10.12.000x)	No. QSA28 is not yet supported on the 9300-32D.
Q9S70A	HPE 25GbE SFP28 to SFP28 15m Smart AOC	REQ-16624	Y	Yes (10.13.000x)	No. QSA28 is not yet supported on the 9300-32D.
Q9S67A	HPE 25GbE SFP28 to SFP28 3m Smart AOC	REQ-16622	Y	Yes (10.12.000x)	No. QSA28 is not yet supported on the 9300-32D.
Q9S68A	HPE 25GbE SFP28 to SFP28 5m Smart AOC	REQ-16622	Y	Yes (10.12.000x)	No. QSA28 is not yet supported on the 9300-32D.
Q7F11A (SKU has been End of Sale)	HPE M-series 40GbE QSFP28 SR4 100m xcvr	REQ-16622	Y	Yes (10.12.000x)	No Q7F11A has been end of sale by the HPE Storage group(Vendor EOS).
R8M61A	HPE 100GbE QSFP28 LC DR1 500m 1pk xcvr	REQ-16622	Y	Yes (10.12.000x)	No
Q2F19A	HPE M-series 100GbE QSFP28 SR4 100m xcvr	REQ-16622	Y	Yes (10.12.000x)	No
Q8J73A	HPE M-series 100GbE QSFP28 PSM4 500m xcvr	REQ-16624	Y	Yes (10.13.000x)	Yes 10.13.100x
R0R40A	HPE 100Gb QSFP28 LC	REQ-16624	Y	Yes (10.13.000x)	No (TBD)



SKU	Base product description	Requirement Reference #	SPOCK Certification	8325 (Min Release)	9300 32D (Min Release)
	SWDM4 MM 100m xcvr				
Q9S72A	HPE 100GbE QSFP28 to 4x25GbE 1m DAC	REQ-16624	Y	Yes (10.13.000x)	No (TBD)
Q9S71A	HPE 100GbE QSFP28 to QSFP28 5m AOC	REQ-16624	Y	Yes (10.13.000x)	No (TBD)
R8M44A	HPE 400GbE QSFP-DD to QSFP-DD 0.5m Direct Attach Copper Cable	REQ-58354	Y	N/A	Yes (10.13.100x)
R8M45A	HPE 400GbE QSFP-DD to QSFP-DD 1m Direct Attach Copper Cable	REQ-58354	Y	N/A	Yes (10.13.100x)
R8M46A	HPE 400GbE QSFP-DD to QSFP-DD 2m Direct Attach Copper Cable	REQ-58354	Y	N/A	Yes (10.13.100x)
R8M47A	HPE 400GbE QSFP-DD to QSFP-DD 5m Active Optical Cable	REQ-58354	Y	N/A	Yes (10.13.100x)
R8M48A	HPE 400GbE QSFP-DD to QSFP-DD 15m Active Optical Cable	REQ-58354	Y	N/A	Yes (10.13.100x)
R8M49A	HPE 400GbE QSFP-DD to 2xQSFP56 5m Active Optical Cable	REQ-58354	Y	N/A	10.14.0001
R8M50A	HPE 400GbE QSFP-DD to 2xQSFP56 15m Active Optical Cable	REQ-58354	Y	N/A	10.14.0001
R8M51A	HPE 400GbE QSFP-DD to 2xQSFP56 1m Direct Attach Cable	REQ-4541	Y	N/A	No
R8M52A	HPE 400GbE QSFP-DD to 2xQSFP56 2m Direct Attach Cable	REQ-4541	Y	N/A	No

SKU	Base product description	Requirement Reference #	SPOCK Certification	8325 (Min Release)	9300 32D (Min Release)
R8M53A	HPE 400GbE QSFP-DD to 8xSFP56 2m Direct Attach Copper Cable	TBD	TBD	N/A	No
R8M55A	HPE 400GbE QSFP-DD to 4xQSFP28 1m Direct Attach Copper Cable	REQ-4541	Y	N/A	No. Despite the description, this is really a QSFP56 and will not connect in a QSFP28 port.
R8M56A	HPE 400GbE QSFP-DD to 4xQSFP28 2m Direct Attach Copper Cable	REQ-4541	Y	N/A	No. Despite the description, this is really a QSFP56 and will not connect in a QSFP28 port.
R8M60A	HPE 400GbE QSFP-DD MPO DR4 500m Transceiver	REQ-58354	Y	N/A	<p>Yes (10.13.100x) NOTE: when the R9M60A transceiver is used in a 9300 32D BF model (R9A30A) and a failed fan occurs, the operating temperature is derated by 5C (max of 30C, not 35C).</p> <p>The FB model (R9A29A) can tolerate a single failed fan up to the stated operating temp of 45C.</p> <p>Both models derate 1C for every 1000ft</p>

SKU	Base product description	Requirement Reference #	SPOCK Certification	8325 (Min Release)	9300 32D (Min Release)
					above Sea Level - up to 10,000ft (3km).
R8M62A	HPE 400GbE QSFP-DD MPO BD/SR4.2 100m Transceiver	REQ-58354	Y	N/A	Yes (10.13.100x)
R8M63A	HPE 400GbE QSFP-DD REQ-70688	REQ-70688	Y	N/A	10.14.0001
R8M64A	HPE 400GbE QSFP-DD LC FR4 2km Transceiver	REQ-58354	Y	N/A	Yes (10.13.100x)
R5Z84A	HPE 200Gb QSFP56 LC CWDM4 FR4 xcvr	REQ-16626	Y	N/A	10.14.0001
R5Z80A	HPE 200Gb QSFP56/QSFP56 5m AOC	REQ-16626	Y	N/A	10.14.0001
R5Z81A	HPE 200Gb QSFP56/QSFP56 10m AOC	REQ-16626	Y	N/A	10.14.0001
R5Z82A	HPE 200Gb QSFP56/QSFP56 15m AOC	REQ-16626	Y	N/A	10.14.0001
R6F27A	HPE 200Gb QSFP56/4x50/25Gb SFP56 2.5m DAC	REQ-16626	Y	N/A	10.14.0001
R5Z76A	HPE 200Gb QSFP56 to QSFP56 0.5m DA Cable	REQ-16626	Y	N/A	10.14.0001
R5Z77A	HPE 200Gb QSFP56 to QSFP56 1m Cable	REQ-16626	Y	N/A	10.14.0001
R5Z78A	HPE 200Gb QSFP56 to QSFP56 2m Cable	REQ-16626	Y	N/A	10.14.0001
R5Z79A	HPE 200Gb QSFP56/QSFP56 2.5m DAC	REQ-16626	Y	N/A	10.14.0001

### Technology standards and safety compliance

The following table describes the technology standards and safety compliance details.

#### *Technology standards and safety compliance*

Technology	IEEE Standards	Laser Safety Information	
		EN/IEC Standards	Lasers
1000 BASE-T	IEEE 802.3ab 1000 BASE-T	-	-
1000 BASE-SX	IEEE 802.3z 1000 BASE-SX	EN/IEC 60825	Class 1 laser product
1000 BASE-LX	IEEE 802.3z 1000 BASE-LX	EN/IEC 60825	Class 1 laser product
1000 BASE-LH	(Not an IEEE standard)	EN/IEC 60825	Class 1 laser product
10 GBASE-T	IEEE 802.3an 10 GBASE-T	-	-
10 GBASE-SR	IEEE 802.3ae 10 GBASE-SR	EN/IEC 60825	Class 1 laser product
10 GBASE-LR	IEEE 802.3ae 10 GBASE-LR	EN/IEC 60825	Class 1 laser product
10 GBASE-ER	IEEE 802.3ae 10 GBASE-ER	EN/IEC 60825	Class 1 laser product
25 GBASE-SR	IEEE 802.3by 25 GBASE-SR	EN/IEC 60825	Class 1 laser product
25 GBASE-eSR	(Not an IEEE standard)	EN/IEC 60825	Class 1 laser product
25 GBASE--BiDi	IEEE 802.3cp 25 GBASE-BR	EN/IEC 60825	Class 1 laser product
25 GBASE-LR	IEEE 802.3cc 25 GBASE-LR	EN/IEC 60825	Class 1 laser product
40 GBASE-SR4	IEEE 802.3ba 40 GBASE-SR4	EN/IEC 60825	Class 1 laser product
40 GBASE-eSR4	(Not an IEEE standard)	EN/IEC 60825	Class 1 laser product
40 GBASE-LR4	IEEE 802.3ba 40 GBASE-LR4	EN/IEC 60825	Class 1 laser product
40 GBASE-ER4	IEEE 802.3bm 40 GBASE-ER4	EN/IEC 60825	Class 1 laser product
40 GBASE-Bidi	(Not an IEEE standard)	EN/IEC 60825	Class 1 laser product
100 GBASE-SR4	IEEE 802.3bm 100 GBASE-SR4	EN/IEC 60825	Class 1 laser product
100 GBASE-LR4	IEEE 802.3ba 100 GBASE-LR4	EN/IEC 60825	Class 1 laser product

Technology	IEEE Standards	Laser Safety Information	
		EN/IEC Standards	Lasers
100G ER4L	(not an IEEE standard)	EN/IEC 60825	Class 1 laser product
100G DR	IEEE 802.3cd 100GBASE-DR	EN/IEC 60825	Class 1 laser product
100G FR	IEEE 802.3cu 100GBASE-FR1	EN/IEC 60825	Class 1 laser product
100G LR	IEEE 802.3cu 100GBASE-LR1	EN/IEC 60825	Class 1 laser product
400G SR8	IEEE 802.3cm 400GBASE-SR8	EN/IEC 60825	Class 1 laser product
4x100G DR	IEEE 802.3cd 100GBASE-DR	EN/IEC 60825	Class 1 laser product
4x100G FR	IEEE 802.3cu 100GBASE-FR1	EN/IEC 60825	Class 1 laser product
4x100G LR	IEEE 802.3cu 100GBASE-LR1	EN/IEC 60825	Class 1 laser product
400G DR4	IEEE 802.3bs 400GBASE-DR4	EN/IEC 60825	Class 1 laser product
400G eDR4	Not an IEEE standard but compatible to 4x 100GBASE-FR1	EN/IEC 60825	Class 1 laser product
400G PLR4	Not an IEEE standard but compatible to 4x 100GBASE-LR1	EN/IEC 60825	Class 1 laser product

## Cabling specifications

This chapter describes the switch connector information and network cable information for cables that should be used with the Hewlett Packard Enterprise switches.



Incorrectly wired cabling is a common cause of problems for LAN communications. Hewlett Packard Enterprise recommends that you work with a qualified LAN cable installer for assistance with your cabling requirements.

The following table describes the cabling specifications.

### Cabling specifications

Type	Speed	Notes
Twisted-pair copper	1000 Mbps operation	Category 5, 100-ohm 4-pair UTP or STP cable, complying with IEEE 802.3ab 1000 BASE-T specifications—Category 5e or better is recommended. See 1000 BASE-T Cable Requirements for additional details.
	10 Gbps operation	Category 6 or 6A, 100-ohm 4-pair UTP cable, or Category 6A or 7, 100-ohm 4-pair STP cable, complying with IEEE 802.3an 10 GBASE-T specifications. See 10 GBASE-T Cable Requirements below and <a href="#">Technology standards and</a>

Type	Speed	Notes
		<a href="#">safety compliance</a> for distances supported with each cable type. CAT6A F/FTP, S/FTP, SF/FTP highly recommended in noisy environments. Refer to <i>Aruba Support Advisory_JL563A_10 GBaseT_APSC-RS20180403-01</i> for more information.
Twinaxial copper	Direct attach cables	One-piece devices consisting of a cable with SFP+ connectors permanently attached to each end, complying with SFF 8431 SFP+ specifications.
Multimode fiber	-	62.5/125 µm or 50/125 µm (core/cladding) diameter, low metal content, graded index fiber-optic cables, complying with the ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a standards respectively. OM1, OM2, OM3, OM4 and OM5 designations are covered by the ISO/IEC 11801.
Single mode fiber	-	9/125 µm (core/cladding) diameter, low metal content fiber-optic cables, complying with the ITU-T G.652 and ISO/IEC 793-2 Type B1 standards.

## 1000 BASE-T Cable Requirements

The Category 5 networking cables that work for 100 BASE-TX connections should also work for 1000 BASE-T, as long as all four-pairs are connected. But, for the most robust connections, you should use cabling that complies with the Category 5e specifications, as described in Addendum 5 to the TIA-568-A standard (ANSI/TIA/EIA-568-A-5).

Because of the increased speed provided by 1000 BASE-T (Gigabit-T), network cable quality is more important than for either 10 BASE-T or 100 BASE-TX. Cabling plants being used to carry 1000 BASE-T networking must comply with the IEEE 802.3ab standards. In particular, the cabling must pass tests for Attenuation, Near-End Crosstalk (NEXT), and Far-End Crosstalk (FEXT). Additionally, unlike the cables for 100 BASE-TX, the 1000 BASE-T cables must pass tests for Equal-Level Far-End Crosstalk (ELFEXT) and Return Loss.

When testing your cabling, be sure to include the patch cables that connect the switch and other end devices to the patch panels on your site. The patch cables are frequently overlooked when testing cable and they must also comply with the cabling standards.

## 10 GBASE-T Cable Requirements

The Category 6 networking cables that work for 1000 BASE-T connections may work for 10 GBASE-T, as long as the distance is less than 30m and the cable installation has been tested for compliance to IEEE requirements. But, for the most robust connections, you should use cabling that complies with the Category 6A or Category 7 specifications, as described in the TIA-568-C (ANSI/TIA-568-C.2) and ISO/IEC 11801 standards. 10 GBASE-T is a sophisticated technology that relies on high quality cable installations. It is sensitive to Alien Near End Crosstalk (ANEXT) which can be generated on the cable due to cables placed in close proximity to other data cables. It is recommended that cable dressing be done carefully and in compliance with recommendations in the TIA TSB-155A.

Like 1000 BASE-T, 10 GBASE-T requires testing of all the crosstalk and return loss parameters described above, and also ANEXT.

In addition to ANEXT, 10 GBASE-T is more sensitive to external electrical noise in the environment. It is recommended that radio transmitters and other sources of high frequency continuous wave radio frequency be kept away from LAN cables.

When testing your cabling, be sure to include the patch cables that connect the switch and other end devices to the patch panels on your site. The patch cables are frequently overlooked when testing cable and they must also comply with the cabling standards.

For 10 GBASE-T, Category 6 patch cables are sensitive to movement once the link has been established, and could cause the link to drop if moved. Therefore, Hewlett Packard Enterprise recommends using Category 6A patch cables, or using cable management options to tie down (dress) the Category 6 patch cables so they cannot move.

For Conducted and Radiated Immunity in accordance with EN55024, the switch is limited to Performance Criteria A with shielded cables (CAT6A).

Access Aruba support and updates, and view warranty and regulatory information

### Accessing Aruba Support

Aruba Support Services	<a href="https://www.arubanetworks.com/support-services/">https://www.arubanetworks.com/support-services/</a>
HPE Networking Support Portal	<a href="https://networkingsupport.hpe.com">https://networkingsupport.hpe.com</a>
North America telephone	1-800-943-4526 (US and Canada Toll-Free Number) +1-408-754-1200 (Primary - Toll Number) +1-650-385-6582 (Backup - Toll Number - Use only when all other numbers are not working)
International telephone	<a href="https://www.arubanetworks.com/support-services/contact-support/">https://www.arubanetworks.com/support-services/contact-support/</a>

Be sure to collect the following information before contacting Support:

- Technical support registration number (if applicable)
- Product name, model or version, and serial number
- Operating system name and version
- Firmware version
- Error messages
- Product-specific reports and logs
- Add-on products or components
- Third-party products or components

### Other useful sites

Other websites that can be used to find information:

Airheads social forums and Knowledge Base	<a href="https://community.arubanetworks.com/">https://community.arubanetworks.com/</a>
Software licensing	<a href="https://lms.arubanetworks.com/">https://lms.arubanetworks.com/</a>
End-of-Life information	<a href="https://www.arubanetworks.com/support-services/end-of-life/">https://www.arubanetworks.com/support-services/end-of-life/</a>
Aruba software and documentation	<a href="https://asp.arubanetworks.com/downloads">https://asp.arubanetworks.com/downloads</a>



## Accessing updates

You can access updates from the Aruba Support Portal or the HPE My Networking Website.

### HPE Networking Support Portal

<https://networkingsupport.hpe.com>

If you are unable to find your product in the Aruba Support Portal, you may need to search My Networking, where older networking products can be found.

### My Networking

<https://www.hpe.com/networking/support>

To view and update your entitlements, and to link your contracts and warranties with your profile, go to the Hewlett Packard Enterprise Support Center **More Information on Access to Support Materials** page:

<https://support.hpe.com/portal/site/hpsc/aae/home/>

Access to some updates might require product entitlement when accessed through the Hewlett Packard Enterprise Support Center. You must have an HP Passport set up with relevant entitlements.

Some software products provide a mechanism for accessing software updates through the product interface. Review your product documentation to identify the recommended software update method.

To subscribe to eNewsletters and alerts:

<https://asp.arubanetworks.com/notifications/subscriptions> (requires an active Aruba Support Portal (ASP) account to manage subscriptions). Security notices are viewable without an ASP account.

## Warranty information

To view warranty information for your product, go to <https://www.arubanetworks.com/support-services/product-warranties/>.

## Regulatory information

To view the regulatory information for your product, view the *Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products*, available at <https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

### Additional regulatory information

Aruba is committed to providing our customers with information about the chemical substances in our products as needed to comply with legal requirements, environmental data (company programs, product recycling, energy efficiency), and safety information and compliance data, (RoHS and WEEE). For more information, see <https://www.arubanetworks.com/company/about-us/environmental-citizenship/>.

## Documentation feedback

Aruba is committed to providing documentation that meets your needs. To help us improve the documentation, send any errors, suggestions, or comments to Documentation Feedback ([docsfeedback-switching@hpe.com](mailto:docsfeedback-switching@hpe.com)). When submitting your feedback, include the document title, part number, edition, and publication date located on the front cover of the document. For online help

content, include the product name, product version, help edition, and publication date located on the legal notices page.