

Insta360


Touch Panel

Insta360 Connect



Product Intro

Pairs with Insta360 Connect to make your work simple and streamlined.

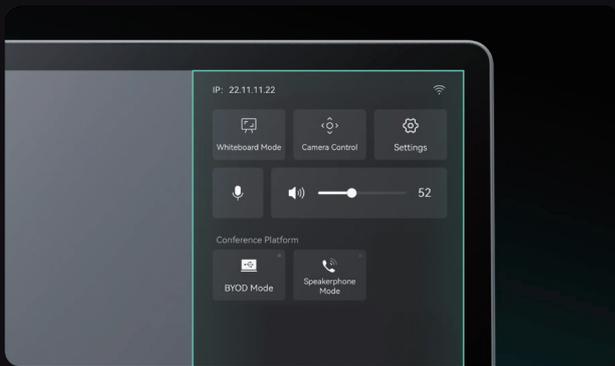


Smooth meetings.

An easy-access menu allows for seamless switching between modes and settings.

Versatile connectivity.

Easy plug-and-play convenience with support for USB, Wi-Fi and wired networks.

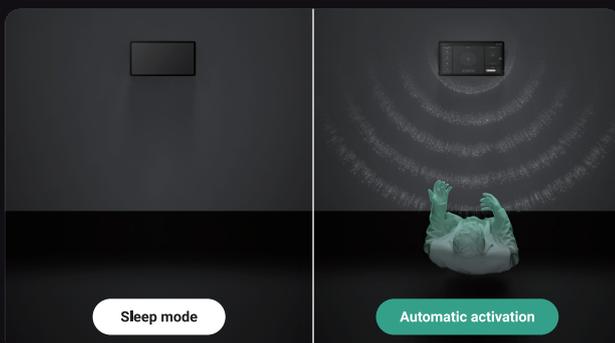

Eco-conscious.

Designed with top eco-friendly corporate practice in mind, automatically enters Sleep Mode when it detects a meeting has ended.

In the Box



1 × Insta360 Touch Panel



1 × Ethernet Cable



1 × USB-A to USB-C



1 × Power Adapter




1 × User Manual

Specs

System:	Android 11	Network:	Wi-Fi
Screen Type:	IPS (In-plane switching)	Power Supply:	Adapter, USB 2.0 A-C
Screen Size:	10.1in (25.7cm)	Security:	2x security slots
Screen Surface:	Fully laminated, glare resistant	Stand Angle:	Adjustable 5° to 45°
Screen Resolution:	1280×800	Operating Temperature:	32°F to 104°F (0°C to 40°C)
FOV:	85° multi-directional	Storage Temperature:	-4°F to 140°F (-20°C to 60°C)
Touch:	10-point capacitive	Acceptable Relative Operating Humidity:	15% to 80%
Light indicator:	LED	Acceptable Relative Storage Humidity:	5% to 95%
Audio:	1x Speaker, 2x MEMS microphone	Dimensions:	240x159x25mm (9.8x6.3x1.0in)
Sensors:	Motion, light, ultrasonic sound	Weight:	531g (18.8oz)
Ports:	1x USB 2.0 A-C, 1x RJ45		

How to Use

1. There are three ways to connect the Touch Panel to Insta360 Connect.

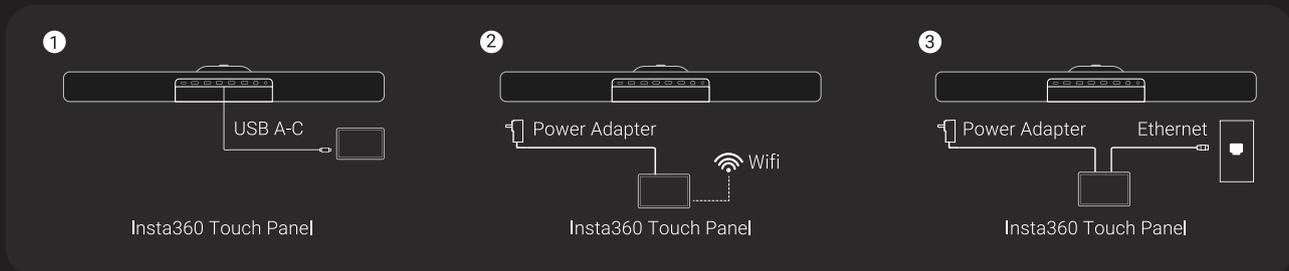

Note: When connecting the Touch Panel to Wi-Fi (②) or using an Ethernet cable (③), it must be on the same LAN as Insta360 Connect.

- Power on:** Connect the Touch Panel to Insta360 Connect via USB A-C cable (①). Insta360 Connect must be powered on. Alternatively, connect the Touch Panel to a power supply with the power adapter and it will automatically power on (②③).
- Power off:** Unplug the USB A-C cable connecting the Touch Panel and Insta360 Connect, or disconnect the Touch Panel from the power supply. The Touch Panel will power off.
- Pairing:** When pairing the Touch Panel and Insta360 Connect for the first time, tap "Get Pairing Code" on the Touch Panel, and a code will pop up on Insta360 Connect. Enter this code on the Touch Panel, and follow the on-screen instructions to complete the setup. You do not need to do this if you connected the Touch Panel to Insta360 Connect via USB A-C cable (①).

Notes

- Avoid dropping the Touch Panel and keep it away from liquids so as not to damage the screen and internal components.
- The Insta360 Touch Panel has a Human Presence Sensor that turns off the touchscreen after long periods of inactivity and wakes up automatically when someone is nearby.

After-Sales Service

The warranty period of the attached product is 2 years from the original retail purchase. Warranty service may vary according to the applicable laws of your state or jurisdiction. For detailed warranty policies, please visit <https://insta360.com/support>.