

InstaShow®

WDC15

Driver-Free 4K UHD Wireless Presentation System

Designed for huddle and small meeting rooms, WDC15 enables instant plug-and-play wireless presentations—no apps, drivers, or network setup required. Presenters—even guests—can access professional-grade presentations with a tap.



No App Download Required

No software or app required—just plug in and instantly share content during your meeting.



No Driver Needed

No drivers needed—just plug in and share your screen instantly during meetings.

*Supports Windows, macOS, Linux, or ChromeOS systems.



No Network Setup Required

No complex network setup or IT help needed. Receiver and button pair automatically—just plug and play to start presenting instantly.

BenQ

Specifications

InstaShow Receiver

Power Supply	2A, DC 5V±10%
Normal Power Consumption	10W
LAN (RJ45)	(x1)
HDMI Out	(x1)
Dimensions without Antenna	110x110x29 mm
Weight	205 g

InstaShow Package

Receiver	(x1)
Button	(x1)
Cradle	(x1)
Power Adapter	(x1)
Antenna	(x2), 2dbi, MIMO
HDMI Cable**	(x1)
Safety Statement	(x1)

InstaShow Button

Connector Type	USB Type-C (Default)**
Function Key	Mode Key

**Switchable between Type-C and HDMI.

InstaShow Cradle


Dimensions	84.5x62.5x128 mm
Weight	568 g

InstaShow Features

Video Outputs	HDMI 1.4 (with HDCP)
Maximum Output Resolution (Receiver)	Up to 4K 30Hz
WiFi Standard	5
Wireless Frequency	5G
Wireless Data Rate (Maximum)	AC1200 (5G 867 Mbps)
Simultaneous Connections	16
WiFi Protected Access	WPA3
Advanced Encryption Standard	AES128
Transmission Distance	15 m
Screen Customisation	Yes (incl. Logo, Guide Screen, Idle Screen, Screen Message, and Room Name)

Part Number: 9H.K0EBY.E0E
EAN: 471 8755 09641 9

3 Steps for One-Time Wireless Presentation Setup

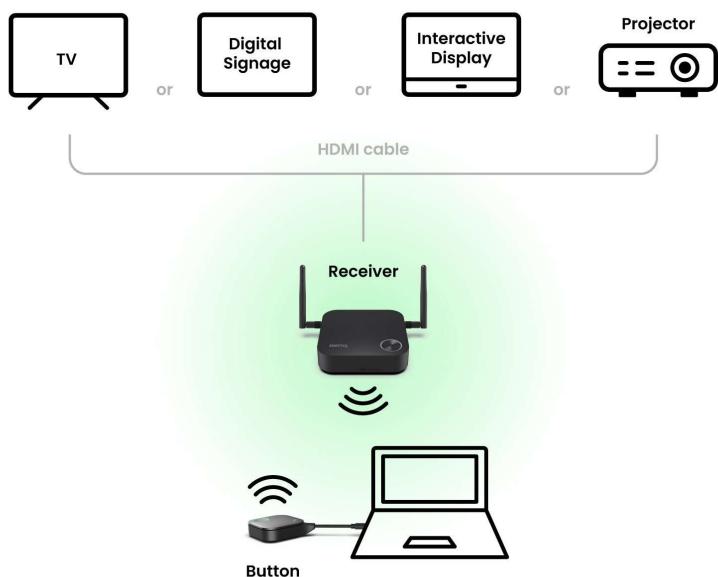

Set up once—no need to rebuild for every meeting.

Steps:

1. Connect display to Receiver via HDMI cable
2. Plug Button into presenter's laptop
3. Share content from presenter's laptop via Button




Direct Touch Control on Display

Control content right from the interactive display—no interruptions, just smooth and natural interaction.


*MacOS Touchback: Available in Q4 2025.

Dimensions & Connectivity

• Button

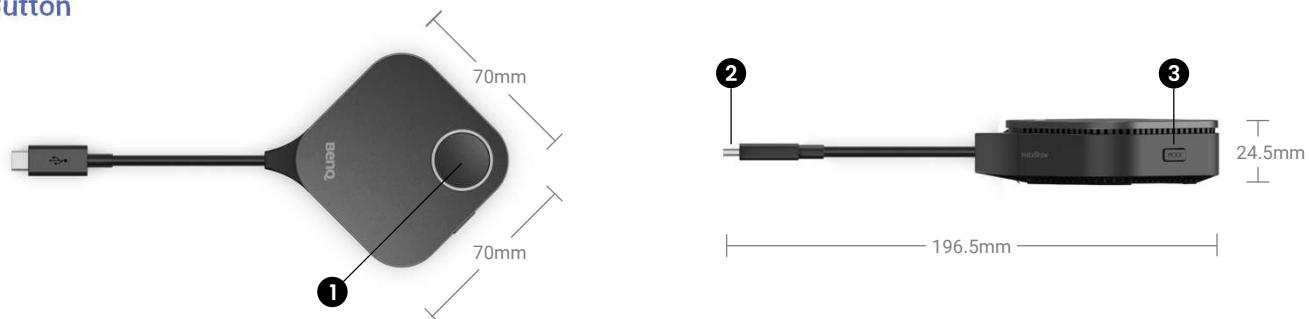

• Receiver

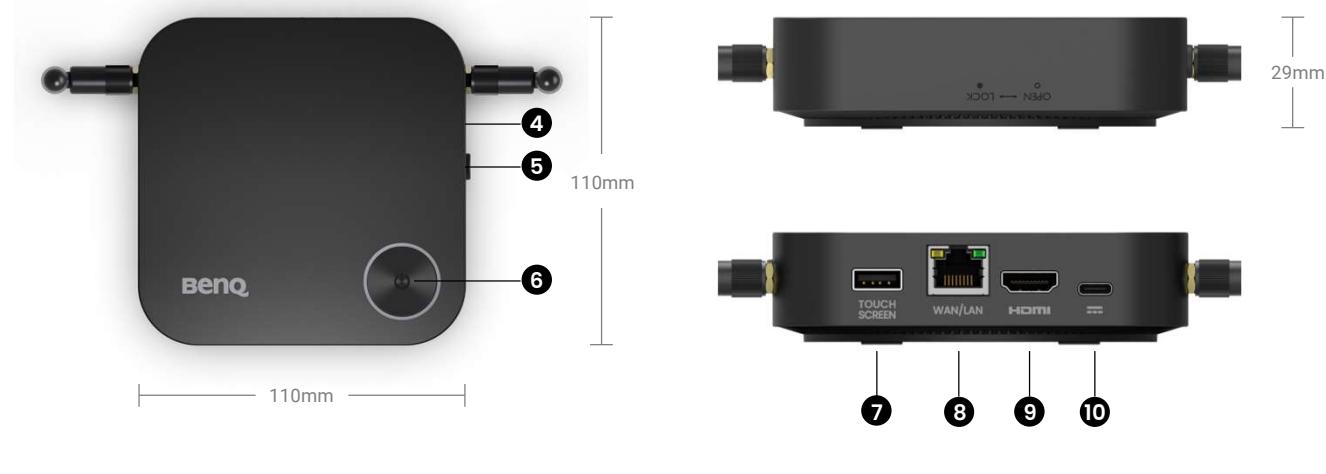

1. Present Key

2. USB-C Connector

3. Mode Key

4. Reset Button

5. Paring Key

6. Standby On/Off

7. USB for Touchback

8. RJ45

9. HDMI Out

10. USB C Power Port



benq.eu/en-eu/business/wireless-presentation/instashow-wireless-collaboration.html

Europe

BenQ Europe B.V.

Meerenakkerweg 1-17, 5652 AR

Eindhoven, The Netherlands

Tel: +31-88-888-9200

Asia Pacific

China

Europe

North America

Latin and Central America

© 2025 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively.

