


WorkForce Pro WF-C529RDW



DATASHEET / BROCHURE

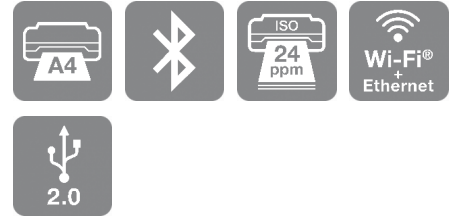

Fast print speeds with a smaller footprint, our latest A4 RIPS printer delivers low TCO and a low environmental impact.

High ink yields of up to 50,000 pages in black and 20,000 in colour make this a powerhouse for offices. Increase your business productivity with less intervention, a fast first page out time, and secure printing rules and workflow processes, all while reducing your printing costs and environmental impact.

Low running costs

High ink yields lower the need to order and replace supplies frequently, and help to deliver predictable print costs and a competitive Total Cost of Ownership (TCO). Also, inkjet technology with fewer replacement parts, lowers the hidden costs of servicing and intervention.

High productivity

A fast First Page Out Time (FPOT) of 4.8 secs in black and 5.3 secs in colour from ready mode, and print speeds of up to 24ppm in colour and mono (ISO speed) help to keep productivity high. An improved durability of 240k pages helps print more for longer. A maximum paper capacity of 1,330 sheets means less time spent refilling.

Low environmental impact

In addition to speeding up printing, the lack of heat needed by our inkjet technology also helps to cut the environmental impact of print by providing a low power solution with fewer supplies. The high ink yield means less waste from supplies, and you can rest assured from a lack of toner dust and ozone gas emissions.

Built for business

The WF-C529RDTW is one of the few A4 business single-function printers to offer secure, follow-me printing with Epson Print Admin.

KEY FEATURES

- **Low running costs**
Benefit from a low Total Cost of Ownership
- **Fast FPOT**
4.8secs in black and 5.3 secs in colour from ready mode
- **Small footprint**
Easier to position in the office or space-critical workplaces
- **Lower your environmental impact**
Low energy consumption reduces CO2 footprint, no ozone gas emissions
- **Secure, follow-me printing**
With Epson Print Admin

PRODUCT SPECIFICATIONS

TECHNOLOGY

| | |
|----------------------|--|
| Printing Method | PrecisionCore™ Print Head |
| Nozzle Configuration | 800 Nozzles Black, 800 Nozzles per Color |
| Minimum Droplet Size | 3.8 pl, With Variable-Sized Droplet Technology |
| Ink Technology | Replaceable Ink Pack System (RIPS) |
| Category | Office Workgroup |
| All-in-One Functions | Print |

PRINT

| | |
|-------------------------------------|---|
| First Page Out | Monochrome 4.8 Seconds, Colour 5.3 Seconds |
| Printing Speed ISO/IEC 24734 | 24 pages/min Monochrome, 24 pages/min Colour |
| Duplex Printing Speed ISO/IEC 24734 | 15 A4 Pages/min Monochrome, 15 A4 Pages/min Colour |
| Maximum Printing Speed | 34 pages/min Monochrome (plain paper 75 g/m ²), 34 pages/min Colour (plain paper 75 g/m ²) |
| Printing Resolution | 4,800 x 1,200 DPI |
| Printing Volume | 50,000 pages per month The maximum number of printed pages per month based on the performance capabilities of the printer, including ISO rated print speeds and paper handling capabilities. |
| Recommended Duty Cycle | 400 - 4,500 pages per month |
| Colours | Black, Cyan, Yellow, Magenta |

For detailed information on printing speeds please visit <http://www.epson.eu/testing>.

CONNECTIVITY

| | |
|--------------------------------|---|
| Network Printing Protocols | LPR, FTP, IPP, LDP, Port 9100, WSD-Print |
| Network Management Protocols | HTTP, DHCP, BOOTP, APIPA, DDNS, mDNS, SNTP, ENPC, SLP, WSD, LLTD, SMTP, LLMNR, POP3, IEEE 802.1X, ARP, GARP, EAP, ICMP, IGMP, DNS-SD, HTTPS, XMPP, LDAP, LDAPS, SNMP 3.0, SNMP Trap |
| Interfaces | Hi-Speed USB - compatible with USB 2.0 specification, Ethernet Interface (1000 Base-T/ 100-Base TX/ 10-Base-T), Wireless LAN IEEE 802.11b/g/n, Wi-Fi Direct, USB 2.0 Type A |
| WLAN Security Network Protocol | WEP 64 Bit, WEP 128 Bit, WPA PSK (TKIP), WPA2 PSK (AES), WPA2 Enterprise (AES) TCP/IPv4, TCP/IPv6, HTTP, HTTPS, IPSEC |

PAPER / MEDIA HANDLING

| | |
|---------------------------------|---|
| Paper Formats | A4 (21.0x29.7 cm), A5 (14.8x21.0 cm), A6 (10.5x14.8 cm), B5 (17.6x25.7 cm), B6 (12.5x17.6 cm), C4 (Envelope), C6 (Envelope), DL (Envelope), No. 10 (Envelope), Letter, Legal, 9 x 13 cm, 10 x 15 cm, 13 x 18 cm, 16:9, HLT, EXE, User defined |
| Compatible Paper Weight | 64 g/m ² - 300 g/m ² |
| Duplex | Yes |
| Standard Paper input | 250 Sheets Standard, 80 Sheets MP tray |
| Output Tray Capacity | 150 Sheets |
| Paper Tray Capacity | 330 Sheets Standard, 1,330 Sheets Maximum |
| Standard paper tray(s) | 80-Sheet Multi-Purpose Tray, 250-sheet paper tray, 500-Sheet paper tray |
| Optional paper tray(s) | 500-Sheet paper tray |
| Rear paper path (special media) | Yes |
| Number of paper trays | 2 |

WorkForce Pro WF-C529RDW

WHAT'S IN THE BOX

- Driver and utilities (CD)
- Power cable
- Quick Setup Guide
- User manual (CD)
- Warranty Documents
- Initialization Ink Supply Units

PRODUCT SPECIFICATIONS

WorkForce Pro WF-C529RDW

PAPER FEED RASF

| | |
|-------------------------|--|
| Paper Input Name | RASF |
| Paper Formats | A4, A5, A6, B5, B6, C4 (Envelope), C6 (Envelope), DL (Envelope), No. 10 (Envelope), Letter, 10 x 15 cm, 13 x 18 cm, 16:9, Legal, Executive |
| Custom sizes | Min 64x 127 mm to Max 215.9x 6,000 mm |
| Compatible paper weight | 64 g/m ² - 300 g/m ² |
| Paper Capacity 1 | 80 Sheets of Plain Paper, 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead, Glossy Photo Paper |

PAPER FEED C1

| | |
|-------------------------|--|
| Paper Input Name | C1 |
| Paper Formats | A4, A5, A6, B5, B6, C4 (Envelope), C6 (Envelope), DL (Envelope), No. 10 (Envelope), Letter, HLT, Executive |
| Custom sizes | Min 89x 127 mm to Max 215.9x 355.6 mm |
| Compatible paper weight | 64 g/m ² - 300 g/m ² |
| Paper Capacity 1 | 250 Sheets of Plain Paper, 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead, Glossy Photo Paper |

PAPER FEED C2

| | |
|-------------------------|---|
| Paper Input Name | C2 |
| Paper Formats | A4, A5, A6, B5, B6, Letter, HLT, LGL, Executive |
| Custom sizes | Min 100x 148 mm to Max 215.9x 355.6 mm |
| Compatible paper weight | 64 g/m ² - 160 g/m ² |
| Paper Capacity 1 | 500 Sheets of Plain Paper, 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead |

PAPER FEED DUPLEX

| | |
|-------------------------|---|
| Paper Input Name | Duplex |
| Paper Formats | A4, A5, A6, B5, B6, Letter, HLT, Legal, Executive |
| Custom sizes | Min 148x 210 mm to Max 216x 297 mm |
| Compatible paper weight | 64 g/m ² - 160 g/m ² |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead |

PAPER FEED C3

| | |
|-------------------------|---|
| Paper Input Name | C3 |
| Paper Formats | A4, A5, A6, B5, B6, Letter, HLT, Legal, Executive |
| Custom sizes | Min 100x 148 mm to Max 215.9x 355.6 mm |
| Compatible paper weight | 64 g/m ² - 160 g/m ² |
| Paper Capacity 1 | 500 Sheets of Plain Paper, 80gsm |
| Media type | Plain Paper, Recycled Paper, Colour Paper, Letterhead |

GENERAL

| | |
|------------------------------------|--|
| Energy Use | 1.2 Watt (sleep mode), 24 Watt (Printing), 8 Watt (Ready), 0.2 Watt (Power off), TEC 0.18 kWh/week |
| Supply Voltage | AC 220 V - 240 V, 50 Hz - 60 Hz |
| Product dimensions | 425 x 535 x 413 mm (Width x Depth x Height) |
| Product weight | 19.3 kg |
| Compatible Operating Systems | Mac OS 10.10.x, Mac OS 10.7.x, Mac OS 10.8.x, Mac OS 10.9.x, Mac OS X 10.11.x, Mac OS X 10.12.x, Mac OS X 10.6.8 or later, Windows 10, Windows 7, Windows 7 x64, Windows 8, Windows 8 (32/64 bit), Windows 8.1, Windows 8.1 x64 Edition, Windows Server 2003 R2 x64, Windows Server 2008 (32/64bit), Windows Server 2008 R2, Windows Server 2012 (64bit), Windows Server 2012 R2, Windows Server 2016, Windows Vista, Windows Vista (32/64 bit), Windows Vista x64, Windows XP SP2 or higher, Windows XP SP3, Windows XP x64, Windows Server 2003 R2, XP Professional x64 Edition, XP Professional x64 Edition SP2 |
| Sound Power | Operation: 6.9 B (A) |
| Noise | Operation: 54 dB (A) |
| Mobile and Cloud printing services | Epson Connect (iPrint, Email Print, Remote Print Driver), Apple AirPrint, Google Cloud Print |
| Power supply | 220V, 240V |

PRODUCT SPECIFICATIONS

WorkForce Pro WF-C529RDW

ADDITIONAL FEATURES

| | |
|--------------------|--|
| Features | Direct Print, Direct print from USB |
| Panel | Type: Color, Diagonal: 6.1 cm |
| Media Handling | Automatic duplex (A4, plain paper), Portrait & Landscape printing, Thick Media Support |
| Security Functions | Limit access function with Epson Web Config, Secure confidential printing with PIN code release, LDAP Address Book, IPsec, IEEE802.1x, SSL (Server authentication), Panel Admin Mode |

OTHER FEATURES

| | |
|------------|---|
| Emulations | PCL5c, PCL6, ESC/P-R, PostScript 3, PDF 1.7 |
|------------|---|

SUPPLIES

| | | |
|--|------------|---------------|
| ● WorkForce Pro WF-C529R / C579R Magenta XL Ink Supply Unit | C13T01C300 | 5,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Yellow XL Ink Supply Unit | C13T01C400 | 5,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Cyan XL Ink Supply Unit | C13T01C200 | 5,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Black XL Ink Supply Unit | C13T01C100 | 10,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Black XXL Ink Supply Unit | C13T01D100 | 50,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Cyan XXL Ink Supply Unit | C13T01D200 | 20,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Magenta XXL Ink Supply Unit | C13T01D300 | 20,000 Seiten |
| ● WorkForce Pro WF-C529R / C579R Yellow XXL Ink Supply Unit | C13T01D400 | 20,000 Seiten |
| ● Maintenance box | C13T671600 | |

OPTIONAL ACCESSORIES

- 500-Sheet Paper Cassette
C12C932871
- Low Cabinet for WF-5000 series
7112286

LOGISTICS INFORMATION

| | |
|-------------------|---------------|
| SKU | C11CG79401BY |
| EAN code | 8715946653495 |
| Country of Origin | Indonesia |
| Layer | 2 Units |
| Layer Block | 2 Units |

WorkForce Pro WF-C529RDW

INK YIELD DATA



● 10,000 pages* 50,000 pages*

●●● 5,000 pages* 20,000 pages*

* Approx. page yield based on ISO/IEC 24711/24712 or ISO/IEC 29102/29103. Actual yield will vary depending on images printed and usage conditions. For more information visit <http://www.epson.eu/pageyield>



For more information please contact:

Home users: 0343 90 37766
Business users*: 0871 42 37766
Republic of Ireland: 01 436 7742
Or visit us at <https://www.epson.co.uk/contactus>
* 10p per minute plus network extras.

Web: www.epson.co.uk
www.epson.ie

Trademarks and registered trademarks are the property of Seiko Epson Corporation or their respective owners.
Product information is subject to change without prior notice.
Last extracted: 2021-02-11

EPSON[®]