



**27" IPS technology panel with height adjustable stand and 100Hz refresh rate**

Stylish edge-to-edge design makes the ProLite XUB2792HSU perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. The 100Hz refresh rate together with FreeSync function provides an instant, tangible improvement in image smoothness. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design. Equipped with speakers, 2 ports USB 3.2, headphone socket, HDMI and DisplayPort connections, a blue light reducer function to reduce eye fatigue and an ergonomic 150mm height adjustable stand for optimal user comfort, make this 27" monitor a great choice for both multi-monitor configuration and office applications.

Available also with fixed stand : [ProLite XU2792QSU-B6 \(2560x1440\)](#), [ProLite XU2792HSU-B6 \(1920x1080\)](#) and in white : [ProLite XUB2792HSU-W6](#)



**IPS Technology**

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



**Slim Line**

Slim Line monitors feature a sleek bezel and are therefore particularly suitable for video wall or a multi-monitor set-up.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	3-side borderless
<b>Diagonal</b>	27", 68.6cm
<b>Panel</b>	IPS Panel Technology LED, matte finish
<b>Native resolution</b>	1920 x 1080 @100Hz (2.1 megapixel Full HD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	250 cd/m <sup>2</sup>
<b>Static contrast</b>	1300:1
<b>Advanced contrast</b>	80M:1
<b>Response time (MPRT)</b>	0.4ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	16.7mIn (sRGB: 99%, NTSC 72%)
<b>Horizontal Sync</b>	31 - 115kHz
<b>Viewable area W x H</b>	597.9 x 336.3mm, 23.5 x 13.2"
<b>Pixel pitch</b>	0.311mm
<b>Colour</b>	matte, black

## 02 INTERFACES / CONNECTORS / CONTROLS

<b>Signal input</b>	HDMI x1 DisplayPort x1
<b>USB HUB</b>	x4 (v. 3.2 Gen 1 (5Gbps, DC5V, 900mA))
<b>HDCP</b>	yes
<b>Headphone connector</b>	yes

## 03 FEATURES

<b>Blue light reducer</b>	yes
<b>Flicker free</b>	yes
<b>FreeSync support</b>	yes
<b>Extra</b>	i-Style colour
<b>OSD languages</b>	EN, DE, FR, ES, IT, PT, RU, JP, CZ, NL, PL
<b>Control buttons</b>	Signal Select / Exit, + / Volume, - / Eco +, Menu, Power
<b>User controls</b>	picture adjust (contrast, brightness, i-Style colour, ACR, Eco, OD, X-Res technology), image settings (blue light reducer, sharp&soft, video mode adjust), colour settings (gamma, 6-axis, colour temp.), audio settings (volume, mute), OSD settings (OSD H. position, OSD V. position, OSD time, OSD rotate, language), extra1 (MBR, FreeSync, USB BC), extra2 (reset, DDC/CI, signal select, HDMI range, opening logo, LED, information)
<b>Speakers</b>	2 x 2W
<b>Convenience</b>	Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX

## 04 MECHANICAL

<b>Display position adjustments</b>	height, swivel, tilt, pivot (rotation both sides)
<b>Height adjustment</b>	150mm
<b>Rotation (PIVOT function)</b>	90°
<b>Swivel stand</b>	90°; 45° left; 45° right
<b>Tilt angle</b>	22° up; 5° down
<b>VESA mounting</b>	100 x 100mm

Cable management system

yes

## 05 ACCESSORIES INCLUDED

Cables

power, USB, HDMI, DP

Other

quick start guide, safety guide

## 06 POWER MANAGEMENT

Power supply unit

internal

Power supply

AC 100 - 240V, 50/60Hz

Power usage

17W typical, 0.5W stand by, 0.3W off mode

## 07 SUSTAINABILITY

Regulations

TCO Certified, CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA

Energy efficiency class (Regulation (EU) 2017/1369)

E

REACH SVHC

above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D

612.5 x 394 (544) x 209.5mm

Box dimensions W x H x D


690 x 455 x 168mm

Weight (without box)

5.7kg

EAN code

4948570122592

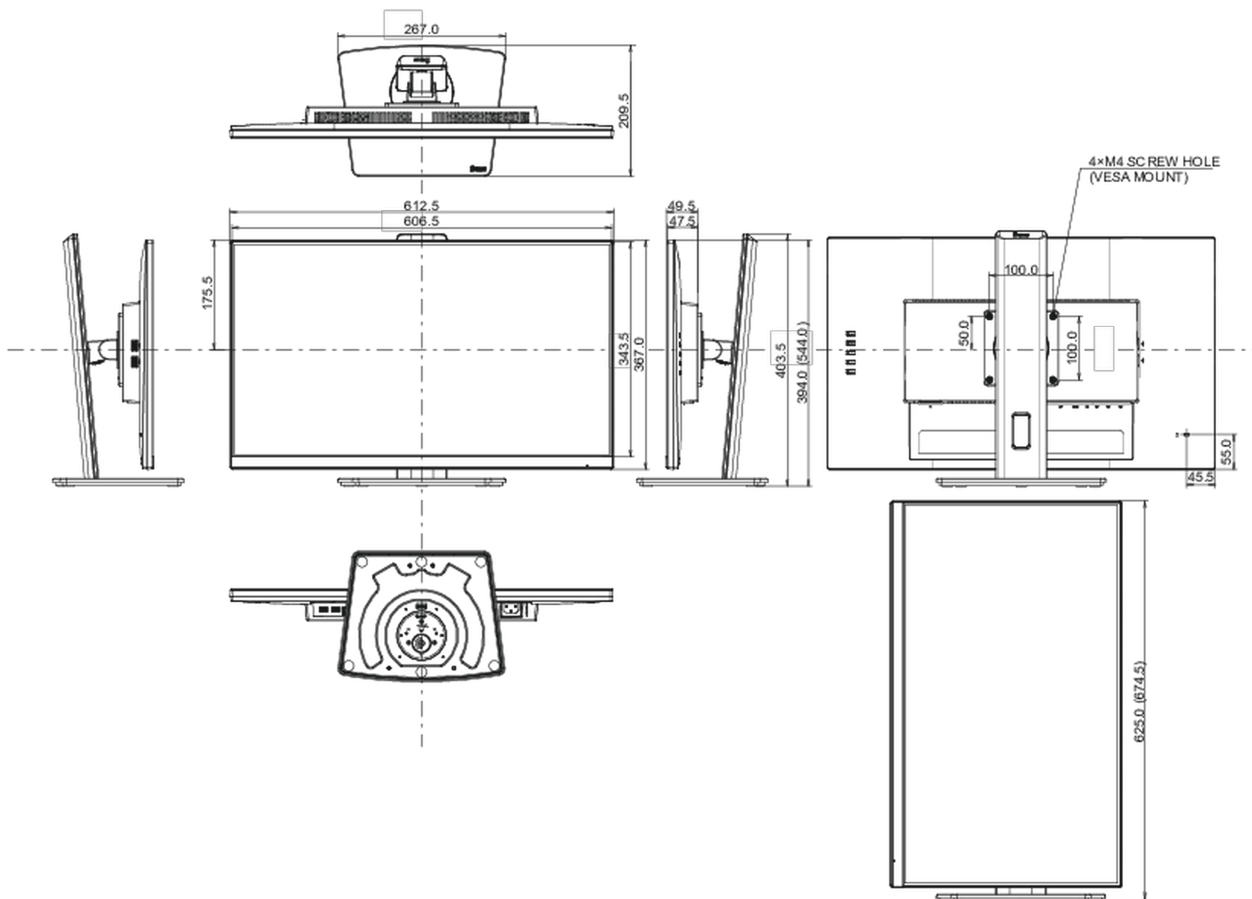

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IIYAMA CORPORATION. ALL RIGHTS RESERVED