
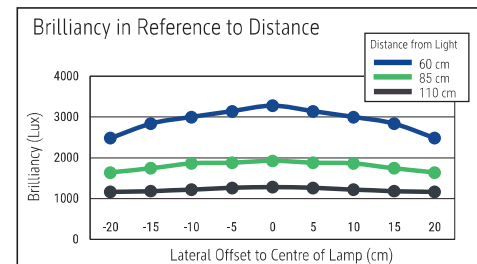
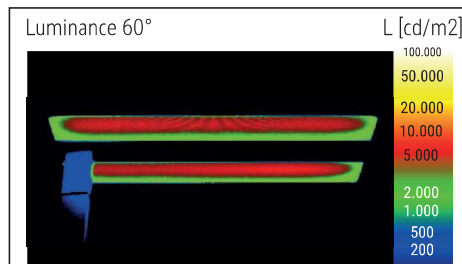


LED floor lamp MAULjuvis sensor, dimmable

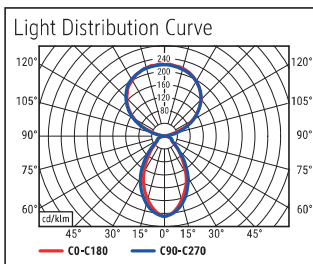

- **Constant light control via movement and daylight sensors**
- **Infinitely adjustable dimmer according to activity and individual preferences**
- **Perceived as pleasant by everyone: Combined direct/indirect workplace lighting**
- **Approx. 50% upward and approx. 50% downward light emission**
- **Double use: Direct lighting of the desk and indirect lighting of the room**
- **GS-symbol for checked safety, technical safety concept Made by MAUL**
- Motion sensor: Reduces the emitted light automatically after a period of 30 minutes without detecting any movement and switches the lamp off after another period of 30 minutes without detecting any movement
- Daylight sensor: The light output of the lamp changes depending on the indoor illuminance level
- Convenient: Diffuser for reduction of shades
- Light source and operating device replaceable by an electrician
- Recyclable packaging

Illuminance of the : indirect: 2.920 lux illuminance at 85 cm distance, 1.840 lux illuminance at 110 cm distance - direct: 2.920 lux illuminance at 85 cm distance, 1.840 lux illuminance at 110 cm distance
 Colour temperature per light source: 4.000 Kelvin (neutral white)
 Number of light sources: 3
 Energy efficiency class per light source: C (spectrum A to G)
 Weighted energy consumption per light source: 68 kWh/1000 h (34 kWh/1000 h & 2 x 17 kWh/1000 h)
 Service life L70B50 per light source: 50.000 h
 Useful luminous flux per light source: 13.060 Lumen (6.500 Lumen & 2 x 3.280 Lumen)
 Material: Head: Aluminium - Column: Aluminium
 Dimensions: Head: 28 x 61 x 4.2 cm - Column: 3.5 x 5.3 cm
 Movement: Head: fixed
 Position of the switch: Column

- Sturdy desk clamp made of steel, clamping width 1,5 to 9,5 cm. Felt desk protection. Height: 120 cm. Ideal for height-adjustable desks
- Guarantee: 2 years

Art. No.	Colour	EAN-Code	Tariff-No.	Base	Cable length (approx.)	Protection class	Pack size / PU	Weight	PU
8258702	white	4002390087261	94052190	clamp	2.50 m	I shock-proof plug	141 x 46,5 x 12 cm	8.367 kg	1 pc(s).
8258790	black	4002390087278	94052190	clamp	2.50 m	I shock-proof plug	141 x 46,5 x 12 cm	8.367 kg	1 pc(s).
8258795	silver	4002390075398	94052190	clamp	2.50 m	I shock-proof plug	141 x 46,5 x 12 cm	8.367 kg	1 pc(s).