


OVERVIEW

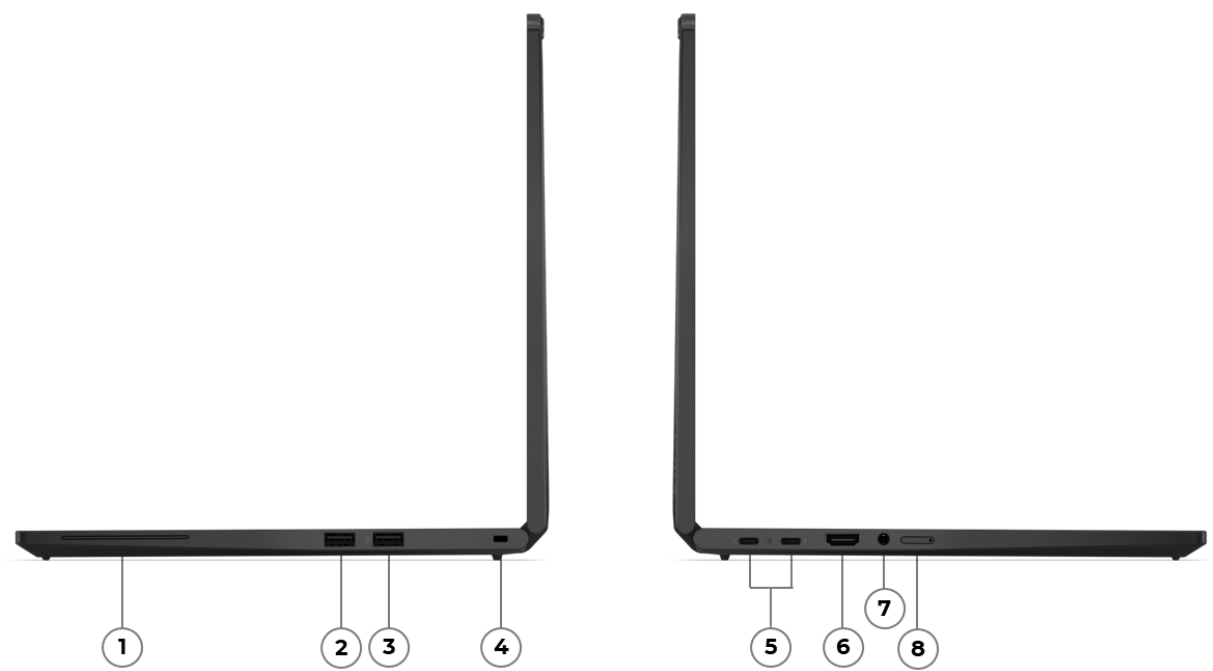

1. Smart card reader *	5. 2x Thunderbolt 4
2. USB-A (USB 5Gbps)	6. HDMI
3. USB-A (USB 5Gbps), Always On	7. Headphone / microphone combo jack (3.5mm)
4. Kensington Nano Security Slot	8. Nano-SIM card slot *

- Notes:
- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® U Series Core Ultra 5 / 7 or Intel® H Series Core Ultra 7 Processor (Series 2)

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU	Overall TOPS
Core Ultra 5 225U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 1.5GHz / E-core 1.3GHz / LPE-core 700MHz	P-core 4.8GHz / E-core 3.8GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 5 235U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 2.0GHz / E-core 1.6GHz / LPE-core 700MHz	P-core 4.9GHz / E-core 4.1GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 7 255H	16 (6 P-core + 8 E-core + 2 LPE-core)	16	P-core 2GHz / E-core 1.5GHz / LPE-core 700MHz	P-core 5.1GHz / E-core 4.4GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ 140T GPU, up to 74 TOPS	Intel® AI Boost, up to 13 TOPS	Up to 96 TOPS
Core Ultra 7 255U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 2GHz / E-core 1.7GHz / LPE-core 700MHz	P-core 5.2GHz / E-core 4.2GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-
Core Ultra 7 265H	16 (6 P-core + 8 E-core + 2 LPE-core)	16	P-core 2.2GHz / E-core 1.7GHz / LPE-core 700MHz	P-core 5.3GHz / E-core 4.5GHz / LPE-core 2.5GHz	24MB	Intel® Arc™ 140T GPU, up to 75 TOPS	Intel® AI Boost, up to 13 TOPS	Up to 97 TOPS
Core Ultra 7 265U	12 (2 P-core + 8 E-core + 2 LPE-core)	14	P-core 2.1GHz / E-core 1.7GHz / LPE-core 700MHz	P-core 5.3GHz / E-core 4.2GHz / LPE-core 2.4GHz	12MB	Intel® Graphics	Intel® AI Boost, up to 12 TOPS	-

AI (Artificial Intelligence)

AI PC Category

AI PC^[1]

NPU

Integrated Intel® AI Boost, up to 13 TOPS

Notes:

[1] AI PCs have a NPU capable of 10+ TOPs to run the Copilot assistant by pressing the optional Microsoft® Copilot key or using Win + C.

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Ubuntu Linux^[1]
- Linux^[2]
- No preload operating system

Notes:

[1], [2] Some features may not be supported on the system with Linux preload, including but not limited to Intel® RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	TGP	Key Features
Intel® Arc™ 140T GPU	Integrated	Shared	Share CPU TDP	DirectX® 12.2
Intel® Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12.2

Monitor Support

Monitor Support^[1]

- Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)
- HDMI® supports up to 4K@60Hz
 - Thunderbolt™ supports up to 8K@60Hz^[2]

Notes:

- ^[1] Refresh rates >60hz also supported, however max resolution will be limited.
- ^[2] 8K resolution support needs 2 display pipes. That is, simultaneous display number will “-1” when 8K resolution displayed.

Chipset

Chipset

Intel® SoC (System on Chip) platform

Memory

Max Memory

- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable
- 64GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type

LPDDR5x-7467^[1]

Notes:

- ^[1] Installed memory is actually LPDDR5x-8533 but runs as LPDDR5x-7467 due to platform limitation.

Storage

Max Storage Support

One drive, up to 2TB M.2 2280 SSD

Storage Slot^[1]

- Models with U series processor: one M.2 2280 PCIe® 4.0 x4 slot
- Models with H series processor: one M.2 2280 PCIe® 5.0 x4 slot

Storage Type**

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4 Performance	512GB	Opal 2.0
M.2 2280 SSD	PCIe® NVMe®, PCIe® 5.0 x4 Performance	1TB / 2TB	Opal 2.0

Notes:

- ^[1] The actual data transfer rate of the following PCIe® interface also depends on the capabilities of the connected PCIe® device. The listed values represent theoretical maximums.
- PCIe® 3.0 (x2 / x4): 2 GB/s (16 Gbps) / 4 GB/s (32 Gbps);
- PCIe® 4.0 (x2 / x4): 4 GB/s (32 Gbps) / 8 GB/s (64 Gbps);
- PCIe® 5.0 (x2 / x4): 8 GB/s (64 Gbps) / 16 GB/s (128 Gbps).

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby Audio™

Microphone

Dual-microphone array, 360° far-field, Dolby Voice®

Camera**

- 5.0MP + IR discrete, with privacy shutter, fixed focus, Computer Vision on Image Signal Processor (ISP), temporal noise reduction^[1]
- 5.0MP, with privacy shutter, fixed focus, temporal noise reduction

Notes:

[1] Computer Vision on ISP is only available on the models with preloaded OS.

Battery

Battery^[1]

58Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr)

Battery Life^[2]

Configuration 1 (max battery life)

MobileMark® 25: up to 16.5 hr with 726 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 12.3 hr / 29.5 hr @200nits

Local video playback: up to 25.7 hr @150nits

Alternate configuration 2

MobileMark® 25: up to 15.9 hr with 564 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 15.3 hr / 30.6 hr @200nits

Local video playback: up to 27.3 hr @150nits

Alternate configuration 3

MobileMark® 25: up to 15.2 hr with 586 performance score @250nits

JEITA-BAT 3.0 (Video/Idle): up to 13.5 hr / 25.0 hr @200nits

Local video playback: up to 25.0 hr @150nits

Notes:

[1] Rapid charge is only guaranteed when the computer is turned off or in standby mode or in hibernation mode. When the computer is powered on, the Charge Time will vary depending on system power consumption and AC adapter power.

[2] Configuration 1 (max battery life): WUXGA (touch) 500nits low power, Intel® Core™ Ultra 7 255H, 32GB LPDDR5x, Win 11, 58Wh battery, best power efficiency power mode

Alternate configuration 2: WUXGA (touch) 500nits low power, Intel® Core™ Ultra 5 225U, 16GB LPDDR5x, Win 11, 58Wh battery, best power efficiency power mode

Alternate configuration 3: WUXGA (touch) 400nits, Intel® Core™ Ultra 5 235U, 16GB LPDDR5x, Win 11, 58Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark® 25](#), JEITA 3.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.

Actual battery life will vary depending on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.

The maximum capacity of the battery will decrease with time, ambient temperature and use.

Refer to [Microsoft® link](#) for more information about the Windows® Performance power slider.

Power Adapter

Power Adapter**^[1]

- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® nano GaN (2-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® nano GaN (3-pin, wall-mount) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® slim GaN (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

Notes:

[1] AC adapter offerings depend on the country.

DESIGN

Display

Display**^[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
14"	WUXGA (1920x1200)	Multi-touch	IPS ^[2]	400nits	Anti-glare	16:10	800:1	45% NTSC	60Hz	85° / 85° / 85° / 85°	UL Low Blue Light (Hardware Solution), 3M™ DBEF5
14"	WUXGA (1920x1200)	Multi-touch	IPS ^[3]	400nits	Anti-reflection, Anti-smudge	16:10	800:1	45% NTSC	60Hz	85° / 85° / 85° / 85°	UL Low Blue Light (Hardware Solution), 3M™ DBEF5
14"	WUXGA (1920x1200)	Multi-touch	IPS ^[4]	500nits	Anti-reflection, anti-smudge	16:10	800:1	100% sRGB	60Hz	85° / 85° / 85° / 85°	Low power, Eyesafe® Certified 2.0
14"	WUXGA (1920x1200)	Multi-touch	IPS ^[5]	500nits	Anti-glare	16:10	1500:1	100% sRGB	60Hz	89° / 89° / 89° / 89°	ThinkPad® Privacy Guard, Eyesafe® Certified 2.0

Touchscreen

OGS (One Glass Solution) multi-touch, supports 10-point touch

Screen-to-Body Ratio

86%

Notes:

- [1] 3M™ DBEF5 (Dual Brightness Enhancement Film) improves the experience with higher brightness and lower energy.
[2], [3], [4], [5] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Multi-mode

Multi-mode

Laptop, tent, stand, and tablet modes supported by 360° hinge

Input Device

Pen

- Lenovo® Yoga® Pen, supports magnetic attachment, tilt detection and Type-C charging
- No pen (purchase separately)

Keyboard

6-row, spill-resistant, multimedia Fn keys, key travel 1.5mm / 1.35mm (Fn row & G/H/B), Copilot key

Keyboard Backlight

LED backlight

UltraNav™

TrackPoint® pointing device, double-tap to open the TrackPoint® Quick Menu
Glass-like Mylar® surface multi-touch 3-button Trackpad, 61 x 115 mm (2.40 x 4.53 inches)

Mechanical

Dimensions (WxDxH)^[1]

313.6 x 222.8 x 12.86/19.21 (front/rear), 21.6 (maximum) mm;
12.35 x 8.77 x 0.51/0.76 (front/rear), 0.85 (maximum) inches

Weight^[2]

Starting at 1.40 kg (3.08 lbs)

Case Color

Black

Case Material

Magnesium (top), aluminium + PC (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

CONNECTIVITY

Network

WLAN + Bluetooth®[1]**

- Intel® Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3^[2]
- Intel® Wi-Fi® 7 BE201, 802.11be 2x2 Wi-Fi® + Bluetooth® 5.4^[3]

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Wireless WAN upgradable to 5G (with antenna ready)
- Quectel EM061K-GL, 4G LTE CAT6, M.2 card, with embedded eSIM functionality
- Rolling Wireless RW350R-GL, 5G Sub-6 GHz, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- KDDI eSIM Program (Japan)^[4]
- No physical SIM card inbox

Ethernet

No onboard Ethernet^[5]

NFC

- Near Field Communication
- No support

Notes:

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2] Wi-Fi® 6E operation is subject to the regulation rules in each country.

[3] Wi-Fi® 7 operation is subject to the regulation rules in each country.

[4] KDDI eSIM Program has no physical SIM card inbox and is for special bid only.

[5] Ethernet support via optional Lenovo® USB-C® to Ethernet Adapter.

Ports^[1]

Standard Ports

- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x USB-A (USB 5Gbps / USB 3.2 Gen 1), Always On
- 2x USB-C® (Thunderbolt™ 4 / USB4® 40Gbps), with USB PD 3.0 and DisplayPort™ 2.1
- 1x HDMI® 2.1, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Nano-SIM card slot (WWAN support models)
- 1x Smart card reader

Notes:

[1] The transfer speed of the ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

Docking

Docking

Various docking solutions supported via Thunderbolt™ / USB-C®.

For more compatible docking solutions, please visit [Docking for ThinkPad® T14s 2-in-1 Gen 1](#)

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified, FIPS 140-3 certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

- Smart card reader, supports ISO 7816 and EMV
- No smart card reader

Fingerprint Reader

Touch style fingerprint reader integrated in power button, match-on-chip

BIOS Security

- NVMe® password
- Power-on password
- Supervisor password
- System management password
- Certificate-based BIOS authentication
- FIDO (Fast Identity Online) authentication
- Self-healing BIOS
- More BIOS security features, please visit [BIOS Simulator^{\[1\]}](#)

Other Security

- Camera privacy shutter
- (Optional) Computer Vision-based User Presence Sensing on Image Signal Processor (ISP)
- (Optional) IR camera for Windows® Hello (facial recognition)
- ThinkShield
- Privacy Guard with Privacy Alert (models with ThinkPad® Privacy Guard display)

Notes:

[1] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

MANAGEABILITY

System Management

System Management^[1]

- Intel® vPro® Enterprise^[2]
- Non-vPro®

Notes:

[1] All versions of the Intel® vPro® platform require an eligible Intel® processor, a supported operating system, Intel® LAN and/or WLAN silicon, firmware enhancements, and other hardware and software necessary to deliver the manageability use cases, security features, system performance, and stability that define the platform. See [Intel® vPro® Platform](#) for details.

[2] Intel® vPro® offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

ACCESSORIES

Bundled Accessories

Bundled Accessories^{***[1]}

- Lenovo® HDMI® to VGA Monitor Adapter
- Lenovo® USB-C® to DisplayPort™ Adapter
- Lenovo® USB-C® to Ethernet Adapter (1Gbps)
- Lenovo® USB-C® to VGA Adapter
- None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for ThinkPad® T14s 2-in-1 Gen 1](#).

OPERATING REQUIREMENTS

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

ENVIRONMENTAL

Sustainability

Material^[1]

90% recycled magnesium on top cover
90% recycled magnesium on keyboard frame
55% recycled aluminium on bottom cover
85% PCC recycled plastic used in backlit keycaps
90% PCC recycled plastic used in speaker enclosure
95% PCC recycled plastic used in cable holders
90% PCC recycled plastic used in the battery frame
90% PCC recycled plastic used in 65W adapters
100% plastic free One Lenovo® Packaging

Notes:

[1] PCC: Post Consumer Content, recycled materials from customers.

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- ENERGY STAR® 9.0
- EPEAT™ Gold Registered^[3]
- ErP Lot 6/26
- RoHS compliant
- TCO Certified, generation 10

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit epeat.net and energystar.gov for more information.

[3] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications**Mil-Spec Test**

MIL-STD-810H military test passed

Other Certifications

- (Optional) UL Low Blue Light (Hardware Solution)
- (Optional) Eyesafe® Certified 2.0

- Feature with ** means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with *** means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

