


## OVERVIEW

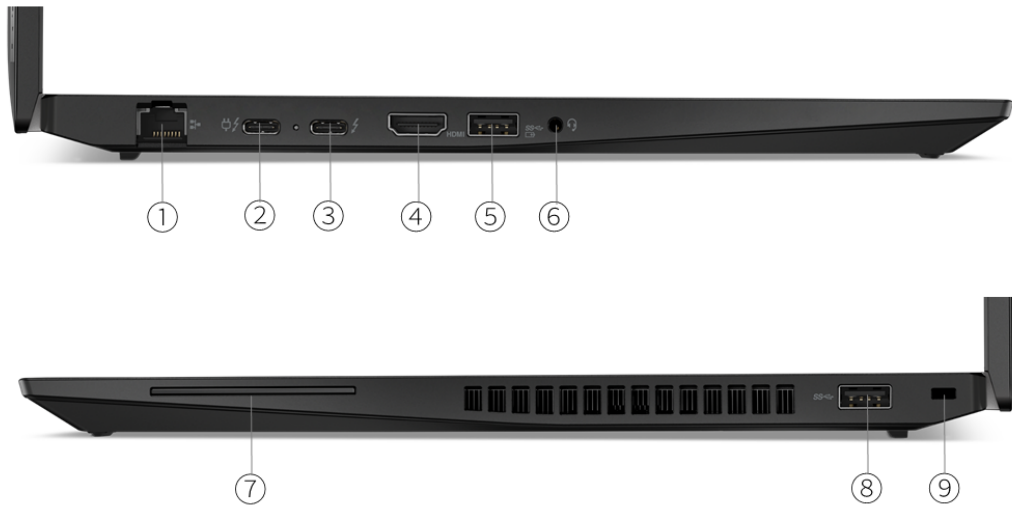

1. Ethernet (RJ-45)	6. Headphone / microphone combo jack (3.5mm)
2. Thunderbolt 4	7. Smart card reader *
3. Thunderbolt 4	8. USB 3.2 Gen 1
4. HDMI 2.1 TMDS	9. Security keyhole
5. USB 3.2 Gen 1 (one Always On)	

Notes:

- Ports with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

12th Generation P series Intel® Core™ i5 / i7 processor, supports processors up to 14 cores; up to 4.8 GHz; up to 28W TDP

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-1240P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1250P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1260P	12 (4 P-core + 8 E-core)	16	P-core 2.1GHz / E-core 1.5GHz	P-core 4.7GHz / E-core 3.4GHz	18MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1270P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.5GHz	18MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1280P	14 (6 P-core + 8 E-core)	20	P-core 1.8GHz / E-core 1.3GHz	P-core 4.8GHz / E-core 3.6GHz	24MB	DDR4-3200	Intel Iris Xe Graphics

### Operating System

#### Operating System\*\*

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Ubuntu Linux
- Red Hat Enterprise Linux (certified only)

### Graphics

#### Graphics\*\*<sup>[1]</sup>

Graphics	Type	Memory	Boost Clock	TGP	Connector	Max Resolution	Key Features	Remark
Intel Iris Xe Graphics	Integrated	Shared	-	Share CPU TDP	-	-	DirectX® 12	-
NVIDIA® T550 Laptop GPU	Discrete	4GB GDDR6	-	30W	-	-	DirectX 12	-

#### Notes:

1. Intel Iris Xe Graphics requires dual-channel memory. On models with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics.

### Monitor Support

#### Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and Thunderbolt™)

- HDMI supports up to 3840x2160@60Hz
- Thunderbolt supports up to 5120x3200@60Hz (Thunderbolt or USB-C® to DP) or 1920x1080@240Hz (USB-C to DP)

### Chipset

#### Chipset

Intel SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

#### Memory Slots

# ThinkPad P16s Gen 1 (Intel)

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

## Memory Type

DDR4-3200 non-ECC

### Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support<sup>[1]</sup>

One drive, up to 2TB M.2 2280 SSD

### Storage Slot

One M.2 2280 PCIe® Gen 4x4 slot, supports M.2 2280 SSD

### Storage Type\*\*

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe 4.0 x4 Performance	-	512GB / 1TB / 2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Value	-	256GB / 512GB / 1TB	Opal2

### Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

### Optical

None

### Card Reader

No card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, Dolby® Audio™

### Microphone

- Dual array microphone, Dolby Voice
- No microphone

### Camera\*\*

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- IR & FHD 1080p hybrid, with privacy shutter, fixed focus
- No camera

## Battery

### Battery\*\*

- Integrated Li-Polymer 52.5Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 86Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 135W AC adapter

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 100W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 135W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

# ThinkPad P16s Gen 1 (Intel)

- No power adapter

Notes:

1. AC adapter offerings depend on the country.

## DESIGN

### Display

#### Display\*\*<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
16.0"	WUXGA (1920x1200)	None	IPS	300 nits	Anti-glare	16:10	800:1	45% NTSC	170°	DC dimming
16.0"	WUXGA (1920x1200)	None	IPS	400 nits	Anti-glare	16:10	1000:1	100% sRGB	178°	ICC Template color calibration, Low power, Low blue light, TUV Eye Comfort, DC dimming
16.0"	WUXGA (1920x1200)	Multi-touch	IPS	300 nits	Anti-glare	16:10	800:1	45% NTSC	170°	DC dimming
16.0"	WUXGA (1920x1200)	Multi-touch	IPS	500 nits	Anti-glare	16:10	1000:1	100% sRGB	170°	ThinkPad® Privacy Guard, Low Blue Light, TUV Eye Comfort, DC dimming
16.0"	WQXGA (2560x1600)	None	IPS	400 nits	Anti-glare	16:10	1200:1	100% sRGB	170°	Dolby Vision™, X-Rite® Pantone® Factory Color Calibration (ΔE<2), Low blue light, TUV Eye Comfort, DC dimming

#### Color Calibration\*\*

- X-Rite Pantone factory color calibration (WQXGA display)
- ICC Template color calibration (selected WUXGA display)
- No color calibration

#### Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee  
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

### Input Device

#### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

#### Keyboard Backlight

- LED backlight
- Non-backlight

#### UltraNav™

3-button TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 67 x 115 mm (2.64 x 4.53 inches)

### Mechanical<sup>[1]</sup>

#### Dimensions (WxDxH)

Models	Dimensions
Integrated graphics models	361.98 x 255.5 x 20.5 mm (14.25 x 10.06 x 0.81 inches)
NVIDIA graphics models	361.9 x 255.5 x 20.83 mm (14.25 x 10.06 x 0.82 inches)

**Weight**

Models	Weight
Model with grey cover	Starting at 1.683 kg (3.71 lbs)
Model with black cover	Starting at 1.677 kg (3.7 lbs)

**Case Color\*\*[2]**

- Black
- Storm grey

**Case Material\*\***

- Model with black cover: PC 50% GF + PC 20% CF (top), PPS (bottom)
- Model with grey cover: Aluminium (top), PPS (bottom)

**Notes:**

1. The system dimensions and weight vary depending on configurations.
2. Storm grey case will be available in in the middle of May.

**CONNECTIVITY****Network****Onboard Ethernet\*\***

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), supports Wake-on-LAN

**WLAN + Bluetooth®\*\*[1]**

- Intel Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Qualcomm® NFA-725A Wi-Fi 6E, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2

**WWAN\*\***

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM05-G, CAT4, M.2 card
- Integrated Mobile Broadband 4G LTE-A, Fibocom L860-GL, CAT16, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

**SIM Card**

- Gemalto eSIM
- No SIM card inbox

**NFC**

- Near Field Communication
- No support

**Notes:**

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

**Ports<sup>[1]</sup>****Standard Ports**

- 2x USB 3.2 Gen 1 (one Always On)
- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI, up to 4K/60Hz
- 1x Ethernet (RJ-45)
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Security keyhole

**Optional Ports**

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt 3/4: 40 Gbit/s

## Docking

### Docking

Various docking solutions supported via Thunderbolt or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad P16s Gen 1 \(Intel\)](#)

## Monitor Cable

### Monitor Cable\*\*

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

## SECURITY & PRIVACY

## Security

### Security Chip\*\*

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in SoC

### Physical Locks

Kensington® Security Slot, 3 x 7 mm

### Smart Card Reader

- Smart card reader
- No smart card reader

### Fingerprint Reader

- Touch style fingerprint reader on power button
- No fingerprint reader

### BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

### Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

## MANAGEABILITY

## System Management

### System Management<sup>[1]</sup>

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

## SERVICE

## Warranty

### Base Warranty\*\*<sup>[1]</sup>

- 1-year depot service
- 1-year depot with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

---

**Notes:**

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

## ENVIRONMENTAL

### Sustainability

#### Material

97% PCC recycled plastic used in speaker enclosure  
97% PCC recycled plastic used in the 52.5Wh battery  
95% PCC recycled plastic used in standard 65W adapter  
Low-temperature solder  
90% recycled and/or sustainable packaging

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

---

**Notes:**

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified 9.0
- RoHS compliant

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

- (Optional) TÜV Rheinland® Eye Comfort Certification
- (Optional) TÜV Rheinland Low Blue Light

### ISV Certifications

#### ISV Certifications

Please visit [ISV certifications for Lenovo Workstations](#)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



