


OVERVIEW

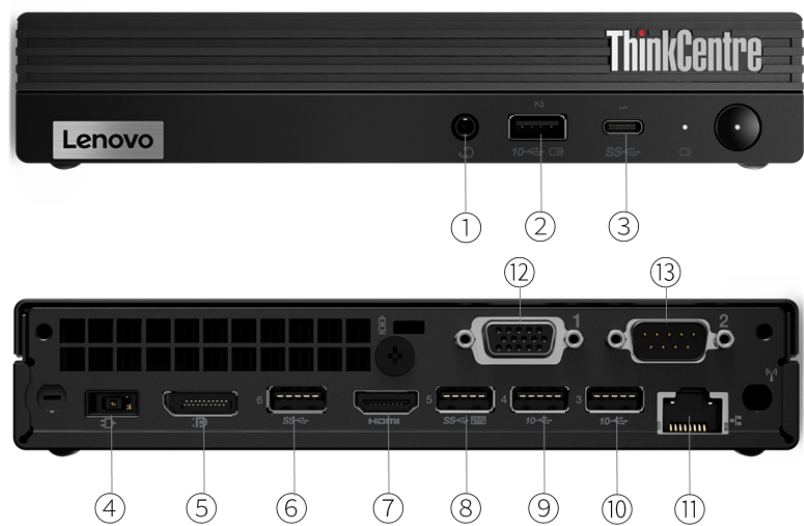

1. Headphone / microphone combo jack (3.5mm)	8. USB 3.2 Gen 1
2. USB 3.2 Gen 2	9. USB 3.2 Gen 2
3. USB-C 3.2 Gen 1	10. USB 3.2 Gen 2
4. Power connector	11. Ethernet (RJ-45)
5. DisplayPort	12. Optional port 1 (VGA is shown) *
6. USB 3.2 Gen 1	13. Optional port 2 (serial is shown) *
7. HDMI	

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, 10th Generation Intel Core™ i3, or 11th Generation Intel Core i5 / i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G5905T	2	2	3.3GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6405T	2	4	3.5GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6505T	2	4	3.6GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10105T	4	8	3.0GHz	3.9GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10305T	4	8	3.0GHz	4.0GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400T	6	12	2.0GHz	3.6GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10500T	6	12	2.3GHz	3.8GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-11400T	6	12	1.3GHz	3.7GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-11500T	6	12	1.5GHz	3.9GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11600T	6	12	1.7GHz	4.1GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i7-11700T	8	16	1.4GHz	4.6GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i9-11900T	8	16	1.5GHz	4.9GHz	16MB	DDR4-3200	Intel UHD Graphics 750

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics**[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x HDMI®, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP /	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA),	DirectX 12

			USB-C / dual DP)	4096x2304@60Hz(USB-C)	
Intel UHD Graphics 730	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX 12
Intel UHD Graphics 750	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX 12

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 3 independent displays via (onboard DP, onboard HDMI, and one optional port [VGA / 2nd DP / 2nd HDMI / USB-C]) or (one onboard port [DP / HDMI] and optional dual DP [MST mode])

Chipset

Chipset

Intel B560 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-2933

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type^{**}

- DDR4-2666
- DDR4-2933
- DDR4-3200

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

Up to two drives, 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB
- M.2 SSD up to 2TB

Storage Type^{***}

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe® NVMe®	-	-
M.2 2280 SSD	PCIe NVMe	-	Opal

RAID

No support

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical**

- DVD-ROM, slim (9.0mm), via USB external ODD box
- DVD burner (DVD±RW), slim (9.0mm), via USB external ODD box
- None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB codec

Speakers

Single speaker, 1.5W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
135W	Adapter	89%	Autosensing
No power supply	-	-	-

DESIGN

Input Device

Keyboard**

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard, black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse**

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Fingerprint Mouse (USB connector), black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)

Models	Dimensions
Tiny only	179 x 182.9 x 36.5 mm with rubber feet (7.05 x 7.2 x 1.44 inches with rubber feet)

Weight

Models	Weight
Tiny only	1.25 kg (2.76 lbs)
With VESA mount & ODD box	1.74 kg (3.84 lbs)

Case Color

Black

Bays

1x 2.5" disk bay

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

(Optional) toolless chassis open (toolless chassis screw required) and toolless M.2 SSD, HDD, memory assembly / removal

Stand

- Vertical stand
- No stand

IO Box

No IO box

Mounting

- VESA mount bracket kit, supports VESA mount 75mm and 100mm
- None

Others

- (Optional) Dust filter
- (Optional) Power adapter cage

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-V, 1x RJ-45, supports Wake-on-LAN

Optional Ethernet

No optional Ethernet

WLAN + Bluetooth[®]^[1]**

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi[®] + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- No WLAN and Bluetooth

Notes:

1. Bluetooth 5.2 is hardware ready but may run at lower version due to OS limitation

Ports^[1]

Front Ports

- 1x USB 3.2 Gen 2 (Always On and fast charge)
- 1x USB-C 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)

Optional Front Ports

None

Rear Ports^[2]

- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x HDMI
- 1x DisplayPort™
- 1x Ethernet (RJ-45)

Optional Rear Ports^{*}**

- 2x USB 3.2 Gen 1 ports (share one USB 3.2 Gen 1 bandwidth, occupy optional port 1 and 2)
- 2x DisplayPort ports (occupy Optional port 1 and 2)
- Optional port 1 (one of VGA / 2nd DisplayPort / 2nd HDMI / serial / USB-C 2.0 with DisplayPort function)
- Optional port 2 (serial)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s

2. For video ports on discrete graphics, please see graphics section

Monitor Cable

Monitor Cable***

- DP to dual DP dongle
- Dual DP to DVI
- Dual DP to HDMI
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle
- DP to VGA cable (1.5M)
- DP to VGA dongle
- HDMI to HDMI cable (1.5m)
- HDMI to VGA dongle
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management

Non-vPro

SERVICE

Warranty

Base Warranty**^[1]

- 1-year depot service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- (Optional) EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

Other Certifications

Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.




intel



intel



intel

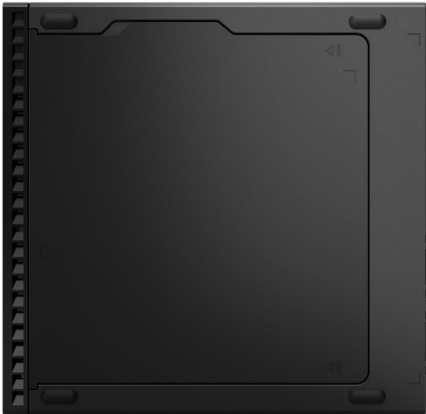

intel



intel



intel