



Vehicle Mounted Terminals Slim, robust and powerful – VMT9000 series

adstec

Industrial IT



Terminal VMT9000 Series

Industrial IT platforms for warehousing and logistics, as well as agricultural and construction machinery **Technology for professionals**

That's something you can count on. For more than three decades, ADS-TEC has continuously provided state of the art, powerful PC technology with an industrially-oriented design. Our complete depth of development and the state-of-the-art processes are the basis for customer-oriented products and individual solutions. Technology 100% made in Germany – a good feeling for ADS-TEC customers.



VMT9000 series **Vehicle terminals of the fifth generation**

With its technologically advanced design and exceptional quality, the VMT9000 series is carrying on the tradition of award-winning ADS-TEC operating devices. The family of terminals and its wide range of features were developed specifically for the target markets of logistics and agricultural and construction machinery on the basis for almost 40 years of industry-specific experience. The VMT9000 series is characterised by an especially robust design to ensure reliable function even under the most demanding conditions.

With the VMT9000 series, you can select from freely configurable features based on the latest industrial-grade PC technology according to your company's individual needs.

VMT9000 Series Product Benefits

HIGHLIGHTS

- Can be used flexibly on forklifts and vehicles
- Compact design with high performance
- The latest Intel Atom® technology



Powerful

- Equipped with the latest Intel Atom® series x7-E3950 and x5-E3930 (Apollo Lake)



Sunlight readable

- Optimum readability in difficult visibility conditions
- Reliable functionality even outdoors



Touch screen

- Select between resistive and capacitive touch-screens
- Both touch-screen variants can be operated with gloves
- Extremely break- (IK08) and abrasion-resistant front sides



Robustness

- IP66 certified
- Vibration and impact resistance acc. to class 5M3
- Wide operating temperature range from -30 °C to +60 °C
- Sturdy aluminium die-cast case
- Resistant to a wide range of chemicals and UV radiation as well as adverse weather conditions
- Screwless design for simplified cleaning



Power supply

- Wide-range power adapter for flexibly connecting a 12 V, 24 V or 48 V power supply
- Input voltage range 9 – 72 V



Sensors & data security

- Automatic brightness adjustment
- Integrated proximity and acceleration sensor
- User identification via RFID
- Smartcard-secured VPN tunnel and integration in the ADS-TEC IoT service platform Big-LinX®



Wireless – WLAN, Bluetooth, WWAN and GPS

- The latest WLAN standards for optimum roaming behaviour
- External antenna can be connected in the case of difficult transmission and reception conditions
- WWAN and GPS for outdoor applications
- Bluetooth for connecting scanners, etc.



UPS

- UPS function allows to work without interruption, even if the forklift battery needs to be replaced
- UPS integrated in the interface cover, making it easy to replace
- Provides power for approx. 10 – 15 minutes of operation



Ignition function on vehicles

- Terminal is switched on by means of ignition voltage
- The system is either disabled or shut down when the ignition key is removed

VMT9000 Series Technical Data

		VMT9010	VMT9012	VMT9112	VMT9015
Housing		Fanless die-casting aluminium housing powder-coated			
Touch screen		Break- and abrasion-resistant front sides			
		Resistive industrial touch-screen		-	Resistive industrial touch-screen
		PCAP multi-touch			
Display	LED backlight	10" TFT	12.1" TFT	12.1" TFT (widescreen)	15" TFT
	Resolution	XGA 1024 x 768 pixels	XGA 1024 x 768 pixels	WXGA 1280 x 800 pixels	XGA 1024 x 768 pixels
	Colours	max. 16.2 million	max. 16.2 million	max. 16.2 million	max. 16.2 million
		All displays are sunlight-readable			
Front keys		Four freely configurable front keys			
System versions		Intel Atom® x5-E3930 1.8 GHz + 4GB LPDDR4 RAM Intel Atom® x7-E3950 2.0 GHz + 8GB LPDDR4 RAM			
On-board mass storage		64 GB eMMC			
Mass storage		Optional: 128 GB SSD			
Interfaces	USB	1 x USB 3.0 in side cover 3 x USB 3.0			
	Serial	COM1 (RS232, 5-V supply can be switched in) Optional: COM2 (RS232)			
	CAN	Optional			
Network		2 x 1 Gbit/s Ethernet RJ45			
Wireless	WLAN	Optional: IEEE 802.11a/b/g/n/ac, incl. connection for external antenna			
	WWAN	Optional: GPRS, EDGE, HSPA+, LTE			
	WPAN	Optional: Bluetooth			
Position monitoring		Optional: GPS through the connection of an external antenna			
Sound		Integrated speaker			
RFID	Supported transponders	Optional: LEGIC advant ATC, LEGIC card-in-card solution AFS, LEGIC prime MIM, NXP MIFARE DESFire, NXP MIFARE plus, NXP MIFARE Smart MX, Texas Instruments Tag-It, EM Microelec-tronics EM4035, Infineon my-d, NFC Forum Tag types 2/3/4, NXP Ultralight, NXP MIFARE Classic (UID), Sony Felica (plain text), Inside Contactless (UID), HID iClass (UID)			
Sensors		Brightness sensor, proximity sensor, acceleration sensor			
Power adapter (internal)		12/24/48 VDC (9 – 72 VDCIN) Ignition function via vehicle ignition Optional: uninterruptible power supply (UPS), typically 10 – 15 min			
Operating system		Windows® 10 IoT Enterprise, Linux, IGEL Linux			
Weight		approx. 3.2 kg	approx. 3.65 kg	approx. 3.7 kg	approx. 4.7 kg
Environment	IP protection	IP66 all-round protection			
	Impact-resistant front	IK08 acc. to EN 62262			
	Operating temperature	-30 °C to +60 °C			
	Storage temperature	-40 °C to +85 °C			
	Humidity	95% non-condensing			
		Vibration and impact			
		Class 5M3 acc. to EN 60721-3-5			
Accessories	Brackets	Optional: various mounting adapters and RAM mounting solutions			
	Power adapter	Optional: table power adapter 230 VAC at 24 VDC			
	Connection cable	Optional: cable kit for connection to forklifts			
	Antenna	Optional: external WLAN antenna with magnetic base			
Dimensions (W x H x D)		277 x 249 x 50 mm	312 x 277 x 50 mm	331 x 256 x 50 mm	380 x 326 x 50 mm



An overview of all accessories and the technical dimensional drawings can be found at:
www.ads-tec.de/en/industrial-it/terminals/vmt9000-series/download.html

Security through software tools and ADS-TEC service


Focus is on the customer Services and individual configuration

ADS-TEC continues to support you after you purchase a device and offers various service agreement options. Furthermore, the VMT9000 series with Big-LinX – the IoT service platform from ADS-TEC – is prepared for Industry 4.0 applications in logistics.

	without service package	BASIC ads-tec Service	SILVER ads-tec Service	GOLD ads-tec Service	FCC ads-tec Service
Protection against technical malfunctions	– *	✓	✓	✓	–
Contract term	– *	36/60 months	36/60 months	36/60 months	–
Processing time of the industrial IT product in the event of service	20 AT	10 AT	5 AT	3 AT	–
Protection against mechanical damages	– *	–	–	–	–
Assumption of repair costs also for mechanical damages	– *	–	–	–	✓

ADS-TEC Services The packages at a glance

In order to cover technical malfunctions it is possible, beyond the statutory warranty, to purchase an ADS-TEC industrial IT product for an extended service. In this way, it is possible to have longer-term protection against repair costs due to technical malfunctions.

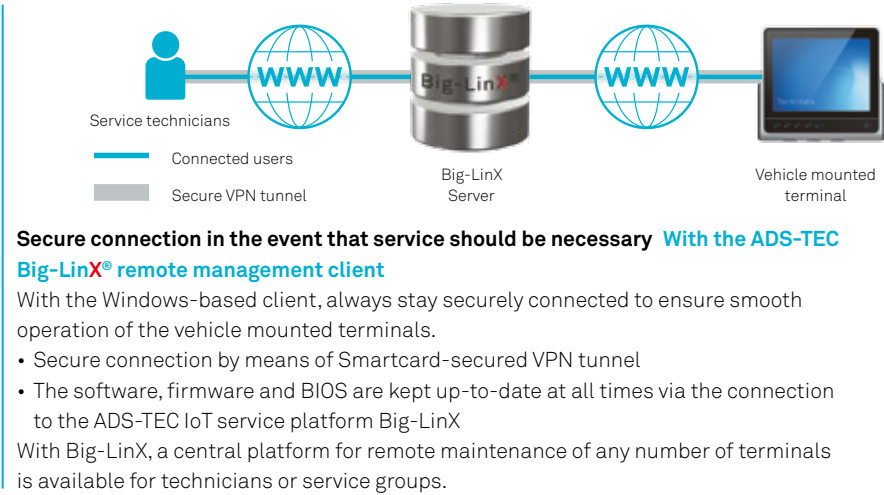

*only contractually agreed warranty



Company headquarters (above) in Nürtingen near Stuttgart, production site in Wilsdruff near Dresden

ads-tec GmbH **A strong partner**

- Products from ADS-TEC have been developed in-house for almost 40 years
- 100% depth of development is the basis for long-term and individual solutions
- Modern processes for development, supply chain management, production and service
- Customised solutions based on tried-and-tested standard products
- Roll-out, asset and solution management services
- References and applications e.g. in the areas of automation, logistics, medicine and the construction equipment industry as well as network operators, energy suppliers and public utilities
- International certifications for IT products and battery storage
- In-house laboratory and testing facilities
- Highest safety standards
- Leading technology and state-of-the-art technological standards
- Permanent technology transfer in cooperation with universities
- Intel® Technology Provider Platinum Partner and member of the Intel® Internet of Things Solutions Alliance
- Involvement in networks and associations

Technology 100% made in Germany



Technology
Provider
Platinum 2018

Learn more about our complete portfolio of Industrial IT solutions and experience how Industry 4.0 applications can be successfully implemented: www.ads-tec.de/en/industrial-it

ads-tec GmbH
Heinrich-Hertz-Straße 1
72622 Nürtingen
Phone +49 70 22 25 22-200
Fax +49 70 22 25 22-402
sales@ads-tec.de
www.ads-tec.de



 **TECHNOLOGY
MADE IN GERMANY**



Industrial IT

