


OVERVIEW

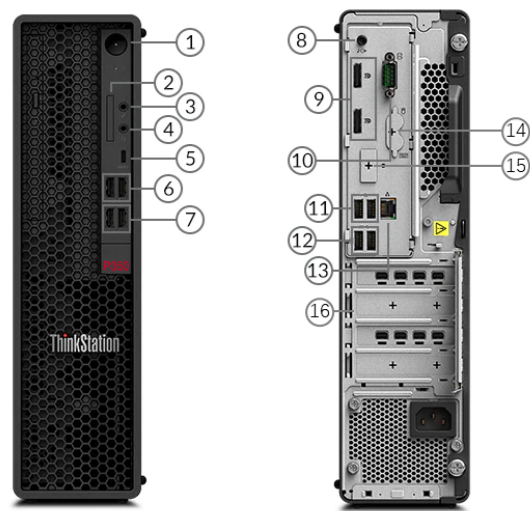

1. Power button	9. 2x DisplayPort
2. Card reader *	10. Serial
3. Microphone (3.5mm)	11. 2x USB 3.2 Gen 1
4. Headphone / microphone combo jack (3.5mm)	12. 2x USB 3.2 Gen 1
5. USB-C 3.2 Gen 2 (data transfer only)	13. Ethernet (RJ-45)
6. 2x USB 3.2 Gen 1	14. 2x PS/2 ports (keyboard / mouse) *
7. 2x USB 3.2 Gen 2	15. Video port (DisplayPort, HDMI, or USB-C) *
8. Line-out (3.5mm)	16. Optional ports on expansion cards *

Notes:

- Ports with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

10th Generation Intel® Core™ i3, 11th Generation Intel Core i5 / i7 / i9, or Intel Xeon® Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-10105	4	8	3.7GHz	4.4GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10305	4	8	3.8GHz	4.5GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10325	4	8	3.9GHz	4.7GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400	6	12	2.9GHz	4.3GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10500	6	12	3.1GHz	4.5GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-11400	6	12	2.6GHz	4.4GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-11500	6	12	2.7GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11600	6	12	2.8GHz	4.8GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i7-10700	8	16	2.9GHz	4.8GHz	16MB	DDR4-2933	Intel UHD Graphics 630
Core i7-11700	8	16	2.5GHz	4.9GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i9-10900	10	20	2.8GHz	5.2GHz	20MB	DDR4-2933	Intel UHD Graphics 630
Core i9-11900	8	16	2.5GHz	5.2GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Xeon W-1350	6	12	3.3GHz	5.0GHz	12MB	DDR4-3200	Intel UHD Graphics P750
Xeon W-1370	8	16	2.9GHz	5.1GHz	16MB	DDR4-3200	Intel UHD Graphics P750
Xeon W-1390	8	16	2.8GHz	5.2GHz	16MB	DDR4-3200	Intel UHD Graphics P750

Operating System

Operating System

- Windows® 10 Pro 64
- Windows 10 Pro 64 for Workstations
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)
- No operating system

Graphics

Integrated Graphics

- Intel UHD Graphics 630
- Intel UHD Graphics 730
- Intel UHD Graphics 750
- Intel UHD Graphics P750

Discrete Graphics Support<sup>[1]</sup>

Supports up to one NVIDIA® T1000

Discrete Graphics Offering

Graphics	Memory	Power	Connector	SLI / NVlink
NVIDIA T400	2GB GDDR6	40W	3x miniDP 1.4	None
NVIDIA T600	4GB GDDR6	40W	4x miniDP 1.4	None
NVIDIA T1000	4GB GDDR6	50W	4x miniDP 1.4	None

Notes:

1. Dual NVIDIA T400 will be available in August 2021

Monitor Support

Monitor Support

Supports multiple displays via onboard video ports and discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset  
Intel W580 chipset

Memory

Max Memory<sup>[1]</sup>  
Up to 128GB DDR4-3200  
Memory Type

- DDR4-3200 UDIMM non-ECC
- DDR4-3200 UDIMM ECC

Memory Slots  
Four DDR4 UDIMM slots, dual-channel capable

Memory Protection  
ECC on models with ECC DIMMs and Xeon processor

Notes:  
1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support<sup>[1]</sup>  
Up to 1x 3.5" SATA HDD + 1x 2.5" SATA HDD + 3x M.2 SSD  
• 3.5" HDD up to 4TB  
• 2.5" HDD up to 1TB  
• M.2 SSD up to 2TB each

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 1TB FIPS	-
3.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB	-
M.2 2280 SSD	PCIe NVMe, PCIe 4.0	-	256GB / 512GB / 1TB / 2TB	Opal

Storage Controllers <sup>[2]</sup>				
Storage Controller	Type	Interface	RAID	Cache
Onboard Intel RST PCIe RAID	Standard	PCIe NVMe	0/1	None
Onboard Intel RST SATA RAID	Standard	SATA 6.0Gb/s	0/1	None

Notes:  
1. Model with 10th Core processor supports 2x M.2 SSD  
2. Cannot install OS in SATA RAID 1 volume

Removable Storage

Optical Support  
Optional one 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader  
• SD card reader  
• No card reader

Multi-Media

Audio Chip  
High Definition (HD) Audio, Realtek® ALC623-CG codec

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
380W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical

Form Factor

Mini-tower (8.2L)

Dimensions (WxDxH)

92.5 x 309.7 x 339.5 mm (3.6 x 9.3 x 13.4 inches)

Weight

5.01 kg (11 lbs, maximum configuration)

Bays

- 1x 3.5" disk bay (standard)
- 1x 2.5" disk bay (optional, comes with disk)

M.2 Slots<sup>[1]</sup>

- Up to 2x M.2 SSD on model with 10th Core processor:
  - 1 via onboard slot with M.2 PCIe Gen 3
  - 1 via Single M.2 to PCIe adapter, PCIe Gen 3
- Up to 3x M.2 SSD on models with Xeon or 11th Core processor:
  - 2 via onboard slots with 1x M.2 PCIe Gen 4 and 1x M.2 PCIe Gen 3
  - 1 via Single M.2 to PCIe adapter, PCIe Gen 3

Expansion Slots

- One PCIe 4.0 x16
- One PCIe 3.0 x16 (x4 lanes)
- One PCIe 3.0 x1

Notes:

1. M.2 Gen 4 SSD works at Gen 3 speed on Gen 3 slot

CONNECTIVITY

Network

Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

Additional Ethernet options via PCIe adapter

WLAN + Bluetooth®

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2, M.2 Card
- No WLAN and Bluetooth

Ports<sup>[1]</sup>

Front Ports

- 2x USB 3.2 Gen 1
- 2x USB 3.2 Gen 2
- 1x USB-C 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

Rear Ports<sup>[2]</sup>

- 4x USB 3.2 Gen 1 (one supports Smart Power On)
- 2x DisplayPort™
- 1x serial (9-pin)
- 1x Ethernet (RJ-45)

- 1x line-out (3.5mm)

**Optional Rear Ports**

- 2x USB 2.0
- 2x USB 3.0
- 2x USB-C 3.2 Gen 2x2
- 1x video (DisplayPort, HDMI®, or USB-C)
- 1x serial
- 4x serial (via 4-port serial expansion card, PCIe x1)
- 1x parallel
- 2x PS/2
- None

---

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt™ 3: 40 Gbit/s;  
FireWire 400: 400 Mbit/s;  
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

## SECURITY & PRIVACY

### Security

**Security Chip**

Discrete TPM 2.0, TCG certified

**Physical Locks<sup>[1]</sup>**

- (Optional) Cable lock
- (Optional) E-lock
- Kensington® Security Slot
- Padlock Loop

**Chassis Intrusion Switch**

- Chassis intrusion switch
- No chassis intrusion switch

**BIOS Security**

- Administrator password
- Power-on password

---

**Notes:**

1. E-lock is not available in EMEA

## MANAGEABILITY

### System Management

**System Management**

- Intel vPro with Intel AMT 14.0 (vPro-enable processor and WiFi needed)
- Standard Manageability

### Diagnostic

**Diagnostic**

Lenovo UEFI Bootable Diagnostics

## SERVICE

### Warranty

## Base Warranty

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service with 9x5 NBD (for most models)
- No base warranty

## ENVIRONMENTAL

### Operating Environment

#### Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

#### Humidity

- Operating: 10% to 80%
- Storage: 10% to 90%

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold (on some models)
- ENERGY STAR® 8.0
- RoHS compliant

### ISV Certifications

#### ISV Certifications

Please visit [www.thinkworkstations.com/isv-certifications/](http://www.thinkworkstations.com/isv-certifications/)

