




Delock PCI Express Card > 1 x Serial RS-232 High Speed 921K with Voltage supply

Description

The Delock PCI Express card expands your system by one High Speed RS-232 port. Use this card for applications like data logging, machine control systems, automation, development or communication. By the extensive surge protection and the wide temperature range this card can be used in the industrial area. Connected devices can be supplied with voltage of 5 V or 12 V optionally.

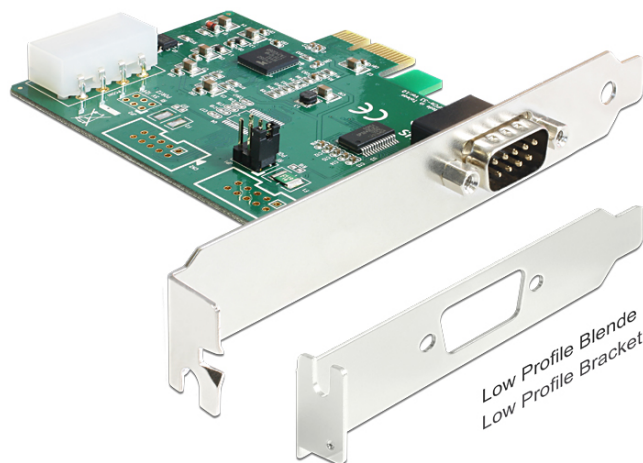

Specification

- Chipset: Exar 17V352
- Connector:
 - external:
 - 1 x Serial RS-232 Sub-D 9 Pin male
 - internal:
 - 1 x PCI Express x1, V2.0
 - 1 x 4 pin Molex power connector
- Baud rate: up to 921.6 Kb/s
- Compatible to 16C550 UART
- FIFO 256 Byte
- Data bit: 5, 6, 7, 8
- Stop bit: 1, 1.5, 2
- Parity: None, Even, Odd, Space, Mark
- Flow Control: RTS / CTS, XON / XOFF
- Selectable voltage supply 5 V / 12 V or RI of pin 9
- Further voltage supply 5 V / 12 V of pin 1, depending on connected device
- Operating temperature: -30 °C ~ +75 °C
- Storage temperature: -40 °C ~ +85 °C
- Ambient relative humidity max. 95 % (non-condensing)
- 15 kV ESD protection for all signals
- I/O address and IRQ assigned by the system

System requirements

- Windows XP/XP-64/Vista/Vista-64/7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6
- PC with a free PCI Express slot
- Power supply with a free Molex power connector

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item no. 89333

EAN: 4043619893331

Country of origin: Taiwan, Republic of China

Package: Box





Images

